


Foster 


Catalogue
2022

elegance, performance,
reliability, respect for the environment.
this is the mission of Foster
for you to Live the Quality.

FOSTER Collections

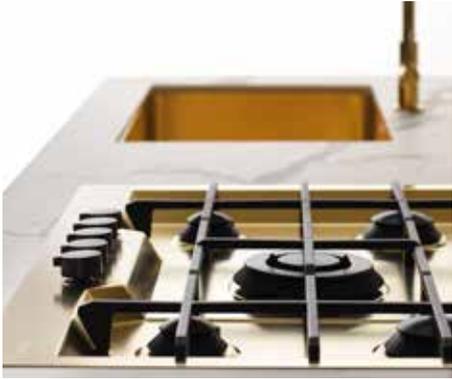

PVD Collections 08

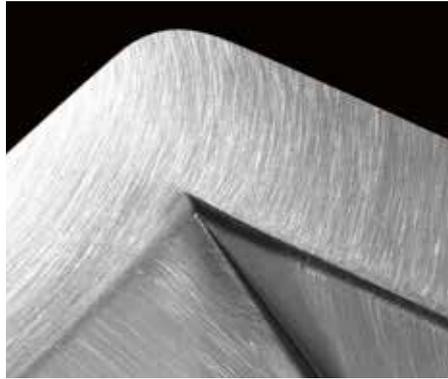

Vintage Collection 36



Foster Marine Collection 44

Sinks



50

Gas cooker hobs



214

Undermount sinks



112

Ovens
& Coordinated
products



247

Complements



140

Hoods



265

Mixer taps



156

Dishwashers



292

Induction hobs



190

Stainless Steel
Worktops



294





Quality in everyday life

Research, style and beauty, all in one stroke, the Foster brand.

The desire to find new solutions to improve the experience and enjoyment of one's kitchen, is what drives our research, and the source of our satisfaction. We have reached important goals in developing household appliances, and with the same enthusiasm we share and develop ideas with the most important kitchen manufacturers in Italy and worldwide.

This is the Foster philosophy: excellence in quality standards, great manufacturing craftsmanship, ever innovative solutions interpreted with our signature style and taste.



Who we are

Founded in 1973, Foster is an Italian company with four highly specialized manufacturing plants, active in more than 50 countries worldwide. It is an integrated organization with headquarters in the historic “Terranova palace” in Brescello, a small village known for the movies starring Don Camillo and Peppone, and a symbol of the countryside of northern Italy.



Inspired by art and culture

The Terranova palace is not just a building; it is the expression of Foster's love for art. Foster established its headquarters here in 1988, after the renovation of the former 17th century Franciscan convent. The restoration brought back the splendour of the prestigious frescoes and unearthed ancient historical artefacts.

The Terranova palace is a cultural heritage that the company presents to the community in all its glorious history, beauty and magnificence.

Foster was among the first Italian companies to join projects for environmental preservation and protection, and the building is now under the protection of the "Monuments and Fine Art Administration".

FOSTER Collections





A modern kitchen faucet with a black gooseneck and a textured silver base. The faucet is mounted on a stainless steel sink. The brand name "Foster" is visible on the side of the base.

A stainless steel gas cooktop with four burners, set into a grey countertop. The cooktop has a brushed metal finish and black burner caps.

A clear glass teapot with a silver handle and a black tea ball. The teapot is placed on a grey countertop next to the sink.

A stainless steel sink with a black interior, set into a grey countertop. The sink is positioned to the left of the faucet.

The background features a wall with decorative patterns, including a floral border and a circular inset with a landscape scene. The wall is painted in a light, warm tone.


PVD Collections





PVD treatment

It's obtained by a physical - not chemical - process, with a resistance superior to that of any other treatment.

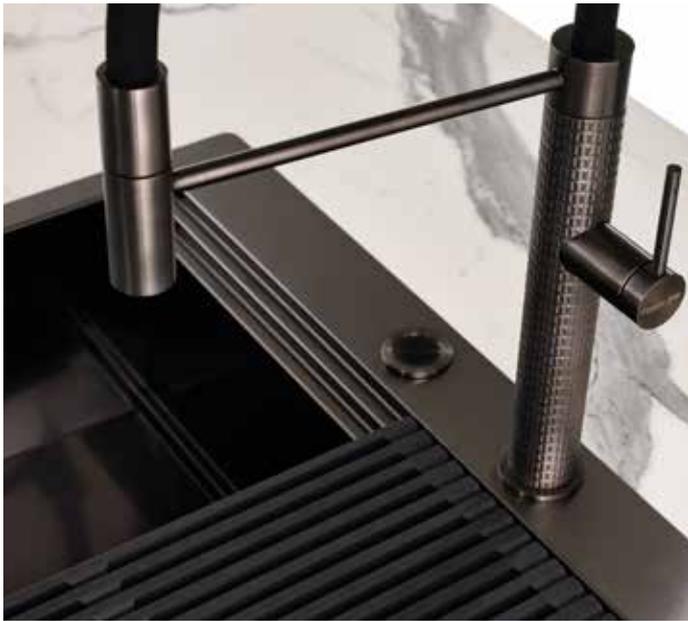

PVD Stainless steel features:

- exceptional superficial hardness
- more resistance against wear and abrasion
- more resistance against corrosion, solvents, detergents, high acidity food
- unalterable by UV rays
- eco-friendly
- hypoallergenic treatment

Respectful of your health and of our environment

The PVD treatment is totally **hypoallergenic**, and used in many applications for products which come into contact with the skin and with food. An additional safety for our health.

PVD steel is **100% green**. The manufacturing process does not release any harmful substances, and the product maintains all the qualities of stainless steel concerning eco-sustainability; it remains totally recyclable, and therefore fully environmentally friendly.

Brushed and Vintage finishes



PVD brushed Gun Metal



PVD brushed Gold



PVD brushed Copper



PVD Vintage Gun Metal



PVD Vintage Gold



PVD Vintage Copper








PVD Gun Metal Collection




Steel in a dark suit.

PVD Gun Metal Collections




Milanello Gun Metal Sinks

	Features	Version	Ref.	Technical Drawing
Cabinet 80 	AISI 304 Gun Metal dimensions: 806x520 1 bowl: 750x374 flush-mount (FT): web site up-mount (FTS): 789x503 drain: automatic Space Push (PO) 3 1/2"	 	1034 056	
Included: 2 Black Milanello grids (8100 602)	 Black grids configurations edge positioning	 Black grids configurations bottom positioning		Third tap hole available
Optional accessories: Z3 T8 M7 L3 L4 N3 N2 P2 T T2 Z Z2				

Cabinet 90 	AISI 304 Gun Metal bowl: 750x374 dimensions: 790x466 cut-out: web site drain: 3 1/2" Gun Metal		1034 856	
Included: 2 Black Milanello grids (8100 602)	 Black grids configurations edge positioning	 Black grids configurations bottom positioning		
Optional accessories: Z3 T8 L3 L4 M7 N3 N2 P2 T T2 Z Z2				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Included

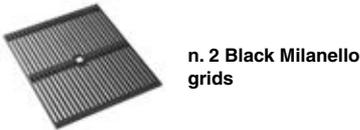

Accessories

sliding accessories under black grids



further accessories





*To use only with L3 chopping board **To use only with N3 chopping board

PVD Gun Metal Collections




KE Gun Metal Sinks

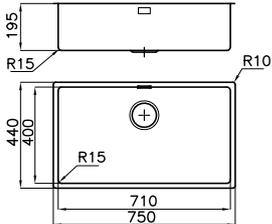	Features	Version	Ref.	Technical Drawing
Cabinet 80 	AISI 304 Gun Metal dimensions: 750x440 1 bowl: 710x400 cut-out: flush-mount (FT): web site* up-mount(FTS):730x420* drain: 3½"	 FT	2157 056	
		 FTS	 ST	
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (see page 19) Autom. waste fitting: PG PO (see page 148-149)	* the built-in cut-out requires a notch to house the overflow (see website)			
Cabinet 60 	AISI 304 Gun Metal dimensions: 540x440 1 bowl: 500x400 cut-out: flush-mount (FT): web site* up-mount(FTS):520x420* drain: 3½"	 FT	2155 056	
		 FTS	 ST	2155 856
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (see page 19) Autom. waste fitting: PG PO (see page 148-149)	* the built-in cut-out requires a notch to house the overflow (see website)			
Cabinet 60 	AISI 304 Gun Metal dimensions: 490x440 1 bowl: 450x400 cut-out: flush-mount (FT): web site* up-mount(FTS):470x420* drain: 3½"	 FT	2154 056	
		 FTS	 ST	
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (see page 19) Autom. waste fitting: PG PO (see page 148-149)	* the built-in cut-out requires a notch to house the overflow (see website)			

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.



KE Gun Metal Sinks

	Features	Version	Ref.	Technical Drawing
Cabinet 45 	AISI 304 Gun Metal dimensions: 440x440 1 bowl: 400x400 cut-out: flush-mount (FT): web site* up-mount(FTS):420x420* drain: 3½"	 FT	2156 056	
		 FTS	2156 856	
	AISI 304 Gun Metal bowl: 40x40 cm dimensions: 440x440 cut-out: see web site drain: 3½"	 ST	2156 856	

Accessories: **L3 L4 N2 N3 O2 P2 P4 S T T1**

T2 Z Z2 (see page 19)

Autom. waste fitting: **PG PO** (see page 148-149)


* the built-in cut-out requires a notch to house the overflow (see website)

Cabinet 40



AISI 304 Gun Metal
 bowl: **34x40 cm**
 dimensions: 380x440
 cut-out: see web site
 drain: 3½"
  ST

2153 856



Accessories: **L4 N2 N3 O2 P2 P4 R T2 T1 Z2**

(see page 19)



Autom. waste fitting: **PG PO** (see page 148-149)

Cabinet 30



AISI 304 Gun Metal
 bowl: **18x40 cm**
 dimensions: 222x442
 cut-out: see web site
 drain: 3½"
  ST

2151 856






Autom. waste fitting: **PG PO** (see page 148-149)

PVD Gun Metal Collections



NEW

KE Gun Metal Vintage Sinks

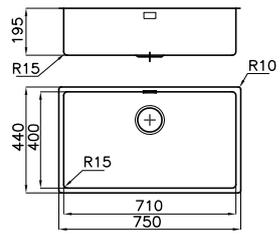	Features	Version	Ref.	Technical Drawing
Cabinet 80 	AISI 304 Gun Metal Vintage dimensions: 750x440 1 bowl: 710x400 cut-out: flush-mount (FT): web site* up-mount(FTS):730x420* drain: 3½"	 FT	2157 086	
		 FTS	 ST	
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (see page 19) Autom. waste fitting: PG PO (see page 148-149)	* the built-in cut-out requires a notch to house the overflow (see website)			
Cabinet 60 	AISI 304 Gun Metal Vintage dimensions: 540x440 1 bowl: 500x400 cut-out: flush-mount (FT): web site* up-mount(FTS):520x420* drain: 3½"	 FT	2155 086	
		 FTS	 ST	
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (see page 19) Autom. waste fitting: PG PO (see page 148-149)	* the built-in cut-out requires a notch to house the overflow (see website)			
Cabinet 45 	AISI 304 Gun Metal Vintage dimensions: 440x440 1 bowl: 400x400 cut-out: flush-mount (FT): web site* up-mount(FTS):420x420* drain: 3½"	 FT	2156 086	
		 FTS	 ST	
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (see page 19) Autom. waste fitting: PG PO (see page 148-149)	* the built-in cut-out requires a notch to house the overflow (see website)			

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Accessories



L3
Twin chopping board
41x41 cm
8644 004



L4
Glass chopping board
23x41 cm
8631 300



P4
Chopping board
with stainless steel
colander kit
8644 044



M
Sliding chopping
board 30x54 cm
8643 000



N2
HDPE chopping
board 27,2x42,5 cm
8657 001



N3
HDPE Twin chopping
board
31,7x42,5 cm
8644 101



O2
White plastic bowl
27,2x41,4 cm
8153 100



P2 **
Grating kit complete
with ring support and
food collection tray
8159 101



R
St. steel basket
34x40 cm
8611 000




S
St. steel basket 40x40
8612 000



White basket 40x40
8612 100

T *
St. steel dishes holder
25x35 cm
8100 154

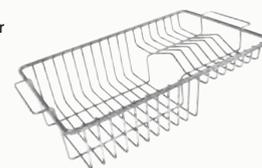

T1
St. steel dishes holder
25x42,5 cm
8100 201



T2 **
St. steel dishes holder
inox 21,4x37,9 cm
8100 303



Z *
St. steel colander
25x36 cm
8154 000




Z2 **
St. steel perforated
pan 21,5x38 cm
8151 000

PVD Gun Metal Collections

Skin Gun Metal

Single lever mixer tap with rotating barrel and movable shower.

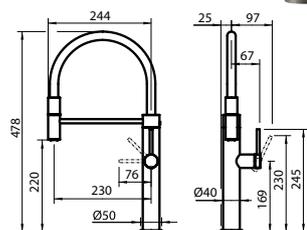



Aesthetic parts in AISI 316 with PVD treatment
strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
Built-in base: \varnothing 50 mm
rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.

8424 856
Gun Metal
Satin finish

Omega Plus Gun metal

Single lever mixer tap with rotating barrel and extractable shower head.

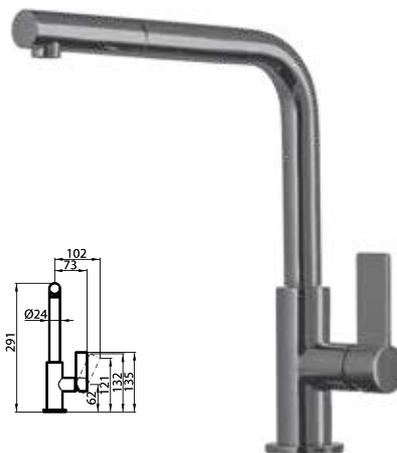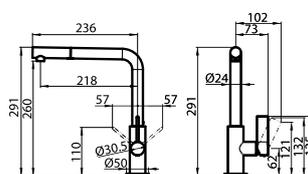


strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
Built-in base: \varnothing 50 mm
rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm
rear encumbrance
of control leverage: 35 mm

Ref.

8498 856
Gun Metal

Omega Gun metal

Single lever mixer tap with rotating barrel.

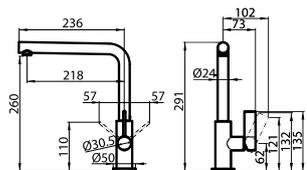

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
Built-in base: \varnothing 50 mm
rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm
rear encumbrance
of control leverage: 35 mm


Ref.

8497 856
Gun Metal

Evo Gun metal* Dispenser

Built-in liquid soap/detergent dispenser

* Polished gun metal on chromed finish;
it matches the Omega Gun Metal taps

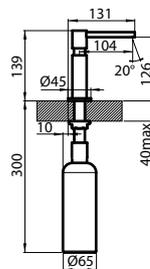

Ref.

8520 856
Gun Metal




Gun Metal Complements



Built-in socket-holders Reverse

Push socket slot in Gun Metal PVD stainless steel for flush-mount installation on worktops.
- 2 Schuko sockets - 1 USB port for charging
Cut-out: 215x88 mm

Ref. | |
8000 116

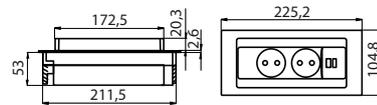

PO



Space Push Gun Metal automatic waste fitting with Push-button control and with perimeter overflow. Space and Gun-metal-basket caps supplied.

Ref. | |
8407 120



PG



Gun metal automatic waste fitting with round remote control and with perimeter overflow

Ref. | |
8407 110









PVD Gun Metal Collections

Foster *Milano*



Milanello Gun Metal Cooker hobs

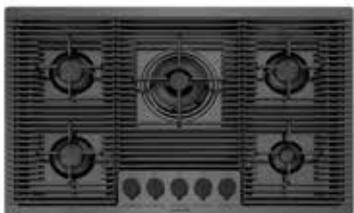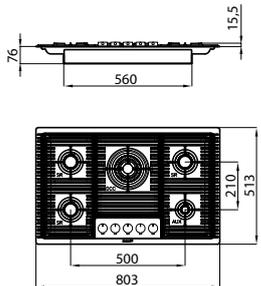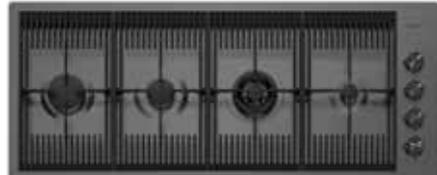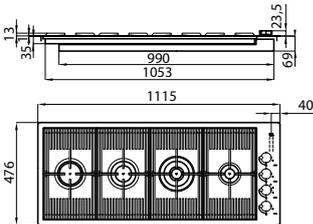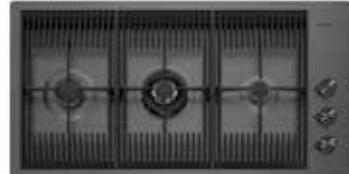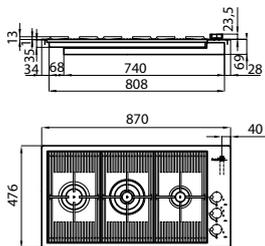	Features	Version	Ref.	Technical Drawing
 <p>NEW</p>	<p>AISI 304 Gun Metal Cast iron grids and enamelled burner covers. Flat burners Tot. power 10.250 W auxiliary: 1.000 W semi-rapid: 3x1.750 W double crown: 4.000 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	<p>FT</p> <p>FTS</p>	7682 006	<p>Filipot: 803x513 - cut-out (FT): see web site up-mount cut-out (FTS): 790x500</p> 
	<p>AISI 304 Gun Metal Cast iron grids and enamelled burner covers Tot. power 10.750 W auxiliary: 1.000 W semi-rapid: 1.750 W</p> <p>rapid: 3.000 W dual: 5.000 W Electric ignition Safety valves with ultra-rapid thermocouples</p>	<p>FT</p> <p>FTS</p>	7681 006	<p>Filipot: 1115x476 - cut-out (FT): see web site up-mount cut-out (FTS): 1098x459</p> 
	<p>AISI 304 Gun Metal Cast iron grids and enamelled burner covers Tot. power 7.750 W auxiliary: 1.000 W semi-rapid: 1.750 W</p> <p>dual: 5.000 W Electric ignition Safety valves with ultra-rapid thermocouples</p>	<p>FT</p> <p>FTS</p>	7680 006	<p>Filipot: 870x476 - cut-out (FT): see web site up-mount cut-out (FTS): 853x459</p> 



Accessories: **2** (see page 218)

Accessories: **2** (see page 218)

Accessories: **2** (see page 218)

PVD Gun Metal Collections

KE Gun Metal Cooker hobs

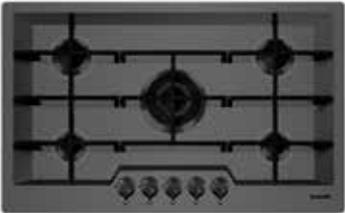	Features	Version	Ref.	Technical Drawing
	<p>AISI 304 Gun Metal Cast iron grids, gun metal burners and enamelled burner covers Tot. power 9.500 W auxiliary: 2x1.100 W semi-rapid: 2x1.750 W triple crown: 3.800 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	<p>FT FTS</p>	<p>7601 632</p>	<p>Filterpot: 803x513 - cut-out (FT): see web site up-mount cut-out (FTS): 790x500</p> 

Accessories: **2** (see page 218)



PVD Copper Collection



A warm old-time tinge.



PVD Copper Collections

Milanello Copper Sinks

NEW

Cabinet 80




Features	Version	Ref.	Technical Drawing
AISI 304 Copper dimensions: 806x520 1 bowl: 750x374 flush-mount (FT): web site up-mount (FTS): 789x503 drain: automatic Space Push (PB) 3½"	FT FTS	1034 058	


Included: **2 Black Milanello grids** (8100 602)

Optional accessories:

Z3 T8 M7 L3 L4 N3 N2 P2 T T2 Z Z2



Black grids configurations edge positioning



Black grids configurations bottom positioning

Third tap hole available

Cabinet 90



AISI 304 Copper bowl: 750x374 dimensions: 790x466 cut-out: web site drain: 3½" Gun Metal	ST	1034 858	
---	----	----------	--

Included: **2 Black Milanello grids** (8100 602)


Optional accessories:

Z3 T8 L3 L4 M7 N3 N2 P2 T T2 Z Z2

autom. waste fitting: **PB** (pages 148-149)



Black grids configurations edge positioning



Black grids configurations bottom positioning

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Included



n. 2 Black Milanello grids

Accessories

sliding accessories under black grids



Z3
St. steel perforated pan 21,5x40 cm
8156 000



T8
St. steel dishes holder inox 21,4x37,2 cm
8100 306

further accessories



L3
Twin chopping board 41x41 cm
8644 004



L4
Glass chopping board 23x41 cm
8631 300



M7
Walnut cutting board 15,8x42,4 cm
8642 003



N2
HDPE chopping board 27,2x42,5 cm
8657 001



N3
HDPE Twin chopping board 31,7x42,5 cm
8644 101



P2 **
Grating kit complete with ring support and food collection tray
8159 101



T *
St. steel dishes holder inox 25x35 cm
8100 154



T2 **
St. steel dishes holder inox 21,4x37,9 cm
8100 303



Z *
St. steel colander 25x36 cm
8154 000






Z2 **
St. steel perforated pan 21,5x38 cm
8151 000

*To use only with L3 chopping board **To use only with N3 chopping board








KE Copper and Copper Vintage Sinks

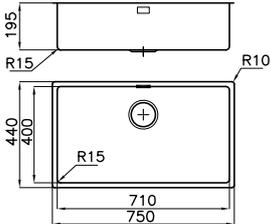
	Features	Version	Ref.	Technical Drawing
Cabinet 80 	AISI 304 Copper bowl: 71x40 cm dimensions: 750x440 cut-out: see web site drain: 3½	 ST	2157 858	
		Copper Vintage version 	 ST	
Accessories: L1 L3 L4 N2 N3 O2 P1 P2 S T T1 T2 Z Z2 autom. waste fitting: PB (pages 148-149)				
Cabinet 60 	AISI 304 Copper bowl: 50x40 cm dimensions: 544x444 cut-out: see web site drain: 3½	 ST	2155 858	
		Copper Vintage version 	 ST	
Accessories: L1 L3 L4 N2 N3 O2 P1 P2 S T T1 T2 Z Z2 autom. waste fitting: PB (pages 148-149)				
Cabinet 45 	AISI 304 Copper bowl: 40x40 cm dimensions: 440x440 cut-out: see web site drain: 3½	 ST	2156 858	
		Copper Vintage version 	 ST	
Accessories: L1 L3 L4 N2 N3 O2 P1 P2 S T T1 T2 Z Z2 autom. waste fitting: PB (pages 148-149)				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.


PVD Copper Collections

Milanello Copper Cooker hobs

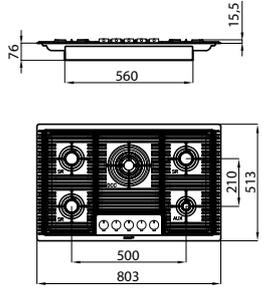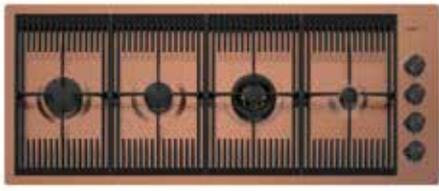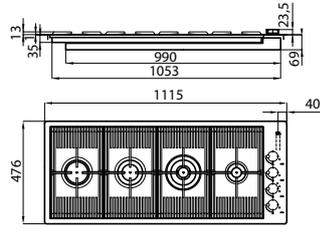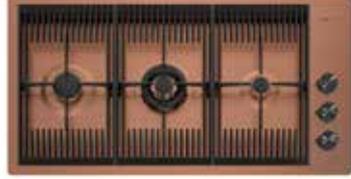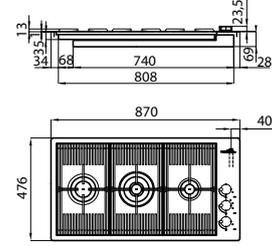	Features	Version	Ref.		Technical Drawing
 <p>NEW</p> <p>Accessories: 2 (see page 218)</p>	<p>AISI 304 Copper Cast iron grids and enamelled burner covers. Flat burners Tot. power 10.250 W auxiliary: 1.000 W semi-rapid: 3x1.750 W double crown: 4.000 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	<p> FT</p> <p> FTS</p>	<p>7682 008</p> <p>7682 008</p>		<p>Filtop: 803x513 - cut-out (FT): see web site up-mount cut-out (FTS): 790x500</p> 
 <p>Accessories: 2 (see page 218)</p>	<p>rapid: 3.000 W dual: 5.000 W Electric ignition Safety valves with ultra-rapid thermocouples</p>	<p> FT</p> <p> FTS</p>	<p>7681 008</p>		<p>Filtop: 1115x476 - cut-out (FT): see web site up-mount cut-out (FTS): 1098x459</p> 
 <p>Accessories: 2 (see page 218)</p>	<p>dual: 5.000 W Electric ignition Safety valves with ultra-rapid thermocouples</p>	<p> FT</p> <p> FTS</p>	<p>7680 008</p>		<p>Filtop: 870x476 - cut-out (FT): see web site up-mount cut-out (FTS): 853x459</p> 

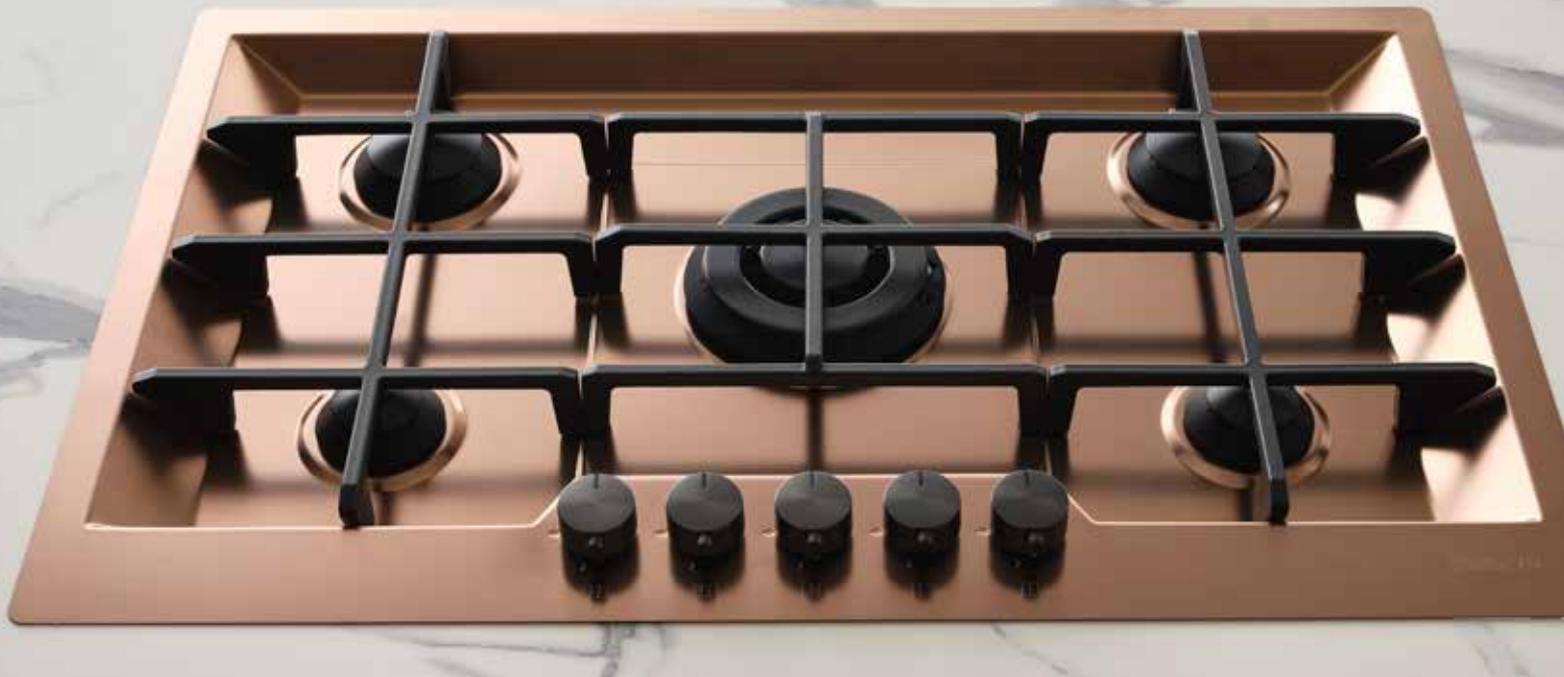

KE Copper Cooker hob

Features	Version	Ref.	Technical Drawing
 <p>AISI 304 Copper Cast iron grids, gun metal burners and enamelled burner covers Tot. power 9.500 W auxiliary: 2x1.100 W semi-rapid: 2x1.750 W triple crown: 3.800 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p> <p>Accessories: 2 (see page 218)</p>	<p>FT</p> <p>FTS</p>	<p>7601 866</p>	<p>Filetop: 803x513 - cut-out (FT): see web site up-mount cut-out (FTS): 790x500</p> 

Copper finish mixers and complements

Omega Copper

Single lever mixer tap
with rotating barrel
(see page 182).



Ref.
8497 400
copper

Copper Built-in socket-holders Reverse

Push socket slot in
Copper PVD stainless
steel for flush-mount
installation on worktops.
(see page 154).



Ref.
8000 118
copper

PVD Gold Collection









Noble and with character.



PVD Gold Collections

Milanello Gold Sinks

NEW

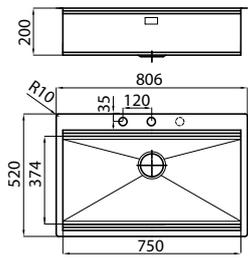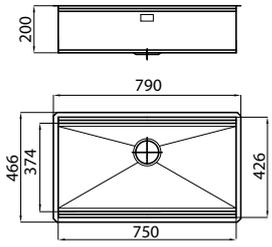	Features	Version	Ref.	Technical Drawing
Cabinet 80 	AISI 304 Gold dimensions: 806x520 1 bowl: 750x374 flush-mount (FT): web site up-mount(FTS):789x503 drain: automatic Space Push (PD) 3½"	 	1034 059	
Included: 2 Black Milanello grids (8100 602)	 Black grids configurations edge positioning	 Black grids configurations bottom positioning		Third tap hole available
Optional accessories: Z3 T8 M7 L3 L4 N3 N2 P2 T T2 Z Z2				
Cabinet 90 	AISI 304 Gold bowl: 750x374 dimensions: 790x466 cut-out: web site drain: 3½" Gold		1034 859	
Included: 2 Black Milanello grids (8100 602)	 Black grids configurations edge positioning	 Black grids configurations bottom positioning		
Optional accessories: Z3 T8 L3 L4 M7 N3 N2 P2 T T2 Z Z2 autom. waste fitting: PD (pages 148-149)				

Included



n. 2 Black Milanello grids

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Accessories

sliding accessories under black grids



Z3
St. steel perforated pan 21,5x40 cm
8156 000



T8
St. steel dishes holder inox 21,4x37,2 cm
8100 306

further accessories



L3
Twin chopping board 41x41 cm
8644 004



L4
Glass chopping board 23x41 cm
8631 300



M7
Walnut cutting board 15,8x42,4 cm
8642 003



N2
HDPE chopping board 27,2x42,5 cm
8657 001



N3
HDPE Twin chopping board 31,7x42,5 cm
8644 101



P2 **
Grating kit complete with ring support and food collection tray
8159 101



T *
St. steel dishes holder inox 25x35 cm
8100 154



T2 **
St. steel dishes holder inox 21,4x37,9 cm
8100 303






Z *
St. steel colander 25x36 cm
8154 000



Z2 **
St. steel perforated pan 21,5x38 cm
8151 000

*To use only with L3 chopping board **To use only with N3 chopping board



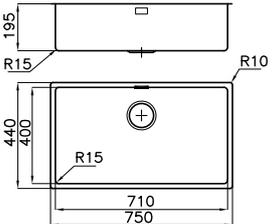




	Features	Version	Ref.	Technical Drawing
Cabinet 80 	AISI 304 Gold bowl: 71x40 cm dimensions: 750x440 cut-out: see web site drain: 3½	 ST	2157 859	
	Gold Vintage version 	 ST	2157 889	
Accessories: L1 L3 L4 N2 N3 O2 P1 P2 S T T1 T2 Z Z2	autom. waste fitting: PD (pages 148-149)			
<hr/>				
Cabinet 60 	AISI 304 Gold bowl: 50x40 cm dimensions: 544x444 cut-out: see web site drain: 3½	 ST	2155 859	
	Gold Vintage version 	 ST	2155 889	
Accessories: L1 L3 L4 N2 N3 O2 P1 P2 S T T1 T2 Z Z2	autom. waste fitting: PD (pages 148-149)			
<hr/>				
Cabinet 45 	AISI 304 Gold bowl: 40x40 cm dimensions: 440x440 cut-out: see web site drain: 3½	 ST	2156 859	
	Gold Vintage version 	 ST	2156 889	
Accessories: L1 L3 L4 N2 N3 O2 P1 P2 S T T1 T2 Z Z2	autom. waste fitting: PD (pages 148-149)			
<hr/>				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.


PVD Gold Collections

Milanello Gold Cooker hobs **NEW**

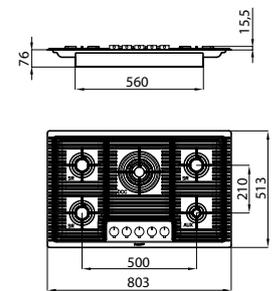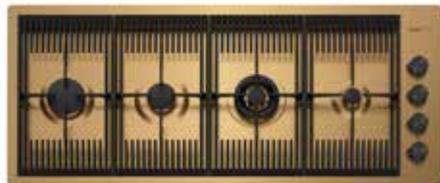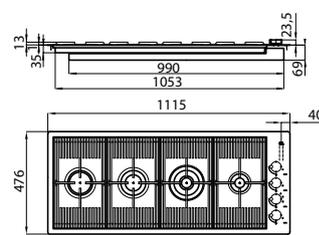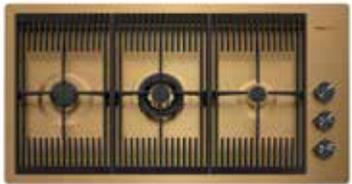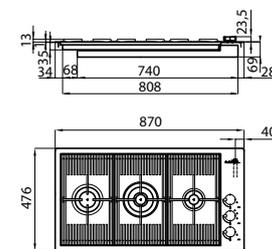	Features	Version	Ref.	Technical Drawing
	<p>AISI 304 Gold Cast iron grids and enamelled burner covers. Flat burners Tot. power 10.250 W auxiliary: 1.000 W semi-rapid: 3x1.750 W double crown: 4.000 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	<p>FT</p> <p>FTS</p>	7682 009	<p>Filopot: 803x513 - cut-out (FT): see web site up-mount cut-out (FTS): 790x500</p> 
Accessories: 2 (see page 218)				
	<p>AISI 304 Gold Cast iron grids and enamelled burner covers Tot. power 10.750 W auxiliary: 1.000 W semi-rapid: 1.750 W</p>	<p>FT</p> <p>FTS</p>	7681 009	<p>Filopot: 1115x476 - cut-out (FT): see web site up-mount cut-out (FTS): 1098x459</p> 
<p>rapid: 3.000 W dual: 5.000 W Electric ignition Safety valves with ultra-rapid thermocouples</p>				
Accessories: 2 (see page 218)				
	<p>AISI 304 Gold Cast iron grids and enamelled burner covers Tot. power 7.750 W auxiliary: 1.000 W semi-rapid: 1.750 W</p>	<p>FT</p> <p>FTS</p>	7680 009	<p>Filopot: 870x476 - cut-out (FT): see web site up-mount cut-out (FTS): 853x459</p> 
<p>dual: 5.000 W Electric ignition Safety valves with ultra-rapid thermocouples</p>				
Accessories: 2 (see page 218)				



KE Gold Cooker hob

	Features	Version	Ref.	Technical Drawing
	<p>AISI 304 Gold Cast iron grids, gun metal burners and enamelled burner covers Tot. power 9.500 W auxiliary: 2x1.100 W semi-rapid: 2x1.750 W triple crown: 3.800 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	<p> FT</p> <p> FTS</p>	<p>7601 932</p>	<p>Filetop: 803x513 - cut-out (FT): see web site up-mount cut-out (FTS): 790x500</p> 

Accessories: **2** (see page 218)

Gold finish mixers and complements

Omega Gold


Single lever mixer tap
with rotating barrel.
(see page 182).



Ref.
8497 400
gold

Gold Built-in socket-holders Reverse


Push socket slot in Gold
PVD stainless steel for
flush-mount installation
on worktops.
(see page 154).

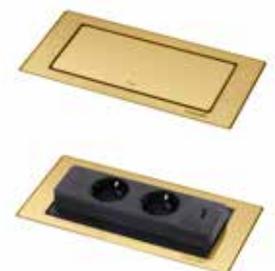

Ref.
8000 119
gold

Vintage Collection


A stainless steel surface
with no fear of wear
and tear.

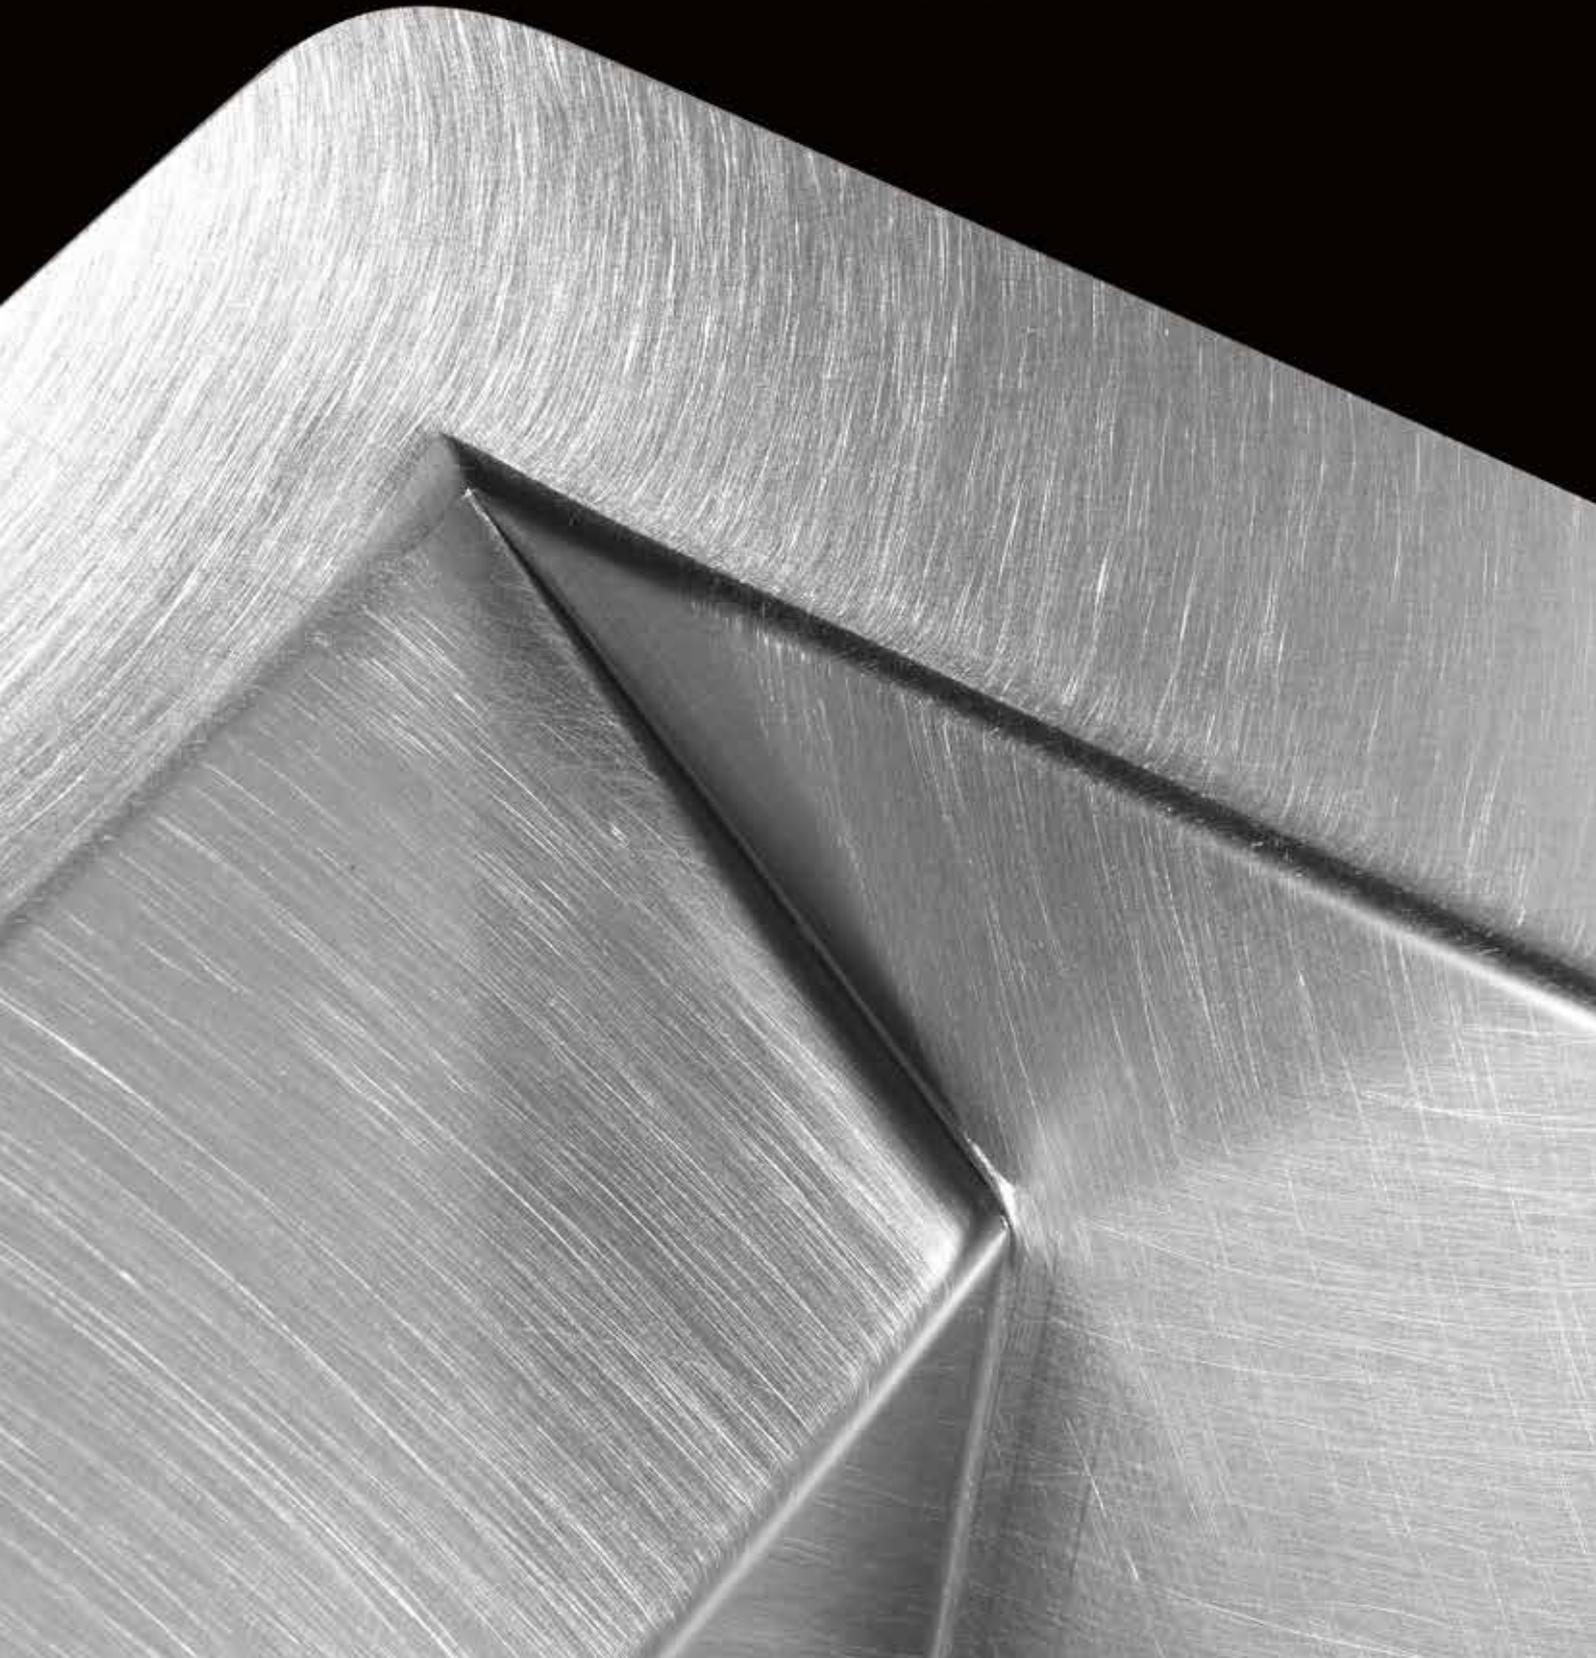

The well-worn stainless steel.

Vintage is an exclusive Foster finish whose main feature is the specific asymmetrical brushing, which mimics the wear and tear of time.

This finish is obtained completely by hand, and is now proposed on a wide range of products, to offer you a large choice of matchings.

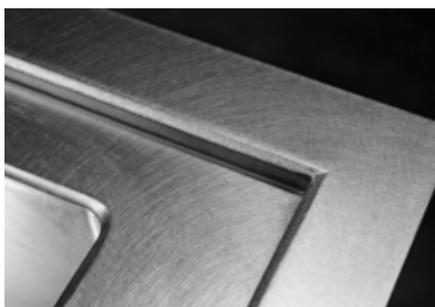


The Vintage finish is available on sinks, cooker hobs ovens and worktops, so as to offer a distinctive feature for the whole kitchen.






The Vintage finish is available also in combination with the sophisticated PVD colours. Discover the range in the section PVD Collections.

Vintage Collections

GK Vintage sinks

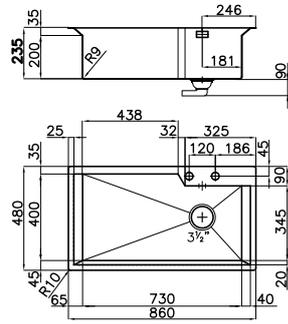	Features	Version	Ref.	Technical Drawing
Cabinet 90 	AISI 304 vintage bowl: 63x40 cm dimensions: 740x450 cut-out: see web site drain: SPACE 3½"	FT FTS	1402 080	
Included: PA Optional accessories: M4 N4 T2 P2 Z2				
<i>Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.</i>				

Flush-mount KE Vintage sinks

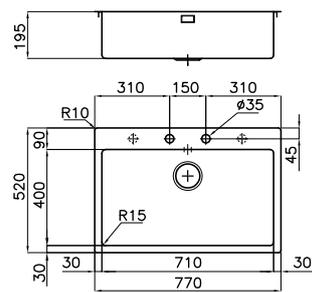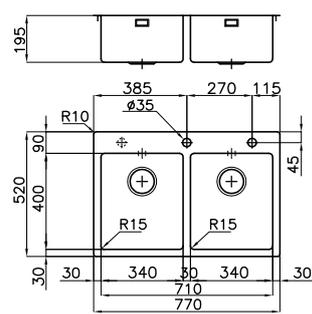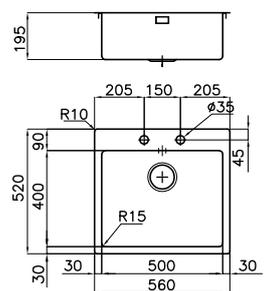	Features	Version	Ref.	Technical Drawing
NEW Cabinet 80 	AISI 304 Vintage dimensions: 770x520 1 bowl: 710x400 flush-mount (FT): web site up-mount (FTS): 758x508 drain: autom. 3½" PM	FT FTS	2266 080	
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2				
Third and fourth tap hole available				
Cabinet 80 	AISI 304 Vintage dimensions: 770x520 2 bowls: 340x400 flush-mount (FT): web site up-mount (FTS): 758x508 drain: autom. 3½" PM	FT FTS	2269 080	
Accessories: N2 N3 O2 P2 P4 R T1 T2 Z2				
Third tap hole available				
Cabinet 60 	AISI 304 Vintage dimensions: 560x520 1 bowl: 500x400 flush-mount (FT): web site up-mount (FTS): 548x508 drain: autom. 3½" PM	FT FTS	2265 080	
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2				
Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.				

Flush-mount KE Vintage sinks

	Features	Version	Ref.	Technical Drawing
--	----------	---------	------	-------------------


Cabinet 60



AISI 304 Vintage
 dimensions: **510x520**
 1 bowl: **450x400**
 flush-mount (FT): web site
 up-mount(FTS):498x508
 drain: **autom. 3½" PM**



2264 080

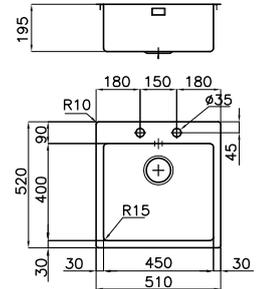

Accessories: **L3 L4 N2 N3 O2 P2 P4 S T T1**
T2 Z Z2

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Accessories



L3
 Twin chopping board
 41x41 cm
 8644 004



L4
 Glass chopping board
 23x41 cm
 8631 300



M
 Sliding chopping
 30x54 cm
 8643 000



M4
 Tagliere scorrevole
 Iroko
 8656 001



N2
 HDPE chopping
 board 27,2x42,5 cm
 8657 001



N3
 HDPE Twin
 chopping board
 31,7x42,5 cm
 8644 101



N4
 Tagliere Twin in
 HDPE
 8644 100



O2
 White plastic bowl
 27,2x41,4 cm
 8153 100



P4
 Chopping board
 with stainless steel
 colander kit
 8644 044



P2 **
 Grating kit complete
 with ring support and
 food collection tray-
 8159 101



R
 St. steel basket
 34x40 cm
 8611 000



S
 St. steel basket 40x40
 8612 000

 White basket 40x40
 8612 100



T *
 St. steel dishes holder
 25x35 cm
 8100 154



T1
 St. steel dishes holder
 25x42,5 cm
 8100 201



T2 **
 St. steel dishes holder
 inox 21,4x37,9 cm
 8100 303



Z *
 St. steel colander
 25x36 cm
 8154 000





Z2 **
 St. steel perforated pan
 21,5x38 cm
 8151 000

*To use only with L3 chopping board **To use only with N3 chopping board



Vintage Collections

Flush-mount KE vintage bowls

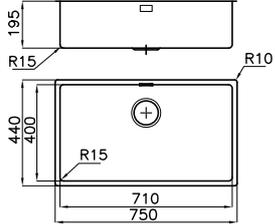	Features	Version	Ref.	Technical Drawing
NEW				
Cabinet 80	AISI 304 Vintage dimensions: 750x440 1 bowl: 710x400 flush-mount (FT): web site up-mount(FTS):730x420* drain: 3½"	 	2157 080	
	* the built-in cut-out requires a notch to house the overflow (see website)			
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2				
Autom. waste fitting: PA PE PM PL PP PS (see page 148-149)				
Cabinet 60	AISI 304 Vintage dimensions: 540x440 1 bowl: 500x400 flush-mount (FT): web site up-mount(FTS):520x420* drain: 3½"	 	2155 080	
	* the built-in cut-out requires a notch to house the overflow (see website)			
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2				
Autom. waste fitting: PA PE PM PL PP PS (see page 148-149)				


Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Flush-mount KE vintage bowls

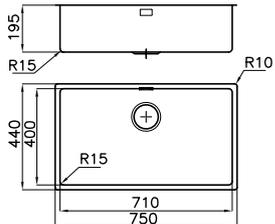	Features	Version	Ref.	Technical Drawing
NEW				
Cabinet 80	AISI 304 Vintage bowl: 71x40 cm dimensions: 750x440 cut-out: see web site drain: 3½"		2157 880	
				
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2				
Autom. waste fitting: PA PE PM PL PP PS (see page 148-149)				
Cabinet 60	AISI 304 Vintage bowl: 50x40 cm dimensions: 544x444 cut-out: see web site drain: 3½"		2155 880	
				
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2				
Autom. waste fitting: PA PE PM PL PP PS (see page 148-149)				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Flush-mount KE vintage bowls

	Features	Version	Ref.	Technical Drawing
Cabinet 45	AISI 304 Vintage bowl: 40x40 cm dimensions: 440x440 cut-out: see web site drain: 3½	 ST	2156 880	




Accessories: **L1 L3 L4 N2 N3 O2 P2 P4 S T**
T1 T2 Z Z2

Autom. waste fitting: **PA PE PM PL PP PS**
(see page 148-149)

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.



Accessories

	L3 Twin chopping board 41x41 cm 8644 004		L4 Glass chopping board 23x41 cm 8631 300		M Sliding chopping 30x54 cm 8643 000
	N2 HDPE chopping board 27,2x42,5 cm 8657 001		N3 HDPE Twin chopping board 31,7x42,5 cm 8644 101		O2 White plastic bowl 27,2x41,4 cm 8153 100
	P2 ** Grating kit complete with ring support and food collection tray 8159 101		P4 Chopping board with stainless steel colander kit 8644 044		R St. steel basket 34x40 cm 8611 000
	S St. steel basket 40x40 8612 000 White basket 40x40 8612 100		T * St. steel dishes holder 25x35 cm 8100 154		T1 St. steel dishes holder 25x42,5 cm 8100 201
	T2 ** St. steel dishes holder inox 21,4x37,9 cm 8100 303		Z * St. steel colander 25x36 cm 8154 000		Z2 ** St. steel perforated pan 21,5x38 cm 8151 000



*To use only with L3 chopping board **To use only with N3 chopping board

Vintage Collections

FL Vintage Cooker hob

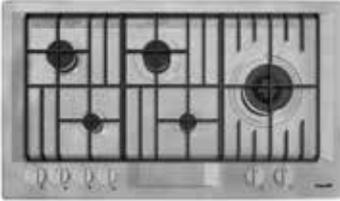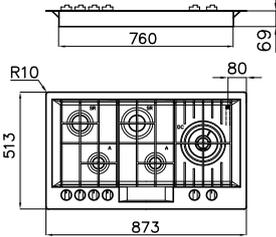	Features	Version	Ref.	Technical Drawing
	<p>AISI 304 Vintage Cast iron grids and enamelled burner covers Tot. power 10.500 W auxiliary: 2x1.000 W dual AE: 5.000 W semi-rapid: 2x1.750 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	<p>FT</p> <p>FTS</p>	7206 082	<p>Filtop: 873x513 - cut-out (FT): see web site up-mount cut-out (FTS): 860x500</p> 
Accessories: 2 (see page 218)				

KE Black Vintage Cooker hob

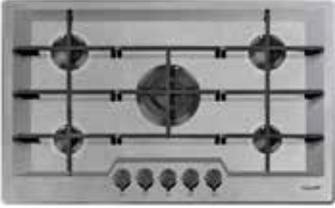	Features	Version	Ref.	Technical Drawing
	<p>AISI 304 Vintage Cast iron grids, gun metal burners and enamelled burner covers Tot. power 9.500 W auxiliary: 2x1.100 W semi-rapid: 2x1.750 W triple crown: 3.800 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	<p>FT</p> <p>FTS</p>	7601 082	<p>Flush-mount: 803x513 - cut-out (FT): see web site up-mount cut-out (FTS): 790x500</p> 
Accessories: 2 (see page 218)				

KE Black hob with Vintage finish



FL Vintage oven

Finish

Ref.

Technical Drawing

FL Vintage - 90

multifunctional 90x48 - 91 litres

VINTAGE
ANTI-TOUCH




7107 042



- Multifunctional oven 90x48 cm, 91 litres capacity
- 10 cooking functions
- Electronic programming of start-end of cooking
- Retractable selection knobs
- Collapsible double grill
- 2 telescopic guides
- Door: 3-glazed
- Black finish handle
- Full-Glass door
- Removable door glasses
- Easy-Clean enamelling
- Protection for grill heating element
- Cooling system with tangential ventilation
- Asymmetric double halogen light, light-on at door opening
- Door contact switch
- Energy class: A
- Power supply: 220-240V 50-60Hz

Standard accessories: deep tray stainless steel grid

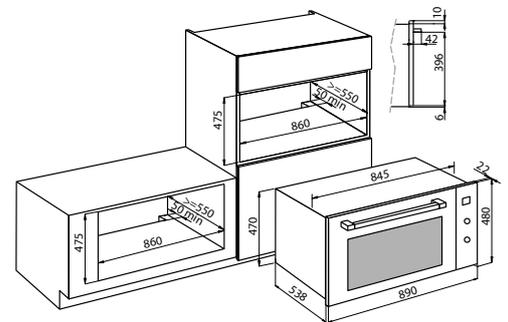

BOTTOM COOKING	TRADIT. COOKING	INTENSIVE COOKING	FANNED COOKING	CENTRAL GRILL	DOUBLE GRILL	BOTTOM COOK. + GRILL	FANNED + MAXI GRILL	FANNED + BOTTOM COOK.	DEFROST

Vintage Complements




Vintage Built-in socket-holders Reverse

Vintage Stainless steel push-push built-in socket-holder
- 2 Schuko sockets - 1 USB port for charging

Cut-out: 215x88 mm

Ref.
8000 117

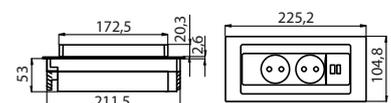



Foster
marine
Collection

Ideal for
seaside use.





**AISI
316**

Used in the boat industry, this type of steel grants a **better resistance to sea salt, detergents and acids in food.**







Gamma 3 vie - AISI 316
(84961 00 - pag. 173)

suggested mixer taps

FM Marine sinks

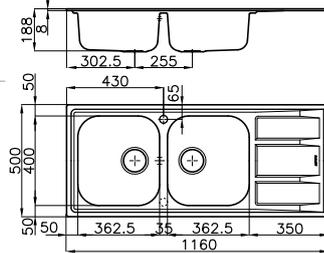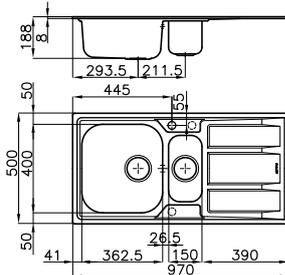	Features	Version	Ref.	Technical Drawing
<p>NEW</p> <p>Cabinet 80/(90)^T (rif. pag. 55)</p>  <p><i>In foto Version sinistra</i></p> <p>Accessories: L4 M N2 R T4 Autom. waste fitting: PR PC (see page 149)</p>	<p>AISI 316 Stainless Steel dimensions: 1160x500 2 bowls: 362,5x400 incasso: 1140x480 drain: 3½"</p>		<p>1972 961 dx 1972 962 sx</p>	 <p>Second tap hole available</p>
<p>Cabinet 60/(80)^T (rif. pag. 55)</p>  <p><i>In foto Version sinistra</i></p> <p>Accessories: M N2 Q R T4 X Autom. waste fitting: PR PC (see page 149)</p>	<p>AISI 316 Stainless Steel dimensions: 970x500 2v: 362,5x400+150x300 incasso: 950x480 drain: 3½"</p>		<p>1973 961 dx 1973 962 sx</p>	 <p>Second and third tap hole available</p>

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

FM Marine sinks

NEW


Cabinet 80(90)^T (rif. pag. 55)



AISI 316 Stainless Steel
 dimensions: **860x500**
 2 bowls: **362,5x400**
 incasso: 840x480
 drain: 3½"



1974 960

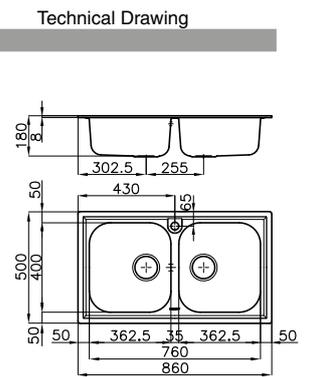

Accessories: **L4 M N2 R T4**

Cabinet 45




In foto Version sinistra

AISI 316 Stainless Steel
 dimensions: **860x500**
 1 bowl: **362,5x400**
 incasso: 840x480
 drain: 3½"



1971 961 dx
 1971 962 sx

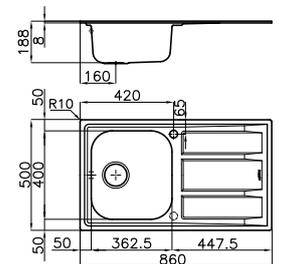

Second tap hole available

Accessories: **L4 M N2 R T4**

Autom. waste fitting: **PR PC** (see page 149)

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Accessories



L4
 Glass chopping board
 23x41 cm
 8631 300



M
 Sliding chopping board
 30x54 cm
 8643 000



N2
 HDPE chopping board
 27,2x42,5 cm
 8657 001



Q
 White colander
 17x32 cm
 8151 100



R
 St. steel basket
 34x40 cm
 8611 000





T4
 St. steel dishes holder
 25x43 cm
 8100 301



X
 St. steel colander
 17x32 cm
 8154 043



KF Marine Cooker hob

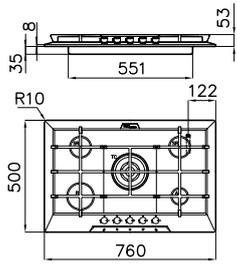	Features	Version	Ref.		Technical Drawing
 <p>available until exhaustion</p> <p>Accessories: 2 (see page 218)</p>	<p>AISI 316 Stainless Steel Cast iron grids and enamelled burner covers Tot. power 10.700 W auxiliary: 1.000 W semi-rapid: 2x1.750 W rapid: 2.700 W triple crown: 3.500 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	<p>STD</p>	<p>7666 962</p>	<p>Strait cut-out</p> 	<p>Dimensions: 760x500 - cut-out: 560x480</p>  <p>Power supply: 220-240 V 50-60 Hz</p> <p>Model which cannot be welded into stainless steel worktops</p>




A gas hob entirely in **AISI316** stainless steel, which guarantees the best resistance to the corrosive effects of acids, salinity and detergents.

Marine Mixer Taps - AISI 316

Tube

Single lever mixer tap with rotating barrel and movable shower.
AISI 316 stainless steel.


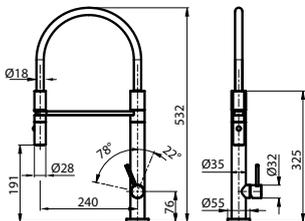


strengthening plate is included
 hole for tap's building-in: \varnothing 35 mm
 Built-in base: \varnothing 55 mm
 rotating angle: 360°
 ceramic disc cartridge
 max worktop thickness: 40 mm
 rear encumbrance
 of control leverage: 25 mm

Ref.
8477 100
 satin finish/
 black

Skin

Single lever mixer tap with rotating barrel and movable shower.

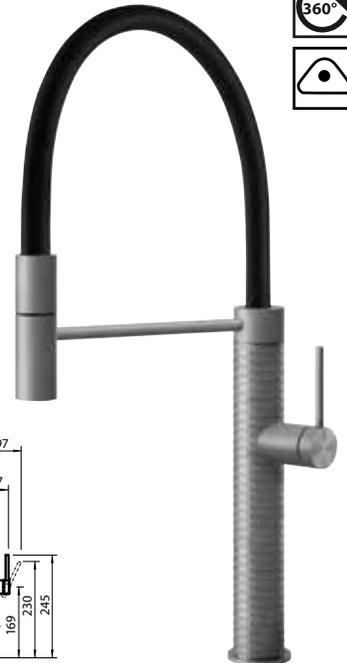
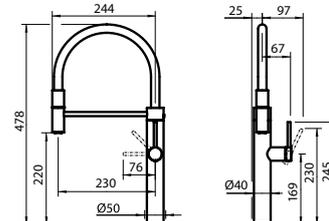


Aesthetic parts in AISI 316
 strengthening plate is included
 hole for tap's building-in: \varnothing 35 mm
 built-in base: \varnothing 50 mm
 rotating angle: 360°
 ceramic disc cartridge
 max worktop thickness: 40 mm

Ref.
8424 100
 satin finish

Gamma 3 vie

Three-way mixer tap with dual control and rotating barrel. The three-way system allows supply of hot/cold water and filtered water for alimentary use.
AISI 316 stainless steel.

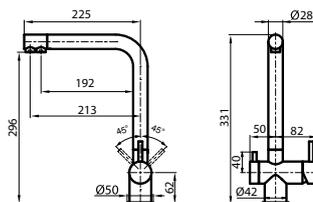



strengthening plate is included
 hole for tap's building-in: \varnothing 35 mm
 Built-in base: \varnothing 50 mm
 rotating angle: 360°
 ceramic disc cartridge
 max worktop thickness: 50 mm

Ref.
8496 100
 satin
 finish

Bert

Single lever mixer tap with rotating barrel and extractable shower head.
AISI 316 stainless steel.

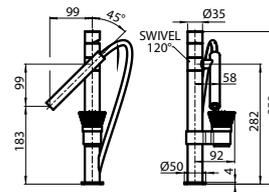

strengthening plate is included
 hole for tap's building-in: \varnothing 35 mm
 Built-in base: \varnothing 54 mm
 rotating angle: 120°
 ceramic disc cartridge
 max worktop thickness: 50 mm
 Supplied with Hydrobrush

Ref.
8428 100
 satin
 finish



THE SINKS



- | | | | |
|-----------------------------------|--|---------------------------------------|---|
| Foster Milano
p. 56 |  | Triplo Invaso
Workstation
p. 92 |  |
| Milanello
Workstation
p. 60 |  | EVO
p. 94 |  |
| New Wave
p. 66 |  | KS
p. 96 |  |
| GK
p. 68 |  | Elettra
p. 98 |  |
| S4001
p. 70 |  | FM and
FM Marine
p. 100 |  |
| S4000
p. 74 |  | Big Bowl
p. 102 |  |
| Quadra
p. 76 |  | Uragano
p. 104 |  |
| Fortyfour
p. 80 |  | Tornado
p. 105 |  |
| CQ
p. 81 |  | Angolare
p. 107 |  |
| Master
p. 82 |  | Circolari
p. 108 |  |
| FL
p. 83 |  | S1000
p. 109 |  |
| KE
p. 84 |  | S1000
Single bowl
p. 111 |  |
| Stripe
p. 90 |  | Undermount
sinks
p. 112 |  |

Designer finishes by Foster

- the best match of LOOKS and FUNCTIONALITY
- the best easiness of CLEANING and BRIGHTNESS over time



 Foster finish

Foster brushed finish

The steel is treated with special natural fibres that give it the characteristic extrafine satin finish that is highly elegant and functional. **This makes the surfaces very smooth and easy to clean.**

PVD finish

NEW

A new look for the classic, exclusive AISI 304 steel, thanks to the innovative PVD physical treatment (Physical Vapor Deposition). This allows the deposition of precious metals on steel surfaces, giving a unique look and greater resistance to scratches and wear.

Available in Gun Metal, Gold and Copper finish.




Vintage finish

NEW

An artificially worn look, along with the convenience of a steel surface that is not afraid of scratches and nicks.

The asymmetric brushing obtained with traditional methods simulates the signs of aging and gives the steel a new and original appeal.

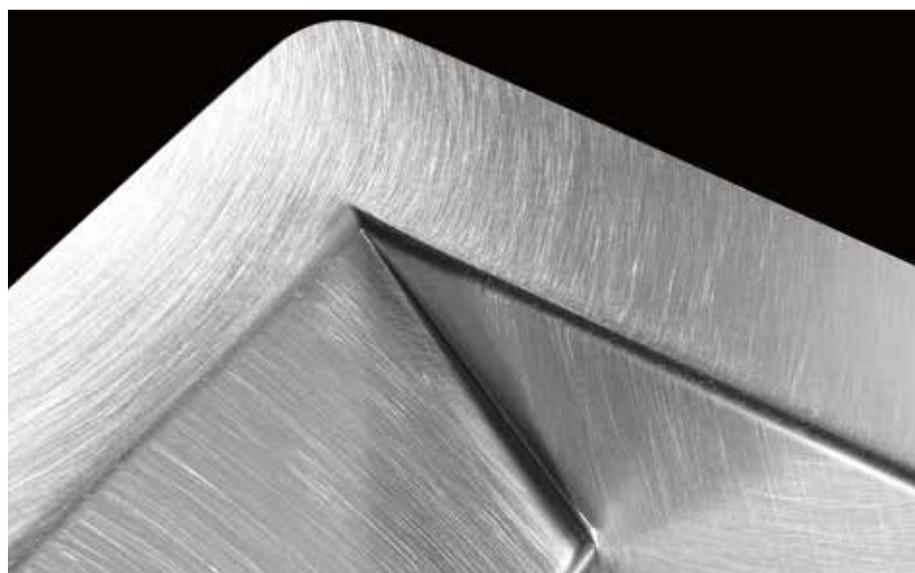

Beyond built-in... where and how you want.


The methods with which worktops can be built-in have become increasingly more varied and customized. Foster was the first sink manufacturer to have researched and used the new recessing methods and has thus acquired a great deal of experience. It now offers the most comprehensive range available on the market, with flush-mount, flat-edge and undermount installation.



Standard
Traditional built-in with the vertical, 8-mm edge.



Q4
The casing has a square edge that stands on the work surface by just 4 mm. Great solution to match the sink with the ceramic glass hobs (Induction).



Flat-edge
An original edge, with an inclined, 3 mm high profile, matching an extreme elegance with the easiness of installation.



Flush-mount
The product is sunk in 1,5 mm deep recess thus being perfectly flush with the worktop. As alternative, it can be installed on the worktop as well.




Undermount
A classy and contemporary idea, to be installed under the worktop; available in various types of sinks, with soft or square design.



Built-in
Almost the whole range of Foster sinks can be integrated into stainless steel worktops; it is the most elegant and professional solution, that creates a seamless work-surface.

Flush-mount & Flat-edge: a clarification to be done

Many manufacturers indicate as Flat-edge a Flush-mount edge mounted on the worktop.



For Foster Flat-edge means a real alternative built-in solution with an elegant 3 mm sloping edge.



In any case, Foster's Flush-mount models can be mounted on the worktop (FT), thus offering a further built-in solution (FTS).



Features



Sturdy sinks

For every type of sink (welded or single-moulded) and price bracket, Foster works with above-average steel thickness when compared to other manufacturers. As a result, also owing to our long experience, we are able to construct “sturdy” sinks displaying a unique design.



Spacious bowls

Thanks to the pioneering manufacturing technology used, all the bowls in Foster sinks provide a generous depth (even the single-moulded versions, i.e. formed from a single sheet of steel). The bowls in many of the versions are more than 20 cm deep, thus sizeable and practical for all washing operations.



Bowls with tight radius

Bowls with squared-out shapes, a modern design and more capacity. Foster proposes a wide range of choices with different manufacturing technologies and corners with different radiuses.



Mixer tap holes

On many Foster sinks the ample tap area is already provided with two tap holes. Many sinks can be customized with on-demand additional holes, to be requested on the order. These can be used for taps requiring two holes, for automatic waste fittings or for soap dispensers. This feature is marked on the drawings by means of a dotted outline.



Diamond-shaped bottom

The water drainage on the bowl's bottom is an important feature, always well cared for on Foster sinks. In the squared-out, flat-bottomed sinks, the draining is ensured by the elegant diamond-shaped creases that make the water flow easier.



Waste fittings

Foster sinks are equipped with a generously sized 3.5” waste fitting and practical strainer plug that prevents solids from flowing away with the waste water. The 3.5” drain allows the Foster waste-disposer, which is compatible with all models, to be used. (Compatibility with the waste-disposer of other manufacturers is not guaranteed).



Waste fitting with remote control

The waste fitting with remote control is part of the standard equipment supplied with some of the models. A very convenient accessory that saves you from wetting your hands when the bowl needs emptying (see page 148).



Perimetric overflow


The overflow safety, present on all Foster sinks, avoids any spillage of water in case the tap is inadvertently left open. The new perimetric solution available on some models improves the look thanks to its squared-out and essential shape.



Space-saver

A feature that optimizes the use of the under-sink space, which is more and more important due to recycling practices. This feature is standard on some models but always possible also on any other model by ordering specific waste fittings and siphons as accessories (see page 148).

How to read the catalogue (sinks chapter)

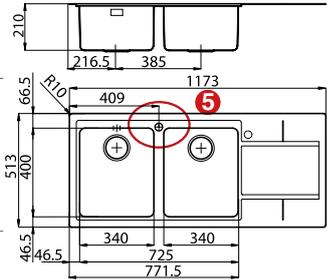	Features	Version	Ref.	Technical Drawing
<p>Cabinet 80 ²</p>  <p>Picture shows lh version</p>	<p>AISI 304 brushed dimensions: 1160x500 2 bowls: 340x400 cut-out: 1140x480 drain: 3½"</p> <p>AISI 304 brushed dimensions: 1173x513 2 bowls: 340x400 cut-out: flush-mount (FT): web site up-mount (FTS): 1160x500 drain: 3½"</p>	<p>Q4</p>	<p>³ 4312 051 (rh) 4312 052 (lh)</p>	<p>External dimensions refer to Flush-mount version</p> 
		<p>FT</p> <p>FTS</p>	<p>4315 051 rh 4315 052 lh</p>	
<p>Accessories ⁴</p> <p>L1 L4 N2 N3 O2 P1 P2 R T1 T2 Z2</p> <p>For Q4 version only: L5 M</p>				

¹ Types of installation

Many Foster sinks are available in a variety of versions (Standard, Flush-mount, Flat-edge and Undermount) that can have slightly different dimensions. Therefore we recommend to check the specifications besides every version. The built-in type to which figures are referred is always specified under the drawing.

³ Right-hand, left-hand and reversible sinks

The double code for a single model indicates that both right-hand and left-hand versions are available. The right-hand version (rh) refers to a sink with the bowl (or bigger bowl on models without drainer) on the right. Left-hand versions are identified by the code "lh". The single code indicates that the sink is reversible, or that only the version shown in the picture or drawing is available.

Accessories

<p>A</p>  <p>Chopping board 34x40 8647 000</p>	<p>G</p>  <p>Chopping board 40x40 8646 000</p>	<p>L4</p>  <p>Glass chopping board 23x41 cm 8631 300</p>
--	--	--

⁴ Accessories

Always striving to blend aesthetics and functionality, Foster devotes special attention to its products' Accessories. This catalogue places special emphasis on the optional features indicated below each model, to facilitate identification of the proper combinations.

² Cabinet



"Cabinet" refers to the smallest standard element of a modular kitchen in which a sink can be fitted in. In some cases you may find a double standard:

(B) for fitting in top at least 40 mm thick, consider the smaller measure, as indicated in parentheses (e.g. page 77);

(T) for fitting in the beginning/end of composition, consider the bigger measure, as indicated in parentheses.

For special fittings that require extra adaptations to the furniture, please refer to the kitchen manufacturer.

Please note: the listed cabinet sizes refer to the bowls' encumbrance and do not consider the fixing brackets, which can change in any given installation. Please also refer to the kitchen manufacturer's know-how for specific installations which may require some customization on the cabinets.

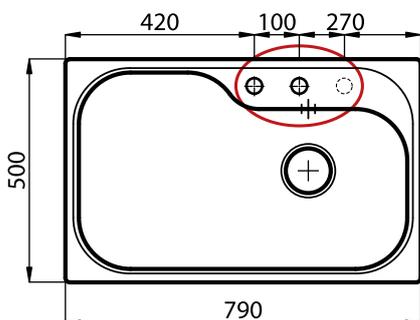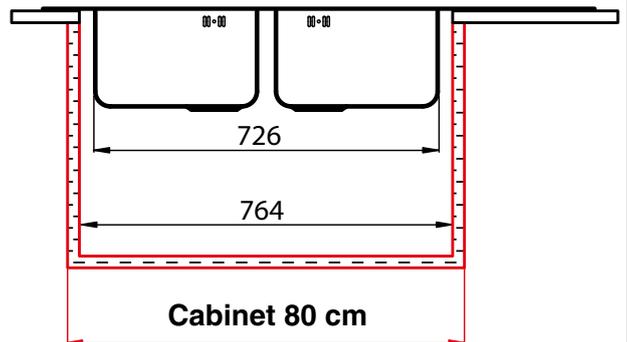

⁵ Mixer tap holes

In the drawings standard tap holes are shown with continuous line. Further possible holes on request, in order to install the automatic waste fitting and the dispenser, are shown with a dashed line. For some models, customization with additional holes can be done with some extra costs.

Foster Milano

AN INNOVATIVE CONCEPT OF FUNCTIONALITY



SPACE drain



Perimetric overflow



Space saver drain

Foster Milano



A large square bowl: all that space that is needed, both as sink and working area.



Thanks to the steps on the edge, the sink can be configured in many different ways.



These steps can accommodate many practical accessories.



The grating kit is a practical element that can be fit into its specific chopping board.



The handy plastic bowls complete the working set.



The stainless steel colander is functional and hygienic.



The ample workspace allows to arrange the accessories side by side.



Grids can be placed on the bottom too: more hygiene and protection for the bowl.



The sink can perform a disappearing act and become a seamless workspace.



Three steps system

The sink has an ingenious design that makes it simple to use a large set of optional accessories. On the topmost supporting step, the Black grids slide, creating a large surface to rinse food.



Complete range of accessories










The second step is meant to support and allow the sliding of a complete combination of accessories, which make some operations practical and safe: rinse, drain, slice, grate...




Protection grid on the bottom

Black grids can rest on the step on the bottom also, making it possible to rinse foodstuffs without their coming in contact with the bottom of the sink, which may be dirty.

Foster Milano

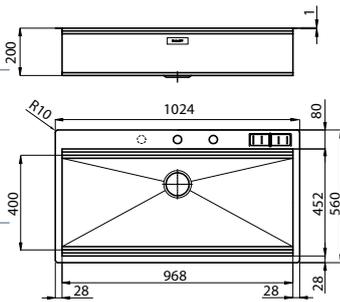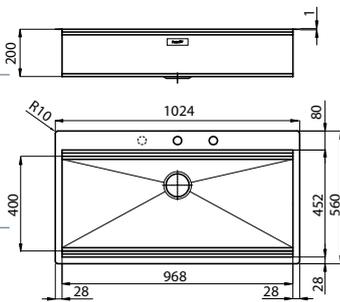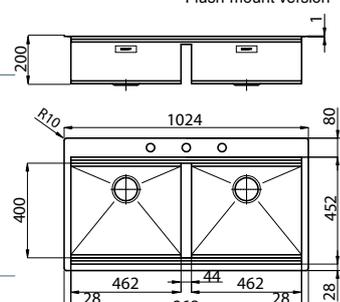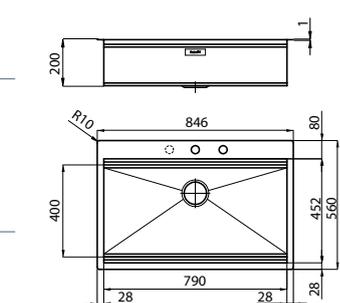	Features	Version	Ref.	Technical Drawing
	AISI 304 satin finish dimensions: 1024x560 1 bowl: 968x400 cut-out: 1004x540 drain: automatic Space Milano (PS) 3½"		1018 055	External dimensions refer to Flush-mount version 
	AISI 304 satin finish dimensions: 1024x560 1 bowl: 968x400 flush-mount (FT): web site up-mount FTS: 1004x540 drain: automatic Space Milano (PS) 3½"	 	1017 055	
Included: knives holder and PS Optional accessories: M6 P3 L4 N3 P2 T2 Z2	 Black grids configurations edge positioning	 Black grids configurations bottom positioning		Third tap hole available
	AISI 304 satin finish dimensions: 1024x560 1 bowl: 968x400 cut-out: 1004x540 drain: automatic Space Milano (PS) 3½"		1018 050	External dimensions refer to Flush-mount version 
	AISI 304 satin finish dimensions: 1024x560 1 bowl: 968x400 flush-mount (FT): web site up-mount FTS: 1004x540 drain: automatic Space Milano (PS) 3½"	 	1017 050	
Included: PS Optional accessories: M6 P3 L4 N3 O2 P2 T2 Z2	 Black grids configurations edge positioning	 Black grids configurations bottom positioning		Third tap hole available
	AISI 304 satin finish dimensions: 1024x560 2 bows: 462x400 cut-out: 1004x540 drain: 2 automatic Space Milano (PS) 3½"		1020 050	External dimensions refer to Flush-mount version 
	AISI 304 satin finish dimensions: 1024x560 2 bows: 462x400 flush-mount (FT): web site up-mount (FTS): 1004x540 drain: 2 automatic Space Milano (PS) 3½"	 	1019 050	
Included: PS Optional accessories: M6 P3 L4 N3 O2 P2 T2 Z2	 Black grids configurations edge positioning	 Black grids configurations bottom positioning		
	AISI 304 satin finish dimensions: 846x560 1 bowl: 790x400 cut-out: 826x540 drain: automatic Space Milano (PS) 3½"		1025 050	External dimensions refer to Flush-mount version 
	AISI 304 satin finish dimensions: 846x560 1 bowl: 790x400 flush-mount (FT): web site up-mount FTS: 826x540 drain: automatic Space Milano (PS) 3½"	 	1024 050	
Included: PS Optional accessories: M6 P3 L4 N3 O2 P2 T2 Z2	 Black grids configurations edge positioning	 Black grids configurations bottom positioning		Third tap hole available

Foster Milano

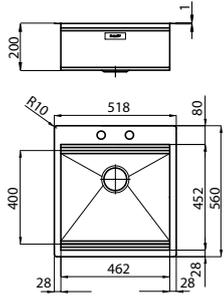	Features	Version	Ref.	Technical Drawing
Cabinet 60 	AISI 304 satin finish dimensions: 518x560 1 bowl: 462x400 cut-out: 498x540 drain: automatic Space Milano (PS) 3½"	 Q4	1012 050	External dimensions refer to Flush-mount version 
	AISI 304 satin finish dimensions: 518x560 1 bowl: 462x400 flush-mount (FT): web site up-mount FTS: 498x540 drain: automatic Space Milano (PS) 3½"	 FT  FTS	1011 050	

Included: **PS**

Optional accessories:

M6 P3 L4 N3 O2 P2 T2 Z2



Black grids
configurations
edge positioning



Black grids
configurations
bottom positioning

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

accessories

	<p>L4 Glass chopping board 23x41 cm 8631 300</p>		<p>M6 Nut wood chopping board 18x44,8 cm 8642 000</p>		<p>N3 HDPE Twin chopping board 31,7x42,5 cm 8644 101</p>
	<p>O2 White plastic bowl 27,2x41,4 cm 8153 100</p>		<p>P2 * Grating kit complete with ring support and food collection tray 8159 101</p>		<p>P3 Black grid 39,2x44,8 cm 8100 600</p>
	<p>T2 * St. steel dishes holder 21,4x37,9 cm 8100 303</p>		<p>Z2 * St. steel perforated pan 21,5x38 cm 8151 000</p>		<p>PS Milano Space automatic drain 8407 115</p>

*To use only with N3 chopping board

Milanello workstation

THE FUNCTIONALITY OF THE FOSTER MILANO SINK IN A SMALLER SPACE



Black grids supplied for full-bowl coverage (code 8100 602).


archiproducts[®]
DESIGN AWARDS
—
WINNER 2019



SPACE drain








Perimetric overflow



Space saver drain

Milanello workstation

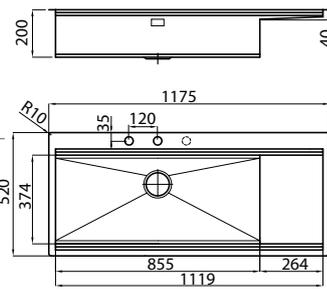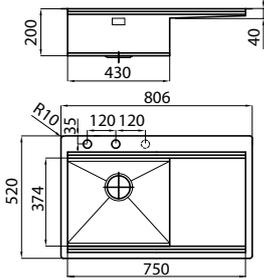	Features	Version	Ref.	Technical Drawing
Cabinet 120 	AISI 304 satin finish dimensions: 1175x520 1 bowl: 855x374 flush-mount (FT): web site up-mount FTS: 1158x503 drain: automatic Space Push (PP) 3½"	 FT	1043 051 rh	
		 FTS	1043 052 lh	
Included: 3 Black Milanello grids (8100 602)	 Black grids configurations edge positioning	 Black grids configurations bottom positioning		Third tap hole available
Optional accessories: Z3 T8 M7 L3 L4 N3 N2 P2 T T2 Z Z2				
Cabinet 80 	AISI 304 satin finish dimensions: 806x520 1 bowl: 430x374 flush-mount (FT): web site up-mount FTS: 789x503 drain: automatic Space Push (PP) 3½"	 FT	1040 051 rh	
		 FTS	1040 052 lh	
Included: 2 Black Milanello grids (8100 602)	 Black grids configurations edge positioning	 Black grids configurations bottom positioning		Third tap hole available
Optional accessories: Z3 T8 M7 L3 L4 N3 N2 P2 T T2 Z Z2				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.



The practicality of a large and spacious bowl and of an essential and elegant drainer that, above all, is easily cleanable and makes it easy to drain water.



The supplied grid lies on the bottom to prevent food from getting in contact with potential remains that may be present on the sink's surface.



Various modular and sliding accessories can be placed on the double guide rail. On the inner rail, a plate rack and a precious colander are housed.



The Black grid is located on the external rail. It is on the top of the sliding accessories and becomes a practical support and rinsing area.







An additional range of cutting boards and other accessories can be combined with the grids to complete your workstation.



The Black grids completely close the sink, turning it into a design object: the certainty of an always tidy kitchen.

Milanello workstation

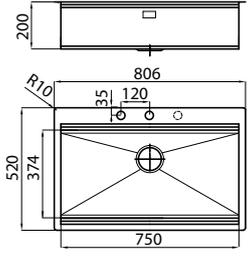	Features	Version	Ref.	Technical Drawing
Cabinet 80 	AISI 304 satin finish dimensions: 806x520 1 bowl: 750x374 flush-mount (FT): web site up-mount FTS: 789x503 drain: automatic Space Push (PP) 3½"	 FT  FTS	1034 050	
Included: 2 Black Milanello grids (8100 602)	 Black grids configurations edge positioning	 Black grids configurations bottom positioning		Third tap hole available
Optional accessories: Z3 T8 M7 L3 L4 N3 N2 P2 T T2 Z Z2				
Cabinet 60 	AISI 304 satin finish dimensions: 486x520 1 bowl: 430x374 flush-mount (FT): web site up-mount FTS: 469x503 drain: automatic Space Push (PP) 3½"	 FT  FTS	1031 050	
Included: 1 Black Milanello grid (8100 602)	 Black grids configurations edge positioning	 Black grids configurations bottom positioning		
Optional accessories: Z3 T8 M7 L3 L4 N3 N2 P2 T T2 Z Z2				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

accessories

sliding accessories under black grids



further accessories



*To use only with L3 chopping board **To use only with N3 chopping board

Milanello PVD workstation





SPACE drain



Perimetric overflow






Space saver drain

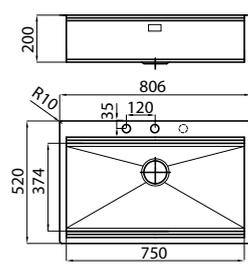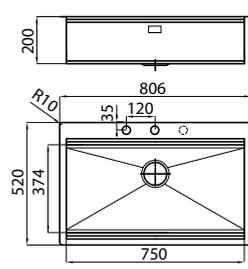	Features	Version	Ref.	Technical Drawing
<p>Cabinet 80</p>  <p>Included: 2 Black Milanello grids (8100 602)</p> <p>Optional accessories:            </p>	<p>AISI 304 Gun Metal dimensions: 806x520 1 bowl: 750x374 flush-mount (FT): web site up-mount FTS: 789x503 drain: automatic Space Push (PO) 3½"</p>	<p> FT  FTS</p>	<p>1034 056 1034 056</p>	 <p>Third tap hole available</p>
<p>Cabinet 80</p>  <p>Included: 2 Black Milanello grids (8100 602)</p> <p>Optional accessories:            </p>	<p>AISI 304 Copper dimensions: 806x520 1 bowl: 750x374 flush-mount (FT): web site up-mount FTS: 789x503 drain: automatic Space Push (PB) 3½"</p>	<p> FT  FTS</p>	<p>1034 058 1034 058</p>	 <p>Third tap hole available</p>

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Milanello PVD workstation

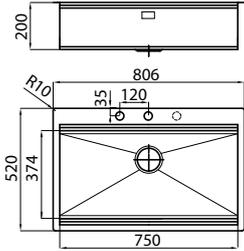	Features	Version	Ref.	Technical Drawing
Cabinet 80 	AISI 304 Gold dimensions: 806x520 1 bowl: 750x374 flush-mount (FT): web site up-mount FTS: 789x503 drain: automatic Space Push (PD) 3½"	 FT	1034 059	
		 FTS	1034 059	
Included: 2 Black Milanello grids (8100 602)		 Black grids configurations edge positioning	 Black grids configurations bottom positioning	Third tap hole available
Optional accessories: Z3 T8 M7 L3 L4 N3 N2 P2 T T2 Z Z2				

Included



2 Black Milanello grids

suggested mixer taps



Skin Gun Metal
(8424 856 - page 166)



Omega Gun Metal
(8497 856 - page 181)



Omega Copper
(8497 400 - page 182)



Omega Gold
(8497 700 - page 182)

accessories

sliding accessories under black grids



Z3
St. steel colander
21,5x40 cm
8156 000



T8
St. steel dishes holder
21,4x37,2 cm
8100 306

further accessories



L3
Twin chopping board
41x41 cm
8644 004



L4
Glass chopping board
23x41 cm
8631 300



M7
Walnut chopping board 15,8x42,4 cm
8642 003



N2
HDPE chopping board
27,2x42,5 cm
8657 001



N3
HDPE Twin chopping board 31,7x42,5 cm
8644 101



P2 **
Grating kit complete with ring support and food collection tray
8159 101



T *
St. steel dishes holder
25x35 cm
8100 154



T2 **
St. steel dishes holder 21,4x37,9 cm
8100 303



Z *
St. steel colander
25x36 cm
8154 000





Z2 **
St. steel perforated pan 21,5x38 cm
8151 000

*To use only with L3 chopping board **To use only with N3 chopping board

New Wave

SINUOUS ELEGANCE

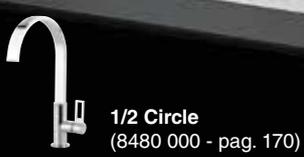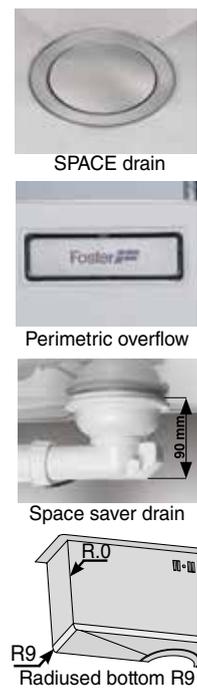

suggested mixer taps


	Features	Version	Ref.	Technical Drawing
--	----------	---------	------	-------------------

Cabinet 80



AISI 304 satin finish
 dimensions: **1160x520**
 2 bowls: **340x400**
 cut-out: flush-mount (FT): 1420 001 rh
 see pack up-mount (FTS): 1148x508 1420 002 lh
 drain: **automatic SPACE 3 1/2" PA**
 Perimetric overflow

available until exhaustion

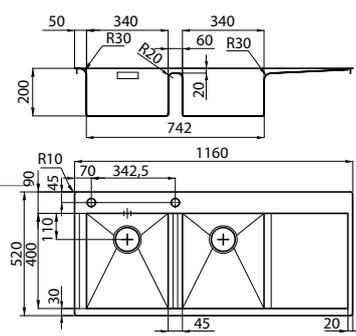

Picture shows lh version


Accessories: **L4 N2 N3 O2 P2 T1 T2 Z2**

Cabinet 80



AISI 304 satin finish
 dimensions: **1160x520**
 1 bowl: **710x400**
 cut-out: flush-mount (FT): 1416 001 rh
 see pack up-mount (FTS): 1148x508 1416 002 lh
 drain: **automatic SPACE 3 1/2" PA**
 Perimetric overflow
 Space inspectable
 siphon

available until exhaustion

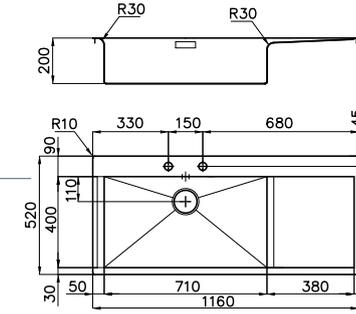

Picture shows lh version


Accessories: **L1 L3 L4 N2 N3 O2 P2 S T T1 T2 Z Z2**

Cabinet 60



AISI 304 satin finish
 dimensions: **1160x520**
 1 bowl: **500x400**
 cut-out: flush-mount (FT): 1418 000
 see pack up-mount (FTS): 1148x508
 drain: **automatic SPACE 3 1/2" PA**
 Perimetric overflow
 Space inspectable
 siphon


available until exhaustion

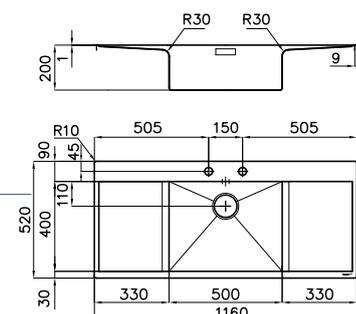

Accessories: **L3 L4 N2 N3 O2 P2 S T T1 T2 Z Z2**

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.


New Wave

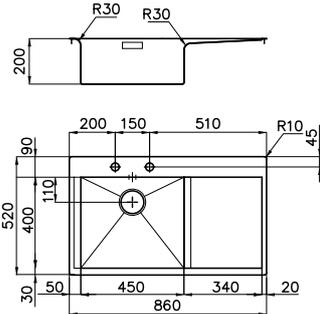	Features	Version	Ref.	Technical Drawing
Cabinet 60 	AISI 304 satin finish dimensions: 860x520 1 bowl: 450x400 cut-out: flush-mount (FT):  see pack up-mount (FTS): 848x508 drain: automatic SPACE 3½" PA Perimetric overflow Space inspectable siphon		1414 001 rh	
			1414 002 lh	

Picture shows lh version


Accessories:

- L1 L3 L4 N2 N3 O2 P2 S T T1 T2 Z Z2

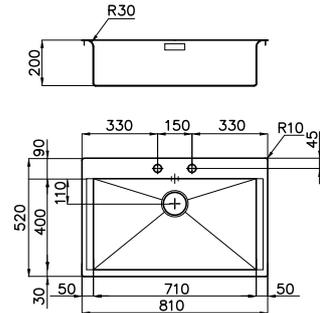Cabinet 80 	AISI 304 satin finish dimensions: 810x520 1 bowl: 710x400 cut-out: flush-mount (FT):  see pack up-mount (FTS): 798x508 drain: automatic SPACE 3½" PA Perimetric overflow Space inspectable siphon		1412 000	

Accessories:

- L1 L3 L4 N2 N3 O2 P2 S T T1 T2 Z Z2

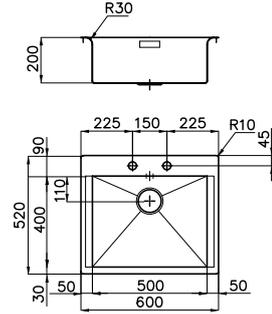Cabinet 60 	AISI 304 satin finish dimensions: 600x520 1 bowl: 500x400 cut-out: flush-mount (FT):  see pack up-mount (FTS): 588x508 drain: automatic SPACE 3½" PA Perimetric overflow Space inspectable siphon		1410 000	

Accessories:

- L1 L3 L4 N2 N3 O2 P2 S T T1 T2 Z Z2


Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.



Distinctive design
 The distinctive design of the New Wave drainer, with its refined and ample bend that facilitates the flow of water into the bowl.



Space waste-fitting
 The "Space" waste-fitting with steel cap gives elegance to the bowl and hides any residue collected in the underlying basket.

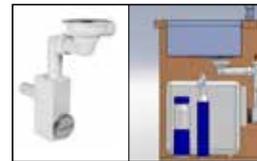

Siphon supplied
 The Space siphon supplied with the sink can be opened for inspection and leaves all the necessary space to install waste-sorting systems.

accessories

 <p>L3 Twin chopping board 41x41 cm 8644 004</p>	 <p>L4 Glass chopping board 23x41 cm 8631 300</p>	 <p>N2 HDPE chopping board 27,2x42,5 cm 8657 001</p>	 <p>N3 HDPE Twin chopping board 31,7x42,5 cm 8644 101</p>
 <p>O2 White plastic bowl 27,2x41,4 cm 8153 100</p>	 <p>P2 ** Grating kit complete with ring support and food collection tray 8159 101</p>	 <p>S St. steel basket 40x40 8612 000</p> <p>White basket 40x40 8612 100</p>	 <p>T * St. steel dishes holder 25x35 cm 8100 154</p>
 <p>T1 St. steel dishes holder 25x42,5 cm 8100 201</p>	 <p>T2 ** St. steel dishes holder 21,4x37,9 cm 8100 303</p>	 <p>Z * St. steel colander 25x36 cm 8154 000</p>	 <p>Z2 ** St. steel perforated pan 21,5x38 cm 8151 000</p>

*To use only with L3 chopping board **To use only with N3 chopping board

GK

ESSENTIAL YET REFINED





Vintage Finish




GK
(8488 000 - pag. 162)

suggested mixer taps

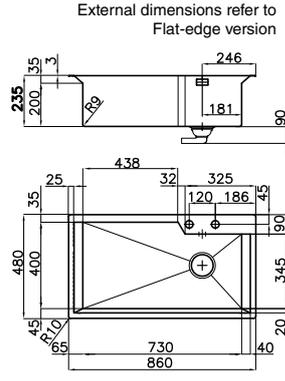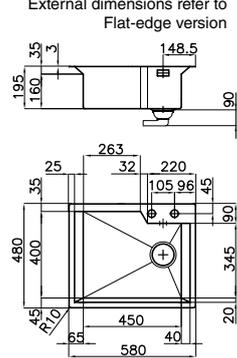	Features	Version	Ref.	Technical Drawing
Cabinet 90 	AISI 304 satin finish bowl depth: 235 mm dimensions: 860x480 cut-out: 847x467 drain: autom. SPACE 3½" PA	 SF	1402 100	External dimensions refer to Flat-edge version 
		 FT  FTS	1402 000	
		vintage version 	 FT  FTS	
available until exhaustion Included: PA Optional accessories: M4 N4 T2 P2 Z2				
Cabinet 60 	AISI 304 satin finish bowl depth: 195 mm dimensions: 580x480 cut-out: flush-mount (FT): web site up-mount (FTS): 567x467 drain: autom. SPACE 3½" PA	 FT  FTS	1403 000	External dimensions refer to Flat-edge version 
		available until exhaustion Included: PA Optional accessories: M4 N4 T2 P2 Z2		

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

GK

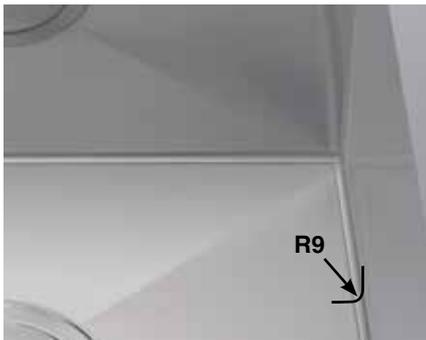


Different corners for better hygiene
The squared vertical corners match to the soft bottom hygienic ones. The diamond design on the bottom ensures the optimal water flow.



Remote control
In the flush-mount and flat-edge models, a remote control to open the drain without dipping hands into the bowl is also included.



Elegant SPACE drain
The elegant SPACE steel cap, included in all models, closes the drain and leaves no visible residues collected in the basket below.

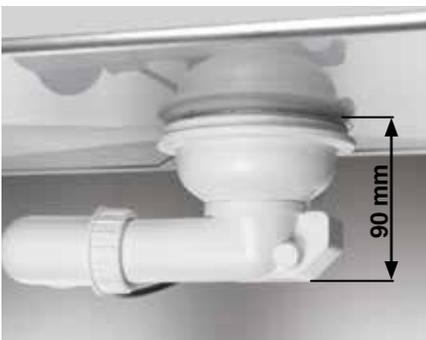

Space-saving drain and siphon
The GK sinks are equipped with space-saving drain and siphon allowing the optimal use of the under-sink space.



Perimetral Overflow
The attention to detail and the minimalist design can also be found in the original perimetric overflow that enhances the bowl.



Practical inclined containing area
The inclined containing area is the joining element between sink and hob, creating a classy combination, functional in use and cleaning.

An original set of accessories
For all the GK models a complete set of optional accessories is available. These fit perfectly in the spacious bowl and transform the sink in a complete and functional working area for the preparation and washing of food.



accessories

 <p>M4 Iroko chopping board 8656 001</p>	 <p>N4 HDPE Twin chopping board 8644 100</p>	 <p>T2 St. steel dishes holder 21,4x37,9 cm 8100 303</p>	 <p>P2 Grating kit complete with ring support and food collection bowl 8159 101</p>	 <p>Z2 St. steel perforated pan 8151 000</p>
--	--	--	---	--

S4001 - flush-mount sinks **NEW**

CAPACIOUS BOWLS, EMBELLISHED BY THE LARGE TAP COUNTER.




Play
(8487 000 - pag. 163)



Tre Alto
(8468 000 - pag. 172)

suggested mixer taps

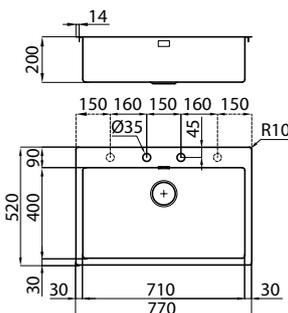
	Features	Version	Ref.	Technical Drawing
<p>Cabinet 80</p> 	<p>AISI 304 satin finish dimensions: 770x520 1 bowl: 710x400 cut-out: flush-mount (FT):  web site up-mount (FTS):  758x508 drain: autom. SPACE 3½" PA</p>		3366 050	

Optional accessories: **L3 L4 N2 N3 O2 P2 P4 S**
T T1 T2 Z Z2

Third and fourth tap hole available


Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

S4001 - flush-mount sinks

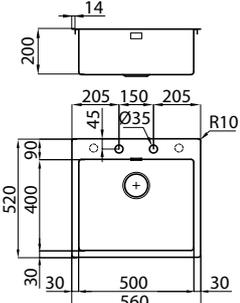	Features	Version	Ref.	Technical Drawing
Cabinet 60 	AISI 304 satin finish dimensions: 560x520 1 bowl: 500x400 cut-out: flush-mount (FT):  web site up-mount (FTS):  548x508 drain: autom. SPACE 3½" PA		3365 050	

Optional accessories: **L3 L4 N2 N3 O2 P2 P4 S**
T T1 T2 Z Z2

Third and fourth tap hole available

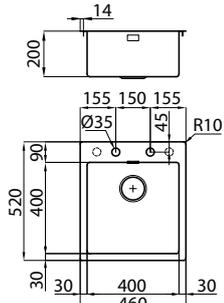Cabinet 45 	AISI 304 satin finish dimensions: 460x520 1 bowl: 400x400 cut-out: flush-mount (FT):  web site up-mount (FTS):  448x508 drain: autom. SPACE 3½" PA		3363 050	
---	--	--	----------	---

Optional accessories: **L3 L4 N2 N3 O2 P2 P4 S**
T T1 T2 Z Z2

Third and fourth tap hole available

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Accessories

 <p>L3 Twin chopping board 41x41 cm 8644 004</p>	 <p>L4 Glass chopping board 23x41 cm 8631 300</p>	 <p>N2 HDPE chopping board 27,2x42,5 cm 8657 001</p>	 <p>N3 HDPE Twin chopping board 31,7x42,5 cm 8644 101</p>	 <p>O2 White plastic bowl 27,2x41,4 cm 8153 100</p>	 <p>P2 ** Grating kit complete with ring support and food collection tray - 8159 101</p>
 <p>P4 Chopping board with stainless steel colander kit 8644 044</p>	 <p>R St. steel basket 34x40 8611 000</p>	 <p>S St. steel basket 40x40 8612 000 White basket 40x40 8612 100</p>	 <p>T * St. steel dishes holder 25x35 cm 8100 154</p>	 <p>T1 St. steel dishes holder 25x42,5 cm 8100 201</p>	 <p>T2 ** St. steel dishes holder 21,4x37,9 cm 8100 303</p>
 <p>Z * St. steel colander 25x36 cm 8154 000</p>	 <p>Z2 ** St. steel perforated pan 21,5x38 cm 8151 000</p>				

*To use only with L3 chopping board **To use only with N3 chopping board

S4001 - flush-mount bowls **NEW**

ESSENTIAL QUALITY



SPACE drain



Perimetric overflow



Space saver drain



Tre Alto
(8468 000 - pag. 172)



1/2 Circle
(8480 000 - pag. 170)

suggested mixer taps

	Features	Version	Ref.	Technical Drawing
--	----------	---------	------	-------------------

Cabinet 90




AISI 304 satin finish
dimensions: **840x440**
1 bowl: **800x400**
flush-mount (FT): web site*
up-mount (FTS): 820x430*
drain: SPACE 3½"



3358 050

* the built-in cut-out requires a notch to house the overflow (for worktop thicknesses > 30mm)

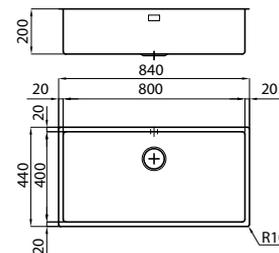

Optional accessories: **L3 L4 N2 N3 O2 P2 P4**

S T T1 T2 Z Z2
Autom. drain: **PA PE PM PL PP PS**
(see page 148-149)

Cabinet 80




AISI 304 satin finish
dimensions: **750x440**
1 bowl: **710x400**
flush-mount (FT): web site*
up-mount (FTS): 730x430*
drain: SPACE 3½"



3357 050

* the built-in cut-out requires a notch to house the overflow (for worktop thicknesses > 30mm)

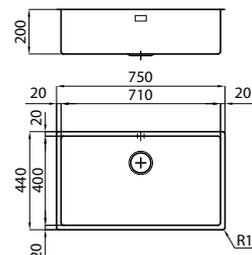

Optional accessories: **L3 L4 N2 N3 O2 P2 P4**

S T T1 T2 Z Z2
Autom. drain: **PA PE PM PL PP PS**
(see page 148-149)

Cabinet 80




AISI 304 satin finish
dimensions: **750x440**
2 bowls: **340x400**
flush-mount (FT): web site*
up-mount (FTS): 730x430*
drain: SPACE 3½"



3352 050

* the built-in cut-out requires a notch to house the overflow (for worktop thicknesses > 30mm)



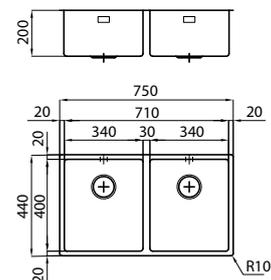


Optional accessories: **L4 N2 N3 O2 P2 P4 R T1 T2 Z2**

Autom. drain: **PA PE PM PL PP PS**
(see page 148-149)

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

S4001 - flush-mount bowls NEW

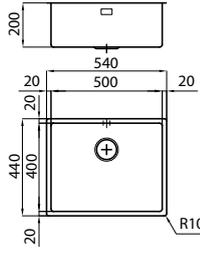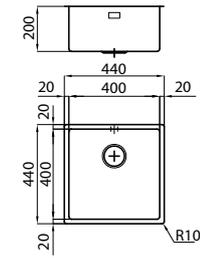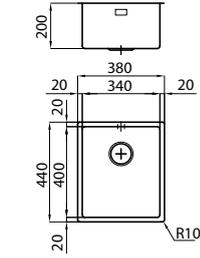Cabinet	Features	Version	Ref.	Technical Drawing
Cabinet 60 	AISI 304 satin finish dimensions: 540x440 1 bowl: 500x400 flush-mount (FT): web site* up-mount (FTS): 520x430* drain: SPACE 3½"	 	3355 050	
* the built-in cut-out requires a notch to house the overflow (for worktop thicknesses > 30mm)				
Optional accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Autom. drain: PA PE PM PL PP PS (see page 148-149)				
Cabinet 45 	AISI 304 satin finish dimensions: 440x440 1 bowl: 400x400 flush-mount (FT): web site* up-mount (FTS): 420x430* drain: SPACE 3½"	 	3356 050	
* the built-in cut-out requires a notch to house the overflow (for worktop thicknesses > 30mm)				
Optional accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Autom. drain: PA PE PM PL PP PS (see page 148-149)				
Cabinet 40 	AISI 304 satin finish dimensions: 380x440 1 bowl: 340x400 flush-mount (FT): web site* up-mount (FTS): 360x430* drain: SPACE 3½"	 	3353 050	
* the built-in cut-out requires a notch to house the overflow (for worktop thicknesses > 30mm)				
Optional accessories: L4 N2 N3 O2 P2 P4 R T1 T2 Z2 Autom. drain: PA PE PM PL PP PS (see page 148-149)				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Accessories

 L3 Twin chopping board 41x41 cm 8644 004	 L4 Glass chopping board 23x41 cm 8631 300	 N2 HDPE chopping board 27,2x42,5 cm 8657 001	 N3 HDPE Twin chopping board 31,7x42,5 cm 8644 101	 O2 White plastic bowl 27,2x41,4 cm 8153 100	 P2 ** Grating kit complete with ring support and food collection tray - 8159 101
 P4 Chopping board with stainless steel colander kit 8644 044	 R St. steel basket 34x40 8611 000	 S St. steel basket 40x40 8612 000 White basket 40x40 8612 100	 T * St. steel dishes holder 25x35 cm 8100 154	 T1 St. steel dishes holder 25x42,5 cm 8100 201	 T2 ** St. steel dishes holder 21,4x37,9 cm 8100 303
 Z * St. steel colander 25x36 cm 8154 000	 Z2 ** St. steel perforated pan 21,5x38 cm 8151 000				

*To use only with L3 chopping board **To use only with N3 chopping board


S4000

A DISTINCTIVE DESIGN



Perimetric overflow

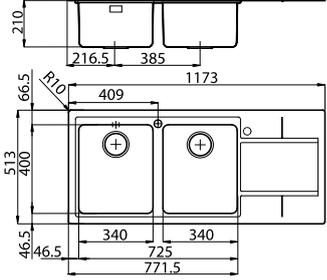



	Features	Version	Ref.	Technical Drawing
Cabinet 80	AISI 304 brushed dimensions: 1173x513 2 bowls: 340x400 cut-out: flush-mount (FT): web site up-mount (FTS): 1160x500 drain: 3½"	 FT  FTS	4315 051 rh 4315 052 lh	
<p>available until exhaustion</p>				
<p>Accessories:  L4  N2  N3  O2  P2  P4  R  T1  T2  Z2 </p>				

Picture shows lh version

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

S4000

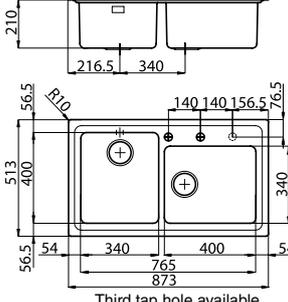	Features	Version	Ref.	Technical Drawing
Cabinet 90 	AISI 304 brushed dimensions: 873x513 2b: 340x400+400x340 cut-out: flush-mount (FT): web site up-mount (FTS): 860x500 automatic drain 3½" PM	 FT	4385 050	
		 FTS		
<p>available until exhaustion</p>				
<p>Accessories: L4 N2 N3 O2 P2 P4 R T1 T2 Z2</p>				

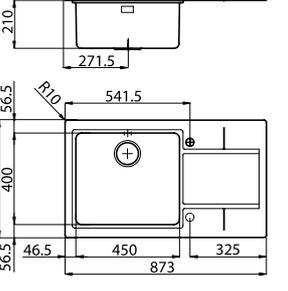Cabinet 60 	AISI 304 brushed dimensions: 873x513 1 bowl: 450x400 cut-out: flush-mount (FT): web site up-mount (FTS): 860x500 drain: 3½"	 FT	4386 051 rh	
		 FTS	4386 052 lh	
<p>available until exhaustion</p>				
<p>Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2</p>				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.


accessories

	L3 Twin chopping board 41x41 cm 8644 004		L4 Glass chopping board 23x41 cm 8631 300		L5 Glass chopping board 29x54 cm 8633 300		M Sliding chopping board 30x54 cm 8643 000
	N2 HDPE chopping board 27,2x42,5 cm 8657 001		N3 HDPE Twin chopping board 31,7x42,5 cm 8644 101		O2 White plastic bowl 27,2x41,4 cm 8153 100		P2 ** Grating kit complete with ring support and food collection tray 8159 101
	P4 Chopping board with stainless steel colander kit 8644 044		R St. steel basket 34x40 8611 000		S St. steel basket 40x40 8612 000 White basket 40x40 8612 100		T * St. steel dishes holder 25x35 cm 8100 154
	T1 St. steel dishes holder 25x42,5 cm 8100 201		T2 ** St. steel dishes holder 21,4x37,9 cm 8100 303		Z * St. steel colander 25x36 cm 8154 000		Z2 ** St. steel perforated pan 21,5x38 cm 8151 000


*To use only with L3 chopping board **To use only with N3 chopping board

Quadra

THE FORMAL PERFECTION

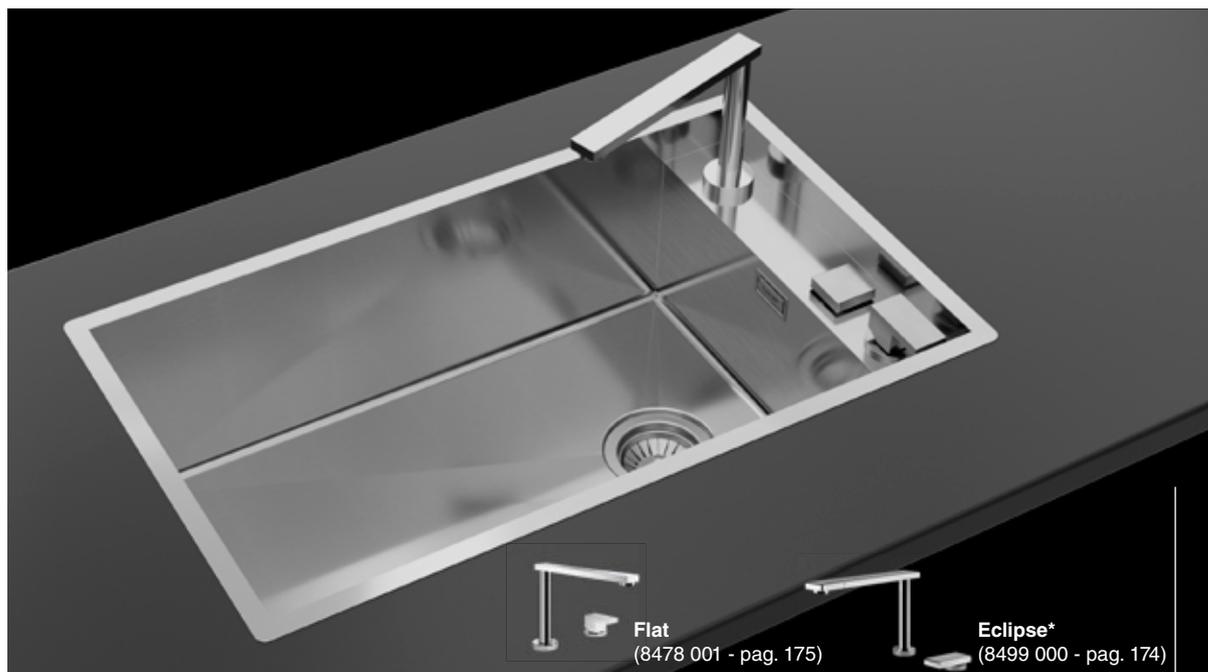

Perimetric overflow



Radiused bottom R9



Flat
(8478 001 - pag. 175)



Eclipse*
(8499 000 - pag. 174)

suggested mixer taps

*Eclipse mixer tap compatible by swapping the automatic waste-fitting with either PP or PL models.

	Features	Version	Ref.	Technical Drawing
--	----------	---------	------	-------------------

Cabinet 80


NEW



AISI 304 satin finish
dimensions: **750x440**
1 bowl: **630x400**
cut-out: flush-mount (FT):
web site
up-mount (FTS): 730x420
drain: **automatic 3½" PM**



1237 050

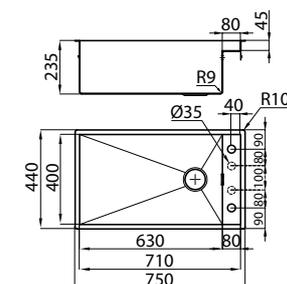

Third and fourth tape hole available

Accessories: **L3 L4 N2 N3 O2 P2 P4 S T T1**
T2 Z Z2 (see page 79)

Cabinet 60


NEW



AISI 304 satin finish
dimensions: **540x440**
1 bowl: **420x400**
cut-out: flush-mount (FT):
web site
up-mount (FTS): 520x420
drain: **automatic 3½" PM**




1235 050

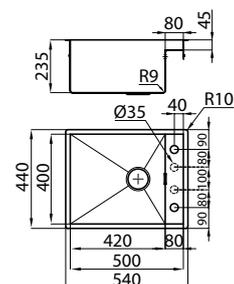

Third and fourth tape hole available

Accessories: **L3 L4 N2 N3 O2 P2 P4 S T T1**
T2 Z Z2 (see page 79)

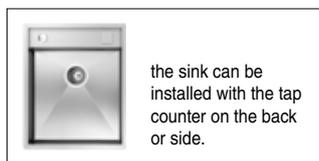

Cabinet 45


NEW



AISI 304 satin finish
dimensions: **440x440**
1 bowl: **320x400**
cut-out: flush-mount (FT):
web site
up-mount (FTS): 420x420
drain: **automatic 3½" PM**




1236 050

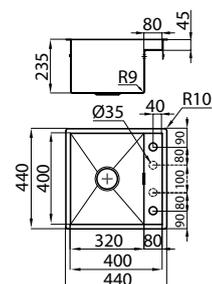

Third and fourth tape hole available

Accessories: **L3 L4 N2 N3 O2 P2 P4 S T T1**
T2 Z Z2 (see page 79)

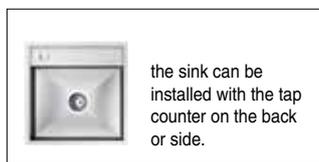





Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Quadra

	Features	Version	Ref.	Technical Drawing
<p>Cabinet (60)⁹/120 (ref. page 55)</p> 	<p>AISI 304 satin finish dimensions: 1064x464  1 bowl: 470x400 cut-out: flush-mount (FT):  web site  up-mount (FTS): 1047x447  drain: 3½"</p>		1210 050	
<p>available until exhaustion</p>				
<p>Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (see page 79) Automatic waste fitting: PA PE PM PL PP PS (p. 148)</p>				
<p>Cabinet (80)⁹/120 (ref. page 55)</p> 	<p>AISI 304 satin finish dimensions: 1000x440  1 bowl: 675x400 cut-out: flush-mount (FT):  (FT): web site  up-mount (FTS): 987x427  drain: 3½"</p>		1220 050	
<p>Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (see page 79) Automatic waste fitting: PA PE PM PL PP PS (p. 148)</p>				
<p>Cabinet (80)⁹/120 (ref. page 55)</p> 	<p>AISI 304 satin finish dimensions: 1160x502  2 bowls: 340x400 cut-out: flush-mount (FT):  web site  up-mount (FTS): 1143x485  drain: automatic 3½" PM</p>		1228 051 rh 1228 052 lh	
<p>available until exhaustion</p>				
<p>Picture shows lh version</p>				
<p>Accessories: (see page 79) L4 N2 N3 O2 P2 P4 R T1 T2 Z2</p>				
<p>Cabinet 90</p> 	<p>AISI 304 satin finish dimensions: 864x464  1 bowl: 800x400 cut-out: flush-mount (FT):  (FT): web site  up-mount (FTS): 847x447  drain: 3½"</p>		1218 050	
<p>Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (see page 79) Automatic waste fitting: PA PE PM PL PP PS (p. 148)</p>				
<p>Cabinet 90</p> 	<p>AISI 304 satin finish dimensions: 840x510  1 bowl: 761x400 cut-out: 820x495 drain: automatic 3½" PM</p>		1219 050	<p>External dimensions refer to Flat-edge version</p>
<p>AISI 304 satin finish dimensions: 825x503  1 bowl: 761x400 cut-out: flush-mount (FT):  web site  up-mount (FTS): 808x486  drain: automatic 3½" PM</p>				
1229 050				
<p>Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (see page 79)</p>				
<p>Third and fourth tape hole available</p>				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Quadra

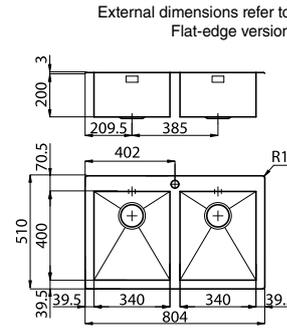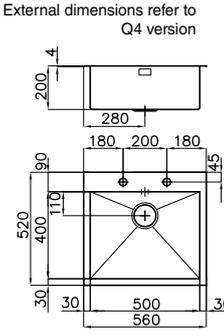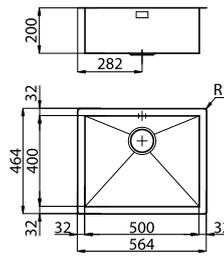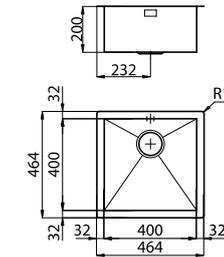	Features	Version	Ref.	Technical Drawing
Cabinet 80 	AISI 304 satin finish dimensions: 804x510 2 bowls: 340x400 cut-out: 784x495 drain: 3½"	 SF	1209 050	External dimensions refer to Flat-edge version 
	AISI 304 satin finish dimensions: 789x503 2 bowls: 340x400 cut-out: flush-mount (FT): web site up-mount (FTS): 772x486 drain: 3½"	 FT  FTS	1208 050	
available until exhaustion Accessories: (see page 79) L4 N2 N3 O2 P2 P4 R T1 T2 Z2				
Cabinet 60 	AISI 304 satin finish dimensions: 560x520 1 bowl: 500x400 cut-out: 540x500 automatic drain 3½" PM	 Q4	1243 050	External dimensions refer to Q4 version 
	AISI 304 satin finish dimensions: 579x510 1 bowl: 500x400 cut-out: 559x495 automatic drain 3½" PM	 SF	1216 050	
available until exhaustion Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (see page 79)				
Cabinet 60 	AISI 304 satin finish dimensions: 564x464 1 bowl: 500x400 cut-out: flush-mount (FT): web site up-mount (FTS): 547x447 drain: 3½"	 FT  FTS	1215 050	
	AISI 304 satin finish dimensions: 479x510 1 bowl: 400x400 cut-out: 459x495 automatic drain 3½" PM	 SF	1205 050	
available until exhaustion Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (see page 79) Automatic waste fitting: PA PE PM PL PP PS (p. 148)				
Cabinet 45 	AISI 304 satin finish dimensions: 464x464 1 bowl: 400x400 cut-out: flush-mount (FT): web site up-mount (FTS): 447x447 drain: 3½"	 FT  FTS	1214 050	
	AISI 304 satin finish dimensions: 479x510 1 bowl: 400x400 cut-out: 459x495 automatic drain 3½" PM	 SF	1205 050	
available until exhaustion Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (see page 79) Automatic waste fitting: PA PE PM PL PP PS (p. 148)				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Quadra

	Features	Version	Ref.			Technical Drawing
--	----------	---------	------	--	--	-------------------


Cabinet 40



AISI 304 satin finish
 dimensions: **400x520**
 1 bowl: **340x400**
 cut-out: 380x500
 drain: **automatic 3½" PM**



1241 050

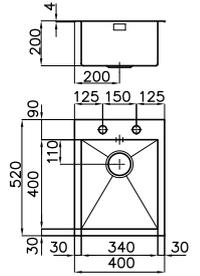

available until exhaustion

Accessories: **L4 N2 N3 O2 P2 P4 T1 T2 Z2**


Cabinet 90



AISI 304 satin finish
 dimensions: **864x464**
 1 bowl: **800x400**
 cut-out: flush-mount (FT):
 web site
 up-mount (FTS): 847x447
 drain: 7"




1218 097

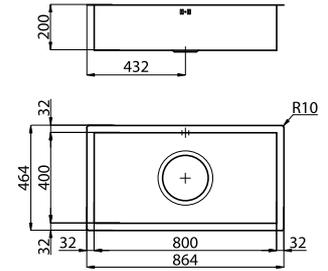

available until exhaustion

Accessories: **L3 L4 N2 O2 S T T1 Z**

Available also in undermount version, see page 123

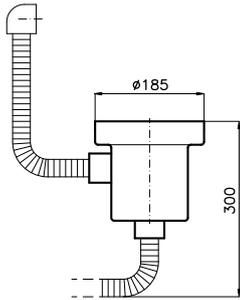

Extralarge waste fitting

The 7" waste fitting features a bigger dimension than standard ones. The drain offers a large and deep basket for food waste collection.



Standard fittings: fixing brackets, gasket (not available for under-mount sinks), 7" waste fitting/siphon, overflow. Packing: single carton box.

accessories

 <p>L3 Twin chopping board 41x41 cm 8644 004</p>	 <p>L4 Glass chopping board 23x41 cm 8631 300</p>	 <p>M Sliding chopping board 30x54 8643 000</p>	
 <p>N2 HDPE chopping board 27,2x42,5 cm 8657 001</p>	 <p>N3 HDPE Twin chopping board 31,7x42,5 cm 8644 101</p>	 <p>O2 White plastic bowl 27,2x41,4 cm 8153 100</p>	 <p>P2 ** Grating kit complete with ring support and food collection tray 8159 101</p>
 <p>P4 Chopping board with stainless steel colander kit 8644 044</p>	 <p>R St. steel basket 34x40 8611 000</p>	 <p>S St. steel basket 40x40 8612 000</p>	 <p>T * St. steel dishes holder 25x35 cm 8100 154</p>
 <p>T1 St. steel dishes holder 25x42,5 cm 8100 201</p>	 <p>T2 ** St. steel dishes holder 21,4x37,9 cm 8100 303</p>	 <p>Z * St. steel colander 25x36 cm 8154 000</p>	 <p>Z2 ** St. steel perforated pan 21,5x38 cm 8151 000</p>

*To use only with L3 chopping board **To use only with N3 chopping board

Fortyfour **NEW**

ELEGANCE AND PRACTICALITY FOR SMALL SPACES



Perimetric overflow



Tre Alto
(8468 000 - pag. 172)



Master
(8493 000 - pag. 172)

suggested mixer taps

	Features	Version	Ref.	Technical Drawing
--	----------	---------	------	-------------------


Cabinet 45



AISI 304 satin finish
dimensions: **440x500**
1 bowl: **365x350**
cut-out: 420x480
drain: 3½"



4151 050

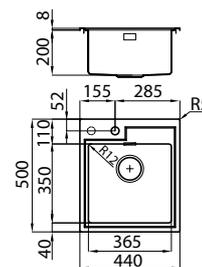

Accessories: **B6** **T6**

Automatic waste fitting: **PA** **PE** **PM** **PL** **PP** **PS** (p. 148)

Second tap hole available

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

A Perfect match

Fortyfour is designed for small spaces that require aesthetics and functionality. It provides all the freedom of combination: Fortyfour is perfectly coordinated with both the Veronika 3-burner hob and the S1000 3-zone induction hob.



Veronika 3F
cod.e 7063 052
page 243



S1000 3 zones
code 7373 300
page 207

accessories



B6
Chopping board
26x36,6 cm
8643 117




T6
St. steel dishes
holder 23x37,5
8100 305

CQ

DESIGN GOES AROUND



suggested mixer taps

	Features	Version	Ref.	Technical Drawing
Cabinet 60 	AISI 304 satin finish dimensions: Ø 520 1 bowl: Ø 445 cut-out: flush-mount (FT): web site up-mount (FTS): Ø 500 drain: SPACE 3½"	FT FTS	1222 000	
available until exhaustion				

Accessories: **T7** **P6**

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Unconventional accessoires

The CQ sink is complimented by an original set of accessories. The compact kit with chopping board, steel grid and colander makes any work much easier.



Accessories



Master

PURE FUNCTIONAL ELEGANCE



Perimetric overflow



Master
(8493 000 - pag. 172)



Play
(8487 000 - pag. 163)

suggested mixer taps


	Features	Version	Ref.	Technical Drawing
--	----------	---------	------	-------------------

Cabinet 80



Picture shows lh version

AISI 304 brushed
 dimensions: **1160x520**
 2 bowls: **340x400**
 cut-out: flush-mount (FT):  **1252 051 rh**
 web site
 up-mount (FTS):  **1252 052 lh**
 up-mount (FTS): 1147x507
 drain: **automatic 3½" PM**

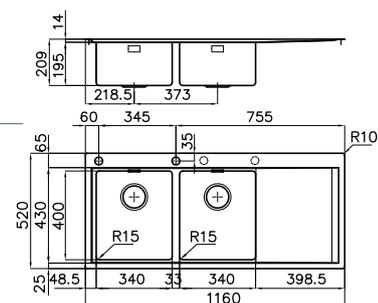

Third and fourth tape hole available

Accessories: (see page 79)


L4 N2 N3 O2 P2 P4 R T1 T2 Z2

Cabinet 60



Picture shows lh version

AISI 304 brushed
 dimensions: **1000x520**
 2 b.: **340x400 + 180x400**
 cut-out: flush-mount (FT):  **1251 051 rh**
 web site
 up-mount (FTS):  **1251 052 lh**
 up-mount (FTS): 987x507
 drain: **automatic 3½" PM**

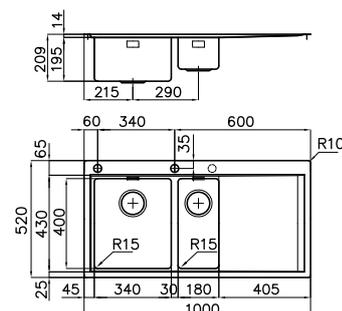

Third tape hole available

Accessories: **L4 N2 N3 O2 P2 P4 R T1 T2 Z2**


(see page 79)

Cabinet 60



Picture shows lh version

AISI 304 brushed
 dimensions: **860x520**
 1 bowl: **450x400**
 cut-out: flush-mount (FT):  **1250 051 rh**
 web site
 up-mount (FTS):  **1250 052 lh**
 up-mount (FTS): 847x507
 drain: **automatic 3½" PM**

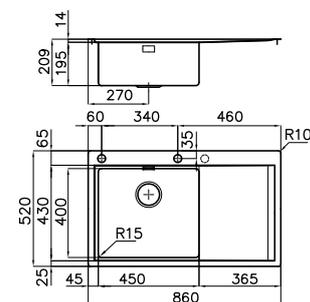

Third tape hole available


Accessories: **L3 L4 N2 N3 O2 P2 P4 S T T1**

T2 Z Z2 (see page 79)


Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

FL

A MULTIFUNCTIONAL SINGLE BOWL

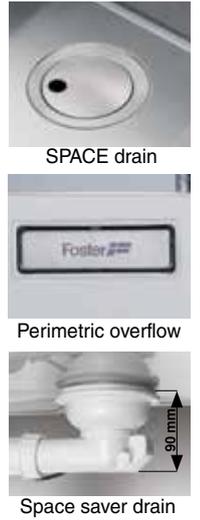

suggested mixer taps

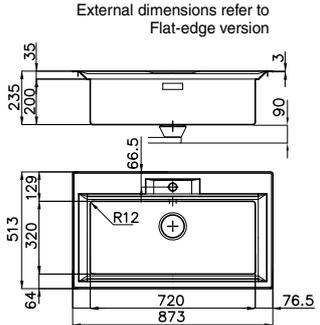	Features	Version	Ref.	Technical Drawing
Cabinet 80 	AISI 304 brushed dimensions: 860x500 bowl: 720x320 cut-out: 840x480 drain: 3½"	 STD	2975 060	External dimensions refer to Flat-edge version 
	AISI 304 brushed dimensions: 873x513 bowl: 720x320 cut-out: 840x480 drain: 3½"	 SF	2976 060 available until exhaustion	
	AISI 304 brushed dimensions: 873x513 bowl: 720x320 flush-mount (FT): web site up-mount (FTS): 860x500 drain: 3½"	 FT  FTS	2977 060	
Accessories: M5 T5				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

accessories


Stackable accessories



M5
Sliding iroko
chopping board
33,2x38,4 cm
8659 113



T5
St. steel dishes
holder
21,4x33,1 cm
8100 304

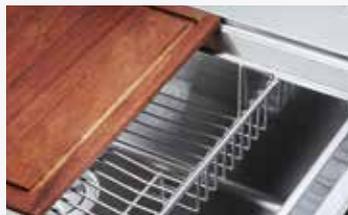

The characteristic shape of the bowl creates two lanes on which slide independently the cutting board and the drip grid. A flexible, complete and compact working set.



KE

QUALITY OF FORM AND SUBSTANCE



Perimetric overflow






Tre Alto
(8468 000 - pag. 172)







KE
(8492 000 - pag. 176)

suggested mixer taps

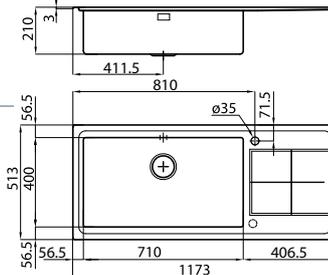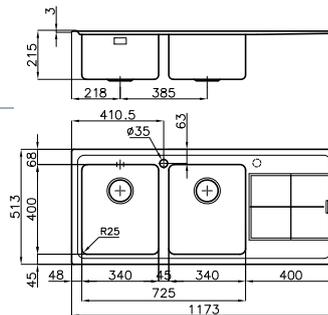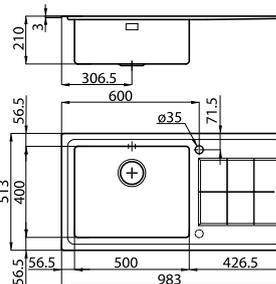	Features	Version	Ref.	Technical Drawing
<p>Cabinet 90</p>  <p>Picture shows lh version</p> <p>Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (page 87) Automatic waste fitting: PA PE PM PL PP PS (p. 148)</p>	<p>AISI 304 brushed dimensions: 1173x513 1 bowl: 710x400 cut-out: 1140x480 drain: 3½"</p>		<p>2211 051 rh 2211 052 lh</p>	 <p>Second tap hole available</p>
<p>Cabinet 90</p>  <p>Picture shows lh version</p> <p>Accessories: (page 87) L4 N2 N3 O2 P2 P4 R T1 T2 Z2 Automatic waste fitting: PA PE PM PL PP PS (p. 148)</p>	<p>AISI 304 brushed dimensions: 1173x513 2 bowls: 340x400 cut-out: 1140x480 drain: 3½"</p>		<p>2222 051 rh 2222 052 lh</p>	 <p>Second tap hole available</p>
<p>Cabinet 80</p>  <p>Picture shows lh version</p> <p>Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (page 87) Automatic waste fitting: PA PE PM PL PP PS (p. 148)</p>	<p>AISI 304 brushed dimensions: 983x513 1 bowl: 500x400 cut-out: 950x480 drain: 3½"</p>		<p>2263 051 rh 2263 052 lh</p>	 <p>Second tap hole available</p>

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

KE

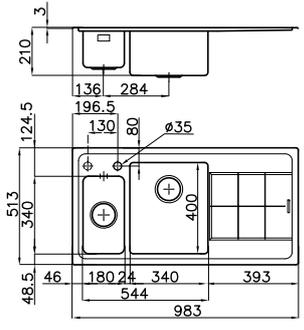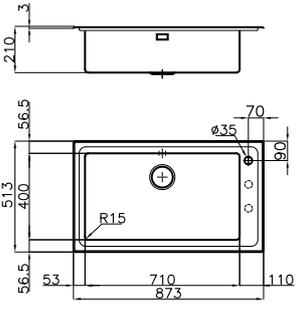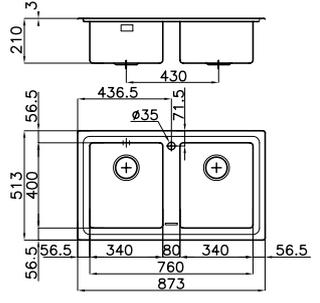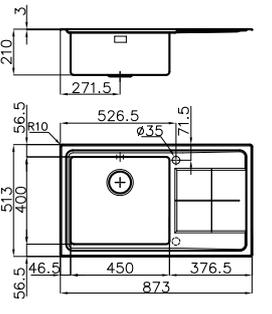	Features	Version	Ref.	Technical Drawing
<p>Cabinet 60(80)^T (ref. page 55)</p>  <p>Picture shows lh version</p> <p>Accessories: (page 87) L4 N2 N3 O2 P2 P4 R T1 T2 Z2 Automatic waste fitting: PA PE PM PL PP PS (p. 148)</p>	<p>AISI 304 brushed dimensions: 983x513 2b: 180x340+340x400 cut-out: 950x480 drain: 3/2"</p>		<p>2297 051 rh 2297 052 lh</p>	 <p>Second tap hole available</p>
<p>Cabinet 80</p>  <p>Accessories: (page 87) L4 N2 N3 O2 P2 P4 S T1 T2 Z2 Automatic waste fitting: PA PE PM PL PP PS (p. 148)</p>	<p>AISI 304 brushed dimensions: 873x513 1 bowl: 710x400 cut-out: 840x480 drain: 3/2"</p>		<p>2287 050</p>	 <p>Second and third tap hole available</p>
<p>Cabinet 80(90)^T (ref. page 55)</p>  <p>Accessories: (page 87) L4 N2 N3 O2 P2 P4 R T1 T2 Z2</p>	<p>AISI 304 brushed dimensions: 873x513 2b: 340x400 cut-out: 840x480 drain: 3/2"</p>		<p>2283 050</p>	
<p>Cabinet 60</p>  <p>Picture shows lh version</p> <p>Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (page 87) Automatic waste fitting: PA PE PM PL PP PS (p. 148)</p>	<p>AISI 304 brushed dimensions: 873x513 1 bowl: 450x400 cut-out: 840x480 drain: 3/2"</p>		<p>2280 051 rh 2280 052 lh</p>	 <p>Second tap hole available</p>

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.



In the picture, the perfect combination of KE sink and hob.



KE Q4 and flush-mount





KE
(8492 000 - pag. 176)

Bert
(8428 100 - pag. 171)

suggested mixer taps

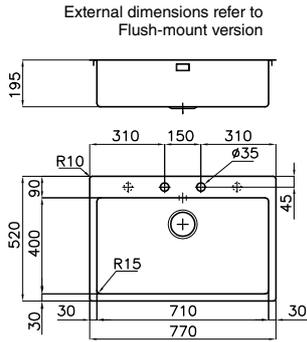
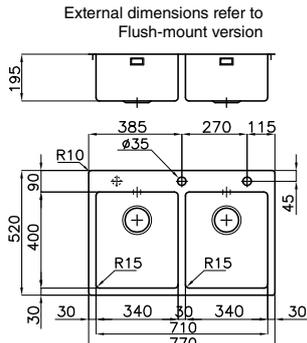
	Features	Version	Ref.	Technical Drawing
Cabinet 80 	AISI 304 brushed dimensions: 770x520 1 bowl: 710x400 cut-out: 750x500 drain: automatic 3½" PM	 Q4	2278 050	External dimensions refer to Flush-mount version 
		 FT  FTS	2266 050	
		Vintage version  FT  FTS	2266 080	
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (page 87)				Third and fourth tap hole available
Cabinet 80 	AISI 304 brushed dimensions: 770x520 2 bowls: 340x400 cut-out: 750x500 drain: automatic 3½" PM	 Q4	2279 050	External dimensions refer to Flush-mount version 
		 FT  FTS	2269 050	
		Vintage version  FT  FTS	2269 080	
Accessories: N2 N3 O2 P2 P4 R T1 T2 Z2 (page 87)				Third tap hole available

KE Q4 and flush-mount

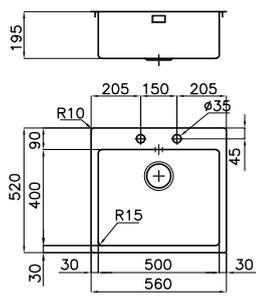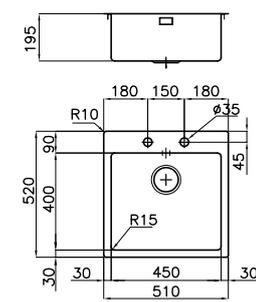	Features	Version	Ref.	Technical Drawing	
Cabinet 60 	AISI 304 brushed dimensions: 560x520 1 bowl: 500x400 cut-out: 540x500 drain: automatic 3½" PM	 Q4	2272 050	External dimensions refer to Flush-mount version 	
	AISI 304 brushed dimensions: 560x520 1 bowl: 500x400 flush-mount (FT): web site up-mount (FTS): 548x508 drain: automatic 3½" PM	 FT  FTS			2265 050
	Vintage version  	 FT  FTS			2265 080
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2					
Cabinet 60 	AISI 304 brushed dimensions: 510x520 1 bowl: 450x400 cut-out: 490x500 drain: automatic 3½" PM	 Q4	2274 050	External dimensions refer to Flush-mount version 	
	AISI 304 brushed dimensions: 510x520 1 bowl: 450x400 flush-mount (FT): web site up-mount (FTS): 498x508 drain: automatic 3½" PM	 FT  FTS			2264 050
	Vintage version  	 FT  FTS			2264 080
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2					


Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

accessories

 L3 Twin chopping board 41x41 cm 8644 004	 L4 Glass chopping board 23x41 cm 8631 300	 M Sliding chopping board 30x54 8643 000	
 N2 HDPE chopping board 27,2x42,5 cm 8657 001	 N3 HDPE Twin chopping board 31,7x42,5 cm 8644 101	 O2 White plastic bowl 27,2x41,4 cm 8153 100	 P2 ** Grating kit complete with ring support and food collection tray 8159 101
 P4 Chopping board with stainless steel colander kit 8644 044	 R St. steel basket 34x40 8611 000	 S St. steel basket 40x40 8612 000 White basket 40x40 8612 100	 T * St. steel dishes holder 25x35 cm 8100 154
 T1 St. steel dishes holder 25x42,5 cm 8100 201	 T2 ** St. steel dishes holder 21,4x37,9 cm 8100 303	 Z * St. steel colander 25x36 cm 8154 000	 Z2 ** St. steel perforated pan 21,5x38 cm 8151 000


*To use only with L3 chopping board **To use only with N3 chopping board

KE flush-mount Bowls

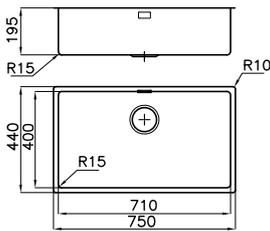	Features	Version	Ref.	Technical Drawing
Cabinet 80 	AISI 304 brushed dimensions: 750x440 1 bowl: 710x400 flush-mount (FT): web site* up-mount (FTS): 730x420* drain: 3½"	 FT	2157 050	
		 FTS		
Vintage version 	 FT	2157 080		
	 FTS			



* The cut-out needs a recess for housing the over-flow

Accessories: **L3 L4 N2 N3 O2 P2 P4 S T T1**
T2 Z Z2 (page 87)
 Automatic waste fitting: **PA PE PM PL PP PS** (p. 148)

Cabinet 60 	AISI 304 brushed dimensions: 540x440 1 bowl: 500x400 flush-mount (FT): web site* up-mount (FTS): 520x420* drain: 3½"	 FT	2155 050	
		 FTS		
Vintage version 	 FT	2155 080		
	 FTS			


* The cut-out needs a recess for housing the over-flow

Accessories: **L3 L4 N2 N3 O2 P2 P4 S T T1**
T2 Z Z2 (page 87)
 Automatic waste fitting: **PA PE PM PL PP PS** (p. 148)

Cabinet 60 	AISI 304 brushed dimensions: 490x440 1 bowl: 450x400 flush-mount (FT): web site* up-mount (FTS): 470x420* drain: 3½"	 FT	2154 050	
		 FTS		
Vintage version 	 FT	2154 080		
	 FTS			

* The cut-out needs a recess for housing the over-flow






Accessories: **L3 L4 N2 N3 O2 P2 P4 S T T1**
T2 Z Z2 (page 87)
 Automatic waste fitting: **PA PE PM PL PP PS** (p. 148)

Cabinet 45 	AISI 304 brushed dimensions: 440x440 1 bowl: 400x400 flush-mount (FT): web site* up-mount (FTS): 420x420* drain: 3½"	 FT	2156 050	
		 FTS		
Vintage version 	 FT	2156 080		
	 FTS			

* The cut-out needs a recess for housing the over-flow

Accessories: **L3 L4 N2 N3 O2 P2 P4 S T T1**
T2 Z Z2 (page 87)
 Automatic waste fitting: **PA PE PM PL PP PS** (p. 148)

Gun Metal KE flush-mount Bowls

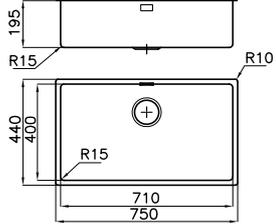	Features	Version	Ref.	Technical Drawing
Cabinet 80 	AISI 304 Gun Metal dimensions: 750x440 1 bowl: 710x400 flush-mount (FT): web site* up-mount (FTS): 730x420* drain: 3½"	 FT	2157 056	
		 FTS		
Vintage version 	 FT	2157 086		
 FTS				
* The cut-out needs a recess for housing the over-flow				
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (page 87) Automatic waste fitting: PG (page 149)				
Cabinet 60 	AISI 304 Gun Metal dimensions: 540x440 1 bowl: 500x400 flush-mount (FT): web site* up-mount (FTS): 520x420* drain: 3½"	 FT	2155 056	
		 FTS		
Vintage version 	 FT	2155 086		
 FTS				
* The cut-out needs a recess for housing the over-flow				
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (page 87) Automatic waste fitting: PG (page 149)				
Cabinet 60 	AISI 304 Gun Metal dimensions: 490x440 1 bowl: 450x400 flush-mount (FT): web site* up-mount (FTS): 470x420* drain: 3½"	 FT	2154 056	
		 FTS		
Vintage version 	 FT	2154 086		
 FTS				
* The cut-out needs a recess for housing the over-flow				
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (page 87) Automatic waste fitting: PG (page 149)				
Cabinet 45 	AISI 304 Gun Metal dimensions: 440x440 1 bowl: 400x400 flush-mount (FT): web site* up-mount (FTS): 420x420* drain: 3½"	 FT	2156 056	
		 FTS		
Vintage version 	 FT	2156 086		
 FTS				
* The cut-out needs a recess for housing the over-flow				
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 (page 87) Automatic waste fitting: PG (page 149)				

Stripe

A "PINSTRIPE" SINK. PURE ELEGANCE, BUT ALSO GREAT FUNCTIONALITY



Perimetric overflow





NYC
(8486 000 - pag. 170)






Milanello
(8425 100 - pag. 164)

suggested mixer taps

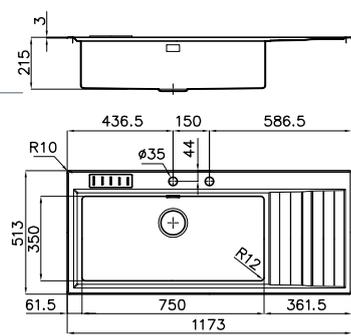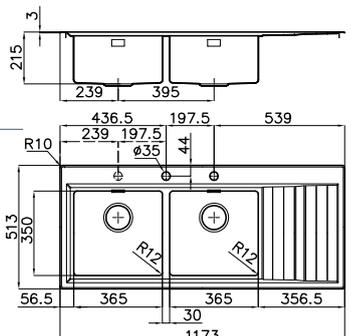	Features	Version	Ref.	Technical Drawing
<p>Cabinet 80/(90)^T (ref. page 55)</p>  <p>Included: knives holder Accessories: B6 T6 (page 91)</p>	<p>AISI 304 brushed dimensions: 1173x513 1 bowl: 750x350 cut-out: 1140x480 drain: automatic 3½" PM</p>		<p>4504 051 rh 4504 052 lh</p>	
<p>Cabinet 80/(90)^T (ref. page 55)</p>  <p>Accessories: B6 T6 (page 91)</p>	<p>AISI 304 brushed dimensions: 1173x513 2 bowls: 365x350 cut-out: 1140x480 drain: automatic 3½" PM</p>		<p>4503 051 rh 4503 052 lh</p>	 <p>Third tape hole available</p>

Stripe

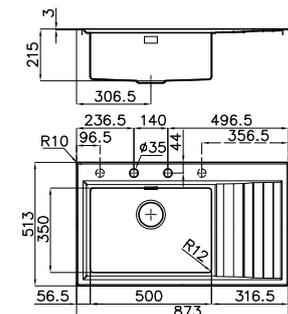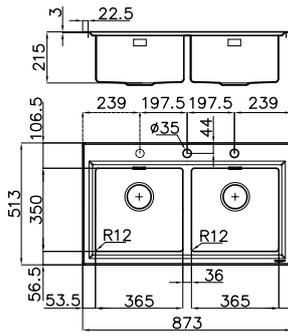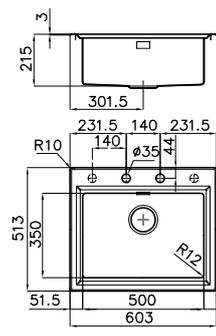	Features	Version	Ref.	Technical Drawing
<p>Cabinet 60 (ref. page 55)</p> 	<p>AISI 304 brushed dimensions: 873x513 1 bowl: 500x350 cut-out: 840x480 drain: automatic 3½" PM</p>		<p>4500 051 rh 4500 052 lh</p>	 <p>Third and fourth tap hole available</p>
<p>Accessories: B6 T6</p>				
<p>Cabinet 80(90)^T (ref. page 55)</p> 	<p>AISI 304 brushed dimensions: 873x513 2 bowls: 365x350 cut-out: 840x480 drain: automatic 3½" PM</p>		<p>4502 050</p>	 <p>Third tap hole available</p>
<p>Accessories: B6 T6</p>				
<p>Cabinet 60</p> 	<p>AISI 304 brushed dimensions: 603x513 1 bowl: 500x350 cut-out: 570x480 drain: automatic 3½" PM</p>		<p>4505 050</p>	 <p>Third and fourth tap hole available</p>
<p>Accessories: B6 T6</p>				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.



The Stripe sinks are characterized by the original and elegant striped drainer, which is at the same time support zone and water drainage area. The cutting board recalls the motif of the sink.



The sink with the 75 cm wide bowl is supplied with a practical accessory: the knife holder. An element that is coherent with the concept of a sink as a workstation.

accessories



B6
Chopping board
26x36,6 cm
8643 117




T6
St. steel dishes
holder 23x37,5
8100 305

Triplo Invaso workstation

NEW

A FUNCTIONAL CENTRE THAT COMPLETELY DISAPPEARS IN THE WORKTOP

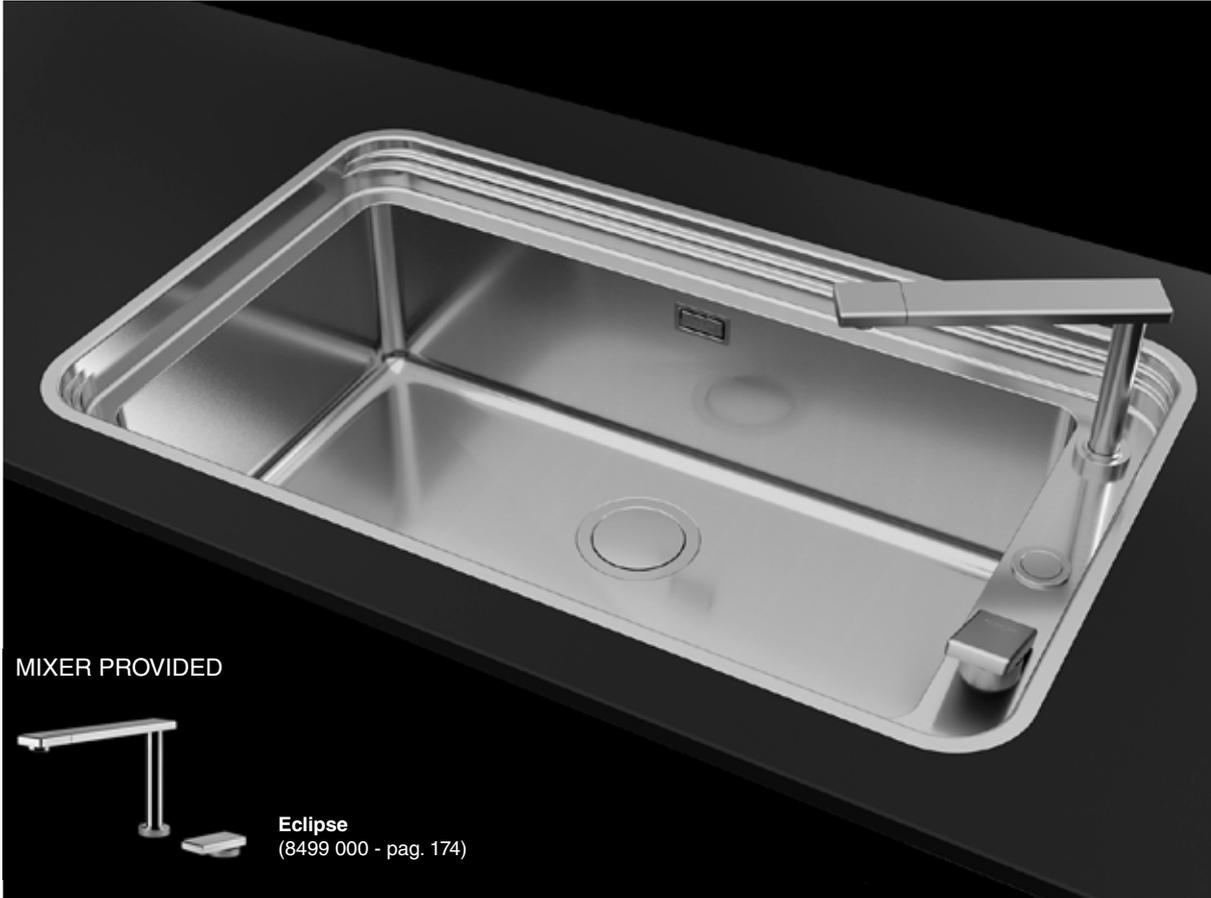

SPACE drain



Perimetric overflow





Space saver drain

MIXER PROVIDED



Eclipse
(8499 000 - pag. 174)

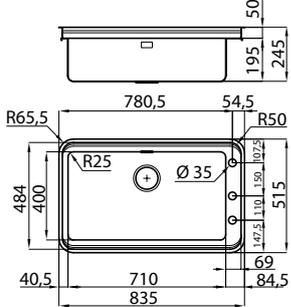	Features	Version	Ref.	Technical Drawing
Cabinet 80 	AISI 304 brushed dimensions: 835x515 1 bowl: 710x400 cut-out FT: v. sito web* up-mount (FTS): 820x500 / R58 drain: automatic SPACE 3½" PP	 FT  FTS	1491 059	
Accessories: L4 M2 N2 O2 S U2	SUPPLIED WITH:  Eclipse mixer tap (code 8499 000)		 2 black grids TI	

Accessories

 <p>L4 Glass chopping board 23x41 cm 8631 300</p>	 <p>M2 chopping board 28x48 8643 115</p>
 <p>N2 HDPE chopping board 27,2x42,5 cm 8657 001</p>	 <p>O2 White plastic bowl 27,2x41,4 cm 8153 100</p>
 <p>S St. steel basket 40x40 8612 000</p>	 <p>U2 St. steel dishes holder 23x47 8100 115</p>
 <p>White basket 40x40 8612 100</p>	




The Triplo Invaso sink disappears into the worktop, thanks to the collapsible Eclipse mixer tap and the Black grids, which completely close the bowl.



Serie Evo

NEW

THE EVOLUTION OF FUNCTIONALITY


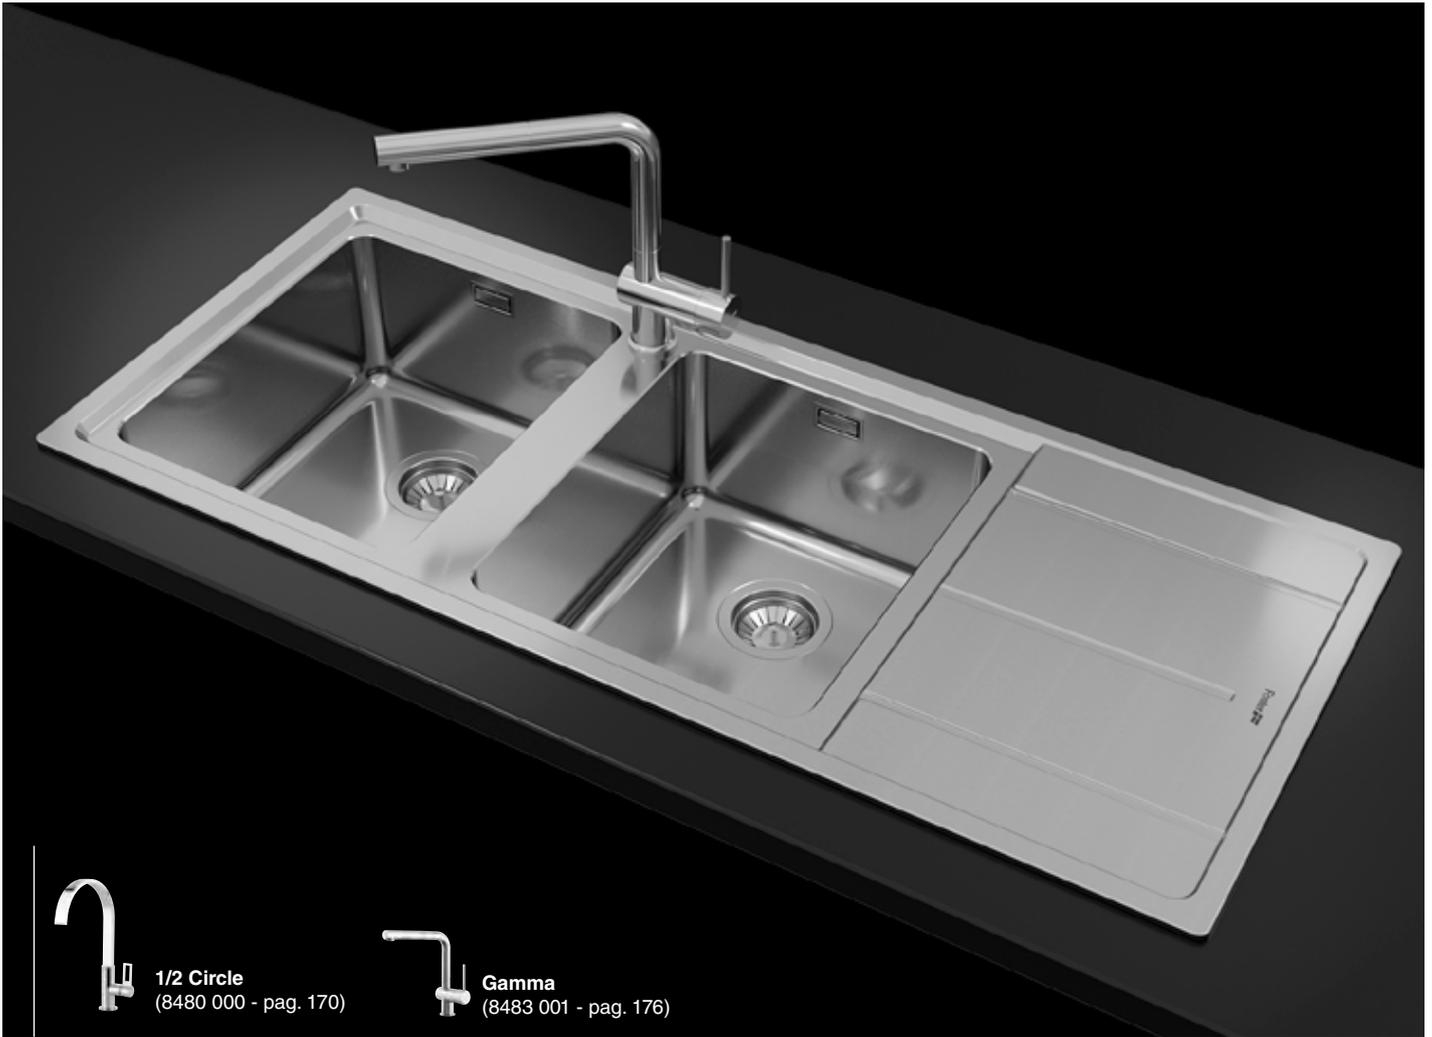


1/2 Circle
(8480 000 - pag. 170)





Gamma
(8483 001 - pag. 176)

suggested mixer taps

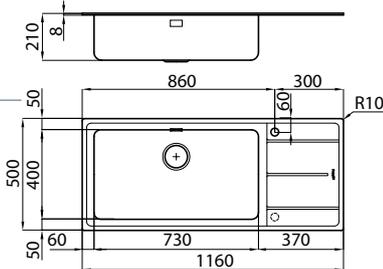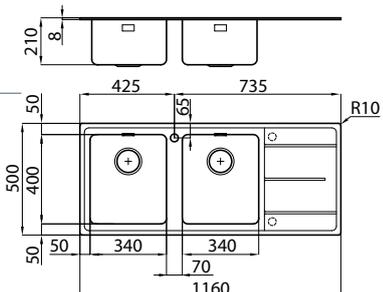	Features	Version	Ref.	Technical Drawing
<p>Cabinet 90</p>  <p>Accessories: G L3 L4 L5 M N2 N3 O2 P2 P4 S T2 T4</p> <p>Automatic drain: PA PE PM PL PP PS (see page 148-149)</p>	<p>AISI 304 brushed dimensions: 1160x500 1 bowl: 730x400 cut-out: 1140x480 drain: 3½" Perimetric overflow</p>		<p>3216 051 rh 3216 052 lh</p>	 <p>Second tap hole available</p>
<p>Cabinet 80/(90)^T (rif. pag. 53)</p>  <p>Accessories: A L3 L4 L5 M N2 N3 O2 P2 P4 R T2 T4</p> <p>Automatic drain: PA PE PM PL PP PS (see page 148-149)</p>	<p>AISI 304 brushed dimensions: 1160x500 2 bowls: 340x400 cut-out: 1140x480 drain: 3½" Perimetric overflow</p>		<p>3212 051 rh 3212 052 lh</p>	 <p>Second and third tap hole available</p>

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Serie Evo

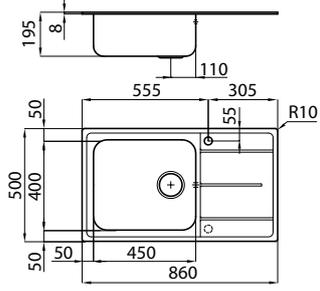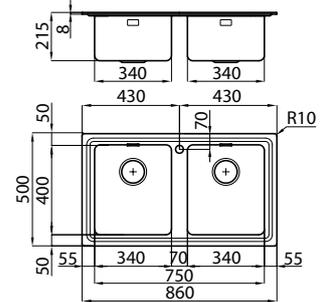	Features	Version	Ref.	Technical Drawing
Cabinet 60 	AISI 304 brushed dimensions: 860x500 1 bowl: 450x400 cut-out: 840x480 drain: 3½"		3218 001 rh 3218 002 lh	
Accessories: G L3 L4 L5 M N2 N3 O2 P2 P4 S T2 T4 Automatic drain: PA PE PM PL PP PS (see page 148-149)				Second tap hole available
Cabinet 80(90) * (rif. pag. 53) 	AISI 304 brushed dimensions: 860x500 2 bowls: 340x400 cut-out: 840x480 drain: 3½" Perimetric overflow		3274 050	
Accessories: A L3 L4 L5 M N2 N3 O2 P2 P4 R T2 T4 Automatic drain: PA PE PM PL PP PS (see page 148-149)				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Accessories

 <p>A Chopping board 34x40 8647 000</p>	 <p>G Chopping board 40x40 8646 000</p>	 <p>L3 Twin chopping board 41x41 cm 8644 004</p>	available until exhaustion	
 <p>L4 Glass chopping board 23x41 cm 8631 300</p>	 <p>L5 Glass chopping board 29x54 cm 8633 300</p>	 <p>M Sliding chopping board 30x54 8643 000</p>	 <p>M2 Chopping board 28x48 8643 115</p>	
 <p>N2 HDPE chopping board 27,2x42,5 cm 8657 001</p>	 <p>N3 HDPE Twin chopping board 31,7x42,5 cm 8644 101</p>	 <p>O2 White plastic bowl 27,2x41,4 cm 8153 100</p>	 <p>P2 ** Grating kit complete with ring support and food collection tray 8159 101</p>	
 <p>P4 Chopping board with stainless steel colander kit 8644 044</p>	 <p>Q White colander 17x32 cm 8151 100</p>	 <p>R St. steel basket 34x40 8611 000</p>	 <p>S St. steel basket 40x40 8612 000 White basket 40x40 8612 100</p>	
 <p>T2 ** St. steel dishes holder 21,4x37,9 cm 8100 303</p>	 <p>T4 St. steel dishes holder 25x43 cm 8100 301</p>	 <p>U2 St. steel dishes holder 23x47 8100 115</p>	 <p>Z * St. steel colander 25x36 cm 8154 000</p>	

*To use only with L3 chopping board **To use only with N3 chopping board

KS

QUALITY AND PRACTICALITY





KS Plus
(8522 000 - pag. 184)



NYC
(8486 000 - pag. 170)


suggested mixer taps

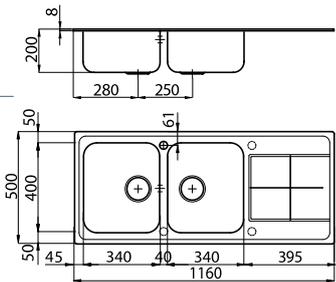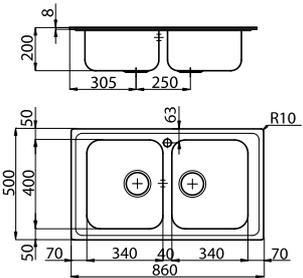
	Features	Version	Ref.	Technical Drawing
<p>Cabinet 80</p>  <p>Picture shows rh version</p> <p>Accessories: (page 97) A L4 L5 M N2 N3 O2 P2 P4 R T2 T4</p> <p>Automatic waste fitting: PR PQ PC (page 149)</p>	<p>AISI 304 brushed dimensions: 1160x500 2 bowls: 340x400 cut-out: 1140x480 drain: 3½"</p>		<p>2112 061 rh 2112 062 lh</p>	 <p>Second, third and fourth tap hole available</p>
<p>Cabinet 80/(90)† (ref. page 55)</p>  <p>Accessories: (page 97) A L4 L5 M N2 N3 O2 P2 P4 R T2 T4</p> <p>Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.</p>	<p>AISI 304 brushed dimensions: 860x500 2 bowls: 340x400 cut-out: 840x480 drain: 3½"</p>		<p>2182 060</p>	

available until exhaustion

available until exhaustion


KS

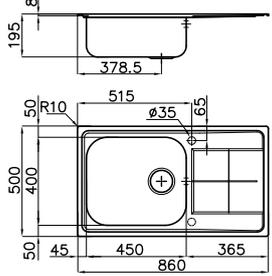	Features	Version	Ref.	Technical Drawing
Cabinet 60  <i>Picture shows rh version</i> Accessories: E L4 L5 M N2 N3 O2 P2 P4 S T2 T4 Automatic waste fitting: PR PQ PC (page 149)	AISI 304 brushed dimensions: 860x500 1 bowl: 450x400 cut-out: 840x480 drain: 3½"		2180 061 rh	 Second tap hole available
			2180 062 lh	
available until exhaustion				

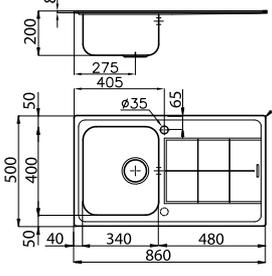Cabinet 45  <i>Picture shows rh version</i> Accessories: A L4 L5 M N2 N3 O2 P2 P4 R T2 T4 Automatic waste fitting: PR PQ PC (page 149)	AISI 304 brushed dimensions: 860x500 1 bowl: 340x400 cut-out: 840x480 drain: 3½"		2181 061 rh	 Second tap hole available
			2181 062 lh	
available until exhaustion				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

accessories

 A Chopping board 34x40 8647 000	 E Chopping board 45x40 8655 000	 L4 Glass chopping board 23x41 cm 8631 300
 L5 Glass chopping board 29x54 cm 8633 300	 M Sliding chopping board 30x54 8643 000	 N2 HDPE chopping board 27,2x42,5 cm 8657 001
 N3 HDPE Twin chopping board 31,7x42,5 cm 8644 101	 O2 White plastic bowl 27,2x41,4 cm 8153 100	 P2 ** Grating kit complete with ring support and food collection tray 8159 101
 P4 Chopping board with stainless steel colander kit 8644 044	 Q White colander 17x32 cm 8151 100	
 R St. steel basket 34x40 cm 8611 000	 S St. steel basket 40x40 8612 000 White basket 40x40 8612 100	 T2 ** St. steel dishes holder 21,4x37,9 cm 8100 303
		 T4 St. steel dishes holder 25x43 cm 8100 301

**To use only with N3 chopping board

Elettra

THE ELEGANCE OF SIMPLICITY






Luisa
(8482 000 - pag. 177)




F2000 Basso
(8459 000 - pag. 186)

suggested mixer taps

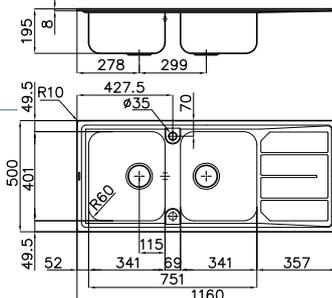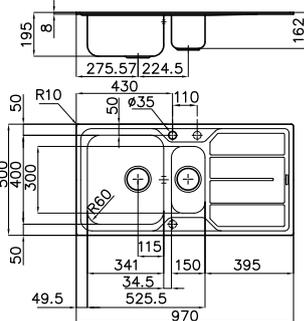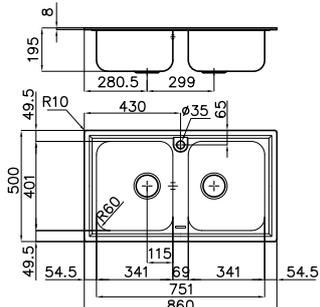	Features	Version	Ref.	Technical Drawing
<p>Cabinet 80/(90)^T (ref. page 55)</p>  <p>Picture shows lh version</p> <p>Accessories: A L4 M N2 O2 R T4 Automatic waste fitting: PR PC (page 149)</p>	<p>AISI 304 brushed dimensions: 1160x500 2 bowls: 341x401 cut-out: 1140x480 drain: 3/2"</p>		<p>5812 061 rh 5812 062 lh</p>	 <p>Second tap hole available</p>
<p>Cabinet 60</p>  <p>Picture shows lh version</p> <p>Accessories: A L4 M N2 O2 Q R T4 X Automatic waste fitting: PR PC (page 149)</p>	<p>AISI 304 brushed dimensions: 970x500 2b: 341x400 + 150x300 cut-out: 950x480 drain: 3/2"</p>		<p>5197 061 rh 5197 062 lh</p>	 <p>Second and third tap hole available</p>
<p>Cabinet 80/(90)^T (ref. page 55)</p>  <p>Accessories: A L4 M N2 O2 R T4</p>	<p>AISI 304 brushed dimensions: 860x500 2 bowls: 341x401 cut-out: 840x480 drain: 3/2"</p>		<p>5886 060</p>	

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Elettra

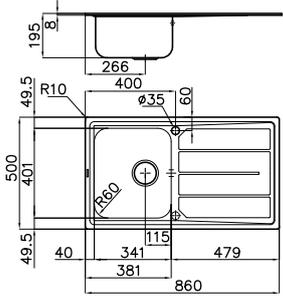	Features	Version	Ref.	Technical Drawing
Cabinet 45  <i>Picture shows lh version</i>	AISI 304 brushed dimensions: 860x500 1 bowl: 341x401 cut-out: 840x480 drain: 3½"	 STD	5186 061 rh	
		 STD	5186 062 lh	
Accessories: A L4 M N2 O2 R T4 Automatic waste fitting: PR PC (page 149)				Only taps with max ø 45 mm Cabinet footprint are installable Second tap hole available

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.



Large and deep bowls in a really practical and functional design.

accessories

	A Chopping board 34x40 8647 000		L4 Glass chopping board 23x41 cm 8631 300		M Sliding chopping board 30x54 8643 000
	N2 HDPE chopping board 27,2x42,5 cm 8657 001		O2 White plastic bowl 27,2x41,4 cm 8153 100		Q White colander 17x32 cm 8151 100
	R St. steel basket 34x40 cm 8611 000		T4 St. steel dishes holder 25x43 cm 8100 301		X St. steel colander 17x32 cm 8154 043

FM and FM Marine


THE STURDINESS OF THE SINK WITHOUT WELDING

AISI 316

AISI 316 stainless steel



Gamma 3 vie - AISI 316
(8496 100 - pag. 173)





NYC
(8486 000 - pag. 170)



Lorenzo
(8466 000 - pag. 177)

suggested mixer taps

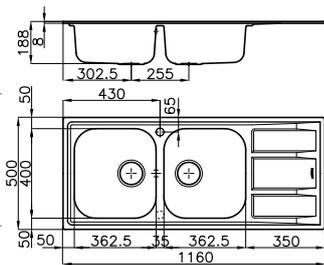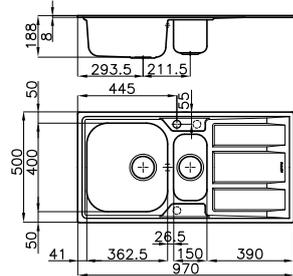	Features	Version	Ref.	Technical Drawing
Cabinet 80/(90)^T (ref. page 55) 	AISI 316 brushed dimensions: 1160x500 2 bowls: 362,5x400 cut-out: 1140x480 drain: 3½" NEW		1972 961 rh	
			1972 962 lh	
AISI 304 brushed dimensions: 1160x500 2 bowls: 362,5x400 cut-out: 1140x480 drain: 3½"		1972 061 rh		
		1972 062 lh		
Cabinet 60/(80)^T (ref. page 55) 	AISI 316 brushed dimensions: 970x500 2b: 362,5x400+150x300 cut-out: 950x480 drain: 3½" NEW		1973 961 rh	
			1973 962 lh	
AISI 304 brushed dimensions: 970x500 2b: 362,5x400+150x300 cut-out: 950x480 drain: 3½"		1973 061 rh		
		1973 062 lh		
AISI 304 microfoster dimensions: 970x500 2b: 362,5x400+150x300 cut-out: 950x480 drain: 3½"		1973 461 rh		
		1973 462 lh		

Picture shows lh version

Accessories: **L4 M N2 R T4**
 Automatic waste fitting: **PR PC** (page 149)

Second tap hole available


Picture shows lh version

Accessories: **M N2 Q R T4 X**
 Automatic waste fitting: **PR PC** (page 149)


Second and third tap hole available

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

FM and FM Marine

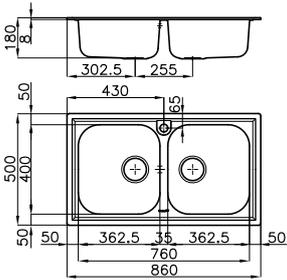	Features	Version	Ref.	Technical Drawing
Cabinet 80/(90)^T (ref. page 55) 	AISI 316 brushed dimensions: 860x500 2 bowls: 362,5x400 cut-out: 840x480 drain: 3½"	 NEW	1974 960	
	AISI 304 brushed dimensions: 860x500 2 bowls: 362,5x400 cut-out: 840x480 drain: 3½"		1974 060	

Accessories: **L4 M N2 R T4**

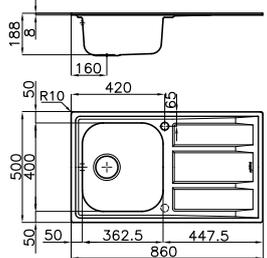Cabinet 45 	AISI 316 brushed dimensions: 860x500 1 bowl: 362,5x400 cut-out: 840x480 drain: 3½"	 NEW	1971 961 rh 1971 962 lh	
	AISI 304 brushed dimensions: 860x500 1 bowl: 362,5x400 cut-out: 840x480 drain: 3½"		1971 061 rh 1971 062 lh	

Picture shows lh version

Accessories: **L4 M N2 R T4**

Automatic waste fitting: **PR PC** (page 149)

Second tap hole available

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Deep bowls

19 cm deep and capacious bowls, inserted in a generous safe-drop profile, for this sturdy and practical sink.





Accessories

	L4 Glass chopping board 23x41 cm 8631 300		M Sliding chopping board 30x54 cm 8643 000		N2 HDPE chopping board 27,2x42,5 cm 8657 001
	Q White colander 17x32 cm 8151 100		R St. steel basket 34x40 cm 8611 000		T4 St. steel dishes holder 25x43 cm 8100 301
					X St. steel colander 17x32 cm 8154 043

Big Bowl



ALL THE CONVENIENCE OF A LARGE CAPACIOUS BOWL

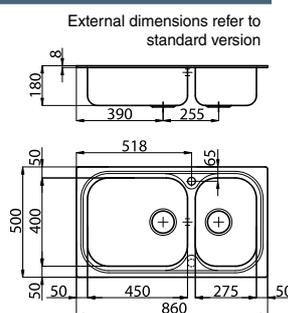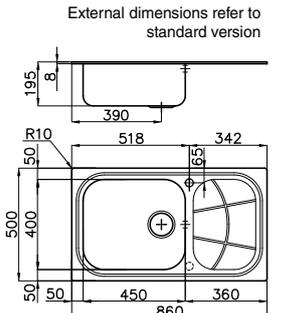

	Features	Version	Ref.	Technical Drawing
Cabinet 90  <p>Picture shows lh version</p>	AISI 304 brushed dimensions: 860x500 2b: 450x400+275x400 cut-out: 840x480 drain: 3½"		1562 001 rh 1562 002 lh	External dimensions refer to standard version 
			1072 061 rh 1072 062 lh	
available until exhaustion				
Accessories: E L4 M N2 S T3 T4 (page 103) Automatic waste fitting: PR PQ PC (page 149)				
Cabinet 60  <p>Picture shows rh version</p>	AISI 304 brushed dimensions: 860x500 1 bowl: 450x400 cut-out: 840x480 drain: 3½"		1561 201 rh 1561 202 lh	External dimensions refer to standard version 
			1071 061 rh 1071 062 lh	
Accessories: E L4 M N2 S T4 Automatic waste fitting: PR PQ PC (page 149)				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Big Bowl

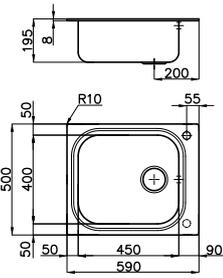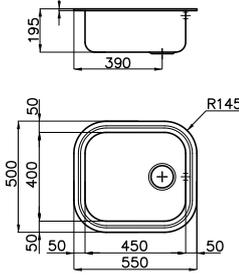	Features	Version	Ref.		Technical Drawing
Cabinet 60  Picture shows lh version Accessories: E L4 N2 S T4 Automatic waste fitting: PR PQ PC (page 149)	AISI 304 brushed dimensions: 590x500 1 bowl: 450x400 cut-out: 570x480 drain: 3½"		1511 001 rh 1511 002 lh		 Second tap hole available
Cabinet 60  Accessories: E L4 N2 S T4 Automatic waste fitting: PR PQ PC (page 149)	AISI 304 brushed dimensions: 550x500 1 bowl: 450x400 cut-out: 530x480 R 135 drain: 3½"		1611 060		External dimensions refer to standard version 

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.



The main feature of the Big Bowl sinks is the large 45x40 cm bowl. A practical and versatile solution.

accessories



E
Chopping board 45x40
8655 000



L4
Glass chopping board
23x41 cm
8631 300



M
Sliding chopping board 30x54
8643 000



N2
HDPE chopping board
27,2x42,5 cm
8657 001



Q
White colander
17x32 cm
8151 100



S
St. steel basket 40x40
8612 000

White basket 40x40
8612 100



T3
St. steel dishes holder 28x40 cm
8100 280



T4
St. steel dishes holder 25x43 cm
8100 301

Uragano

A SINGLE BOWL FOR GREAT PERFORMANCE



suggested mixer taps

	Features	Version	Ref.	Technical Drawing
--	----------	---------	------	-------------------

Cabinet 100



AISI 304 brushed
dimensions: **970x500**
1 bowl: **910x440**
cut-out: 950x480
drain: 3½"



1555 600

1555 609
accessory kit
included


AISI 304 brushed
dimensions: **983x513**
1 bowl: **910x440**
cut-out: 950x480
drain: 3½"



1054 600

available until exhaustion

Technical Drawing

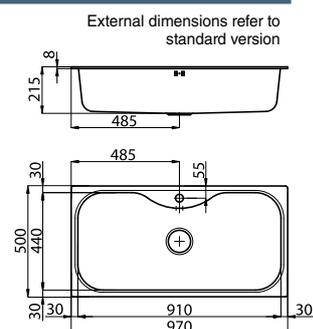

Accessories:

I L2 O Q T U V Z (page 106)

Cabinet 100



AISI 304 brushed
dimensions: **983x513**
1 bowl: **910x440**
cut-out: flush-mount (FT):
web site
up-mount (FTS):
970x500 R 145
drain: 3½"




1055 600



1055 600

available until exhaustion

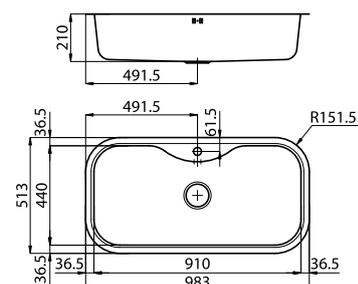

Accessories:

I L2 O Q T U V Z (page 106)

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Uragano accessory kit



I
Chopping board
37x46 cm
8659 112



V
St. steel bowl holder
37x45 cm
8100 112



O
White plastic bowl
36x30 cm
8152 100



Q
White colander
17x32 cm
8151 100

Discover the great functionality of the big Uragano bowl, available also in the accessorized version, including the practical kit aside.
For the full range of matching accessories



Tornado

ALL YOU NEED IN 80 CM





Lorenzo
(8466 000 - pag. 177)



Gamma
(8483 001 - pag. 176)


suggested mixer taps

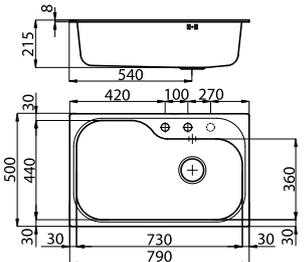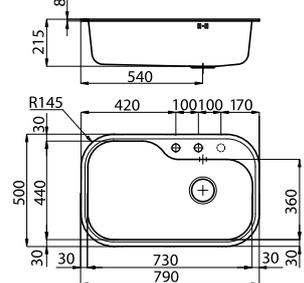	Features	Version	Ref.	Technical Drawing
<p>Cabinet 80</p> 	<p>AISI 304 brushed dimensions: 790x500 1 bowl: 730x440 cut-out: 770x480 drain: automatic 3½"</p>		1579 660	<p>External dimensions refer to standard version</p> 
	<p>AISI 304 brushed dimensions: 803x513 1 bowl: 730x440 cut-out: 770x480 drain: automatic 3½"</p>		1078 660	
<p>Accessories: H I L O Q T U Z (page 106)</p>				Third tap hole available
<p>Cabinet 80</p> 	<p>AISI 304 brushed dimensions: 790x500 1 bowl: 730x440 cut-out: 770x480 R 135 drain: automatic 3½"</p>		1679 660	<p>External dimensions refer to standard version</p> 
<p>available until exhaustion</p> <p>Accessories: H I L O Q T U Z (page 106)</p>				


Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.



7" Uragano and Tornado

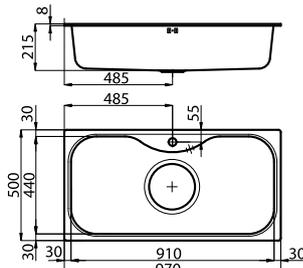	Features	Version	Ref.	Technical Drawing
Cabinet 100	AISI 304 brushed dimensions: 970x500 1 bowl: 910x440 cut-out: 950x480 drain: 7"		1555 070	


Accessories: **I L2 O Q T U V Z**

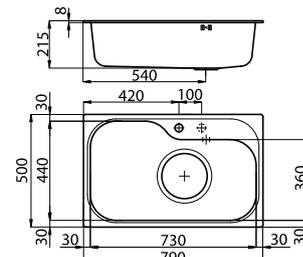Cabinet 80	AISI 304 brushed dimensions: 790x500 1 bowl: 730x440 cut-out: 770x480 drain: 7"		1579 670	
-------------------	---	---	----------	---

available until exhaustion

Accessories: **H I L2 O Q T U Z**

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), 7" waste fitting/siphon, overflow. Packing: single carton box.

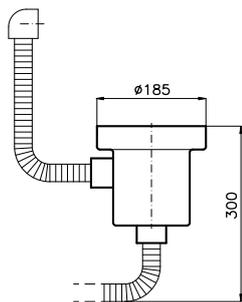

Extralarge waste fittings

The large bowls of Uragano and Tornado are particularly suited to the drain with 7" hole: an original solution, very practical thanks to the large stainless steel collecting basket (code 8403309).



accessories

 H Chopping board 37x30 8659 111	 L Chopping board 37x46 cm 8659 112	 L2 Twin chopping board 37x46 cm 8644 003	 O ** White plastic bowl 36x30 cm 8152 100
available until exhaustion			
 Q White colander 17x32 cm 8151 100	 T * St. steel dishes holder 25x35 cm 8100 154	 U St. steel dishes holder 25x45 cm 8100 111	 V St. steel bowl holder 37x45 cm 8100 112
			 Z * St. steel colander 25x36 cm 8154 000

*to use only with L2 chopping board **to use only with V bowl holder

Angolare NEW

SOLUTIONS TO ENHANCE THE CORNERS





Twix Plus
(8427 020 - pag. 171)



Camillo
(8467 000 - pag. 169)

suggested mixer taps

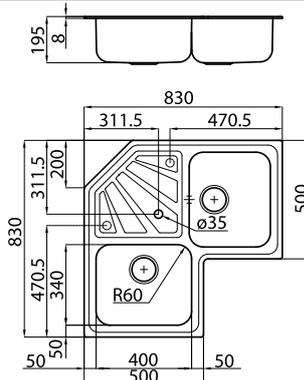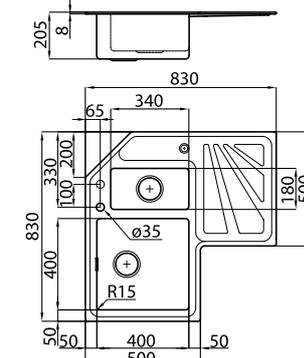	Features	Version	Ref.	Technical Drawing
<p>Cabinet 90x90</p> 	<p>AISI 304 brushed dimensions: 830x830 2 bowls: 340x400 cut-out: see web site drain: 3/2"</p>		<p>3303 060</p>	
<p>Accessories: A N2 O2 R T4 (page 108)</p>				
<p>Cabinet 90 (linear)</p> 	<p>AISI 304 brushed dimensions: 830x830 2b: 400x400+180x340 cut-out: see web site drain: 3/2" + 1 1/4" on drainer</p>		<p>3308 050</p>	
<p>Accessories: L3 L4 N2 N3 O2 L3 P2 P4 S T T1 T2 Z Z2 (page 108)</p> <p>Automatic waste fitting: PA PE PM PL PP PS (page 149)</p>				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Circolari NEW

SIMPLICITY GOES AROUND




S1000 - Z65
(8449 500 - pag. 187)



F2000 alto
(8458 000 - pag. 185)

suggested mixer taps

	Features	Version	Ref.	Technical Drawing
Cabinet 45 	AISI 304 brushed dimensions: Ø 425 1 bowl: Ø 380 cut-out: flush-mount (FT): web site up-mount (FTS): 410* drain: 3½"	 FT	1130 060	
		 FTS	1130 060	

* The cut-out requires the machining of a recess to house the overflow pipe (see website)

Automatic waste fitting: **PR PQ PC** (page 149)

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Accessories

 <p>A Chopping board 34x40 8647 000</p>	 <p>L3 Twin chopping board 41x41 cm 8644 004</p>	 <p>L4 Glass chopping board 23x41 cm 8631 300</p>		
 <p>M Sliding chopping board 30x54 8643 000</p>	 <p>N2 HDPE chopping board 27,2x42,5 cm 8657 001</p>	 <p>N3 HDPE Twin chopping board 31,7x42,5 cm 8644 101</p>	 <p>O2 White plastic bowl 27,2x41,4 cm 8153 100</p>	 <p>P2 Grating kit complete with ring support and food collection tray - 8159 101</p>
 <p>P4 Chopping board with stainless steel colander kit 8644 044</p>	 <p>R St. steel basket 34x40 cm 8611 000</p>	 <p>S St. steel basket 40x40 8612 000</p> <p>White basket 40x40 8612 100</p>	 <p>T St. steel dishes holder 25x35 cm 8100 154</p>	 <p>T1 Dishes holder 25x42,5 cm 8100 201</p>
 <p>T2 St. steel dishes holder 21,4x37,9 cm 8100 303</p>	 <p>T4 St. steel dishes holder 25x43 cm 8100 301</p>	 <p>Z St. steel colander 25x36 cm 8154 000</p>	 <p>Z2 St. steel perforated pan 21,5x38 cm 8151 000</p>	

S1000

QUALITY AND THICKNESS OF FOSTER STEEL






Lorenzo
(8466 000 - pag. 177)








S1000 - RO
(8443 002 - pag. 188)

suggested mixer taps

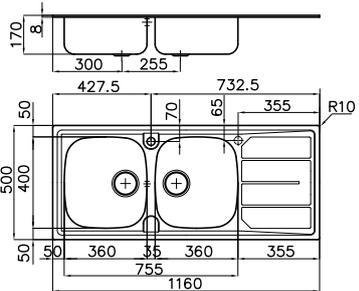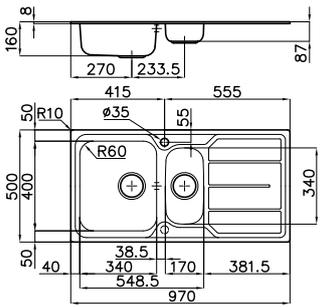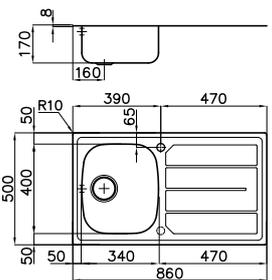	Features	Version	Ref.	Technical Drawing	
Cabinet 80/(90)^T (ref. page 55)  <p>Picture shows lh version</p>	AISI 304 brushed dimensions: 1160x500 2 bowls: 360x400 cut-out: 1140x480 drain: 3½"		1812 161 rh	 <p>Second tap hole available</p>	
			1812 162 lh		
AISI 304 microfoster dimensions: 1160x500 2 bowls: 360x400 cut-out: 1140x480 drain: 3½"		1812 461 rh			
		1812 462 lh	available until exhaustion		
Accessories: M N2 R T4 (page 108) Automatic waste fitting: PR PQ PC (page 149)					
Cabinet 60/(80)^T (ref. page 55)  <p>Picture shows lh version</p>	AISI 304 brushed dimensions: 970x500 2b: 340x400+170x300 cut-out: 950x480 drain: 3½"		1197 161 rh	 <p>Second tap hole available</p>	
			1197 162 lh		
AISI 304 microfoster dimensions: 970x500 2b: 340x400+170x340 cut-out: 950x480 drain: 3½"		1197 461 rh			
		1197 462 lh	available until exhaustion		
Accessories: M N2 R T4 (page 108) Automatic waste fitting: PR PQ PC (page 149)					
Cabinet 45  <p>Picture shows lh version</p>	AISI 304 brushed dimensions: 860x500 1 bowl: 340x400 cut-out: 840x480 drain: 3½"		1186 161 rh	 <p>Second tap hole available</p>	
			1186 162 lh		
Accessories: M N2 R T4 (page 108) Automatic waste fitting: PR PQ PC (page 149)					

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

S1000

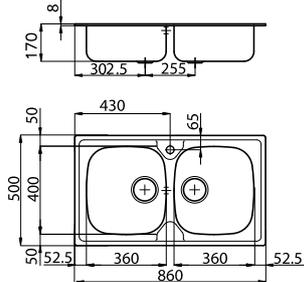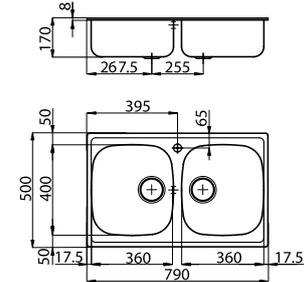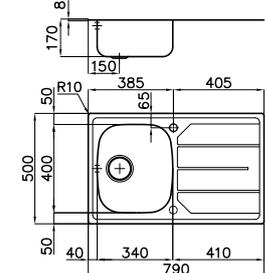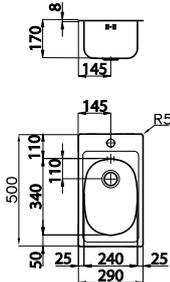	Features	Version	Ref.	Technical Drawing
<p>Cabinet 80(90)^T (ref. page 55)</p> 	<p>AISI 304 brushed dimensions: 860x500 2 bowls: 360x400 cut-out: 840x480 drain: 3½"</p>		<p>1886 160</p>	
<p>Accessories: M N2 R T4 (page 108)</p>				
<p>Cabinet 80</p> 	<p>AISI 304 brushed dimensions: 790x500 2 bowls: 360x400 cut-out: 770x480 drain: 3½"</p>		<p>1279 060</p>	
<p>Accessories: M N2 R T4 (page 108)</p>				
<p>Cabinet 45</p> 	<p>AISI 304 brushed dimensions: 790x500 1 bowl: 340x400 cut-out: 770x480 drain: 3½"</p>		<p>1179 061 rh 1179 062 lh</p>	 <p>Second tap hole available</p>
<p>Picture shows lh version</p> <p>Accessories: M N2 R T4 (page 108)</p> <p>Automatic waste fitting: PR PQ PC (page 149)</p>				
<p>Cabinet 45</p> 	<p>AISI 304 brushed dimensions: 440x500 1 bowl: 360x360 cut-out: 420x480 drain: 2"</p>		<p>1144 001 rh 1144 002 lh</p>	
<p>Picture shows lh version</p> <p>Version DX means right faucet hole, SX left faucet hole</p>				
<p>Cabinet 30</p> 	<p>AISI 304 brushed dimensions: 290x500 1 bowl: 240x340 cut-out: 270x480 drain: 2"</p>		<p>1129 000</p>	

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.


S1000 Single bowl

THE PRACTICALITY OF A LARGE BOWL



Perimetric overflow

suggested mixer taps

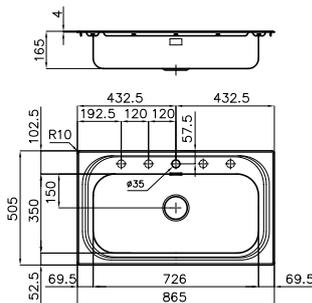	Features	Version	Ref.	Technical Drawing
<p>Cabinet 80</p> 	<p>AISI 304 brushed dimensions: 865x505 1 bowl: 726x350 cut-out: 840x480 drain: 3½"</p>	 BR	<p>1180 150</p>	 <p>Second and third tap hole available</p>
<p>Accessories: L5 M B6 T6 Automatic drain: PA PE PM PL PP PS (see page 148-149)</p>				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

S1000 accessories



L5
Glass chopping board
29x54 cm
8633 300



M
Sliding chopping board 30x54
8643 000



B6
Chopping board 26x36,6 cm
8643 117



T6
St. steel dishes holder 23x37 cm
8100 305



UNDERMOUNT SINKS



Foster
Milano
p. 114



Milanello
workstation
p. 116

NEW



Triplo Invaso
Workstation
p. 119

NEW



GK p. 120



Quadra
p. 122



S4001
p. 124

NEW



Serie 45
p. 126

NEW



Serie 35
p. 127

NEW



KE-R15
p. 128

NEW



KE
Gun Metal
p. 132

NEW



KE Gold
p. 134

NEW



KE Copper
p. 135

NEW



S400
p. 136



KS p. 137

NEW



Big Bowl
p. 138



Circolari
p. 138

NEW



Elettra
p. 139




Tornado
p. 139



Foster Milano

AN INNOVATIVE CONCEPT OF FUNCTIONALITY

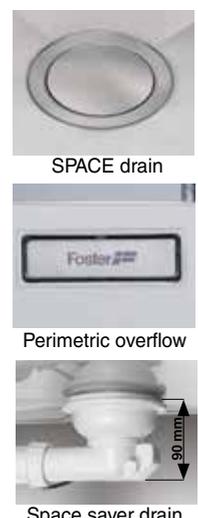

suggested mixer taps

	Features	Version	Ref.	Technical Drawing
--	----------	---------	------	-------------------


Cabinet 120



AISI 304 satin finish
 bowl: **968x400**
 dimensions: 1016x500
 cut-out: 968x452
 drain: SPACE 3½"



1015 850

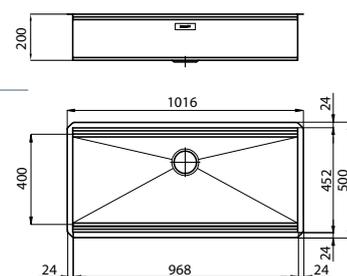

Accessories: (page 115)

M6 P3 L4 N3 O2 P2 T2 Z2 PS

Automatic waste fitting: PA PE PM PL PP PS (p.148)



Black grids configurations edge positioning



Black grids configurations bottom positioning


Cabinet 120



AISI 304 satin finish
 2 bowls: **462x400**
 dimensions: 1016x500
 cut-out: 968x452
 drain: SPACE 3½"



1016 850

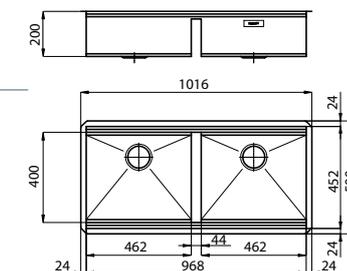

Accessories: (page 115)

M6 P3 L4 N3 O2 P2 T2 Z2 PS

Automatic waste fitting: PA PE PM PL PP PS (p.148)




Black grids configurations edge positioning




Black grids configurations bottom positioning

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Foster Milano

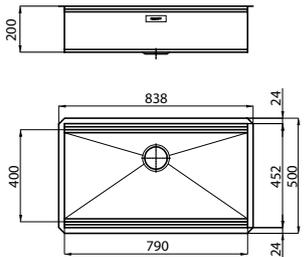	Features	Version	Ref.	Technical Drawing
Cabinet 90 	AISI 304 satin finish bowl: 790x400 dimensions: 838x500 cut-out: 790x452 drain: SPACE 3½"	 ST	1014 850	

Cabinet 60 	AISI 304 satin finish bowl: 462x400 dimensions: 510x500 cut-out: 462x452 drain: SPACE 3½"	 ST	1013 850	

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.



Three steps system

The sink has an ingenious design that makes it simple to use a large set of optional Accessories. On the first supporting step, the topmost one, the Black grids slide, creating a large and practical surface to rinse food.



Complete range of Accessories

The second step is meant to support and allow the sliding of a complete combination of Accessories, which make some operation practical and safe: rinse, drain, slice, grate... everything can be done inside the sink.



Protection grid on the bottom

The third supporting step is on the bottom of the bowl. On this step rest the Black grids, making it possible to rinse foodstuffs without their coming in contact with the bottom of the sink, which may be dirty.

Accessories

 <p>L4 Glass chopping board 23x41 cm 8631 300</p>	 <p>M6 Nut wood chopping board 18x44,8 cm 8642 000</p>	 <p>N3 HDPE Twin chopping board 31,7x42,5 cm 8644 101</p>	 <p>O2 White plastic bowl 27,2x41,4 cm 8153 100</p>
 <p>P2 * Grating kit complete with ring support and food collection tray 8159 101</p>	 <p>P3 Black grid 39,2x44,8 cm 8100 600</p>	 <p>T2 * St. steel dishes holder 21,4x37,9 cm 8100 303</p>	 <p>Z2 * St. steel perforated pan 21,5x38 cm 8151 000</p>

*To use only with N3 chopping board

Milanello workstation

MILANELLO WORK-STATION BENEATH THE GRIDS, AN INCOMPARABLE SLIDING KIT OF ACCESSORIES.



SPACE drain







Perimetric overflow



Space saver drain



Milanello workstation

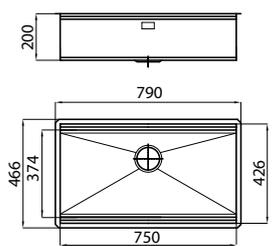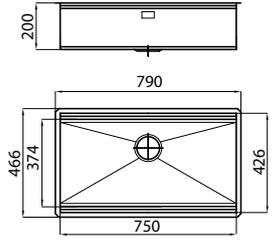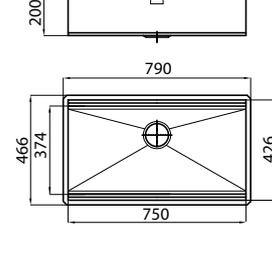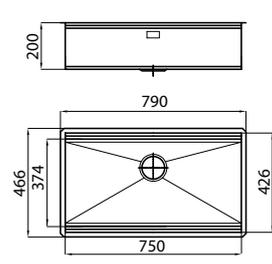	Features	Version	Ref.	Technical Drawing
<p>Cabinet 90</p>  <p>Included: 2 Black Milanello grids (8100 602) Optional Accessories: Z3 T8 M7 L3 L4 N3 N2 P2 T T2 Z Z2 Automatic waste fittings: PP (see page 148)</p>	<p>AISI 304 satin finish bowl: 750x374 dimensions: 790x466 cut-out: see web site drain: SPACE 3½"</p>		<p>1034 850</p>	
<p>Cabinet 90</p>  <p>Included: 2 Black Milanello grids (8100 602) Optional Accessories: Z3 T8 M7 L3 L4 N3 N2 P2 T T2 Z Z2 Automatic waste fittings: PO (see page 148)</p>	<p>AISI 304 Gun Metal bowl: 750x374 dimensions: 790x466 cut-out: see web site drain: 3½" Gun Metal</p>		<p>1034 856</p>	
<p>Cabinet 90</p>  <p>NEW</p> <p>Included: 2 Black Milanello grids (8100 602) Optional Accessories: Z3 T8 M7 L3 L4 N3 N2 P2 T T2 Z Z2 Automatic waste fittings: PD (see page 148)</p>	<p>AISI 304 Gold bowl: 750x374 dimensions: 790x466 cut-out: see web site drain: 3½" Gold</p>		<p>1034 859</p>	
<p>Cabinet 90</p>  <p>NEW</p> <p>Included: 2 Black Milanello grids (8100 602) Optional Accessories: Z3 T8 M7 L3 L4 N3 N2 P2 T T2 Z Z2 Automatic waste fittings: PB (see page 148)</p>	<p>AISI 304 Copper bowl: 750x374 dimensions: 790x466 cut-out: see web site drain: 3½" Copper</p>		<p>1034 858</p>	

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

suggested mixer taps



Milanello
(8425 100 - page 164)



Skin Gun Metal
(8424 856 - page 166)



Omega Gun Metal
(8497 856 - page 181)



Omega Copper
(8497 400 - page 182)



Omega Gold
(8497 700 - page 182)

Milanello workstation

	Features	Version	Ref.			Technical Drawing
--	----------	---------	------	--	--	-------------------

Cabinet 90




AISI 304 satin finish
 bowl: **430x374**
 dimensions: 790x466
 cut-out: see web site
 drain: SPACE 3½"



1040 851 rh
 1040 852 lh

available until exhaustion

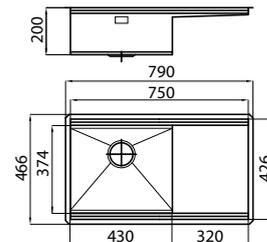


Included: **2 Black Milanello grids** (8100 602)


Optional Accessories:

Z3 T8 L3 L4 M7 N3 N2 P2 T T2 Z Z2

Automatic waste fittings: **PP** (see page 148)



Black grids configurations edge positioning



Black grids configurations bottom positioning


Cabinet 60



AISI 304 satin finish
 bowl: **430x374**
 dimensions: 470x466
 cut-out: see web site
 drain: SPACE 3½"



1031 850



Included: **1 Black Milanello grid** (8100 602)

Optional Accessories:

Z3 T8 L3 L4 M7 N3 N2 P2 T T2 Z Z2

Automatic waste fittings: **PP** (see page 148)



Black grids configurations edge positioning



Black grids configurations bottom positioning

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.



Black grids supplied for full-bowl coverage (code 8100 602).

Accessories

sliding Accessories under black grids



Z3
 St. steel colander
 21,5x40 cm
 8156 000



T8
 St. steel dishes holder
 21,4x37,2 cm
 8100 306

further Accessories



L3
 Twin chopping board
 41x41 cm
 8644 004



L4
 Glass chopping board
 23x41 cm
 8631 300



M7
 Walnut chopping board
 15,8x42,4 cm
 8642 003



N2
 HDPE chopping board
 27,2x42,5 cm
 8657 001



N3
 HDPE Twin chopping board
 31,7x42,5 cm
 8644 101



P2 **
 Grating kit complete with ring support and food collection tray
 8159 101



T *
 St. steel dishes holder
 25x35 cm
 8100 154



T2 **
 St. steel dishes holder
 21,4x37,9 cm
 8100 303




Z *
 St. steel colander
 25x36 cm
 8154 000



Z2 **
 St. steel perforated pan
 21,5x38 cm
 8151 000

*To use only with L3 chopping board **To use only with N3 chopping board


Triplo Invaso Workstation **NEW**

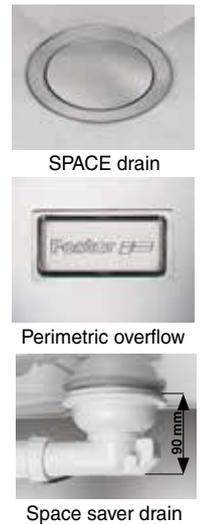

MIXER INCLUDED



Eclipse
(8499 000 - page 174)

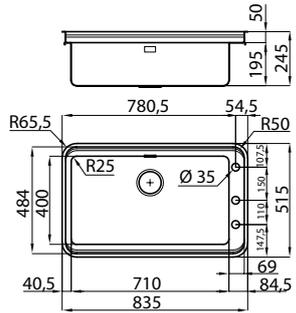	Features	Version	Ref.	Technical Drawing
<p>Cabinet 90</p> 	<p>AISI 304 brushed dimension: 835x515 1 bowl: 710x400 cut-out: see web site* drain: automatic SPACE 3 1/2" PP</p>	<p> ST</p>	<p>1491 059</p>	
<p>INCLUDED</p>  <p>Eclipse mixer tap (code 8499 000)</p>  <p>2 black grids TI (code 8100 603)</p>				
<p>Accessories: L4 M2 N2 O2 S U2</p>				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

The Triplo Invaso sink "disappears" into the worktop, thanks to the collapsible Eclipse mixer and the Black grids, which fully cover the bowl



Accessories





GK

AN MINIMAL, BUT SOPHISTICATED DESIGN



suggested mixer taps

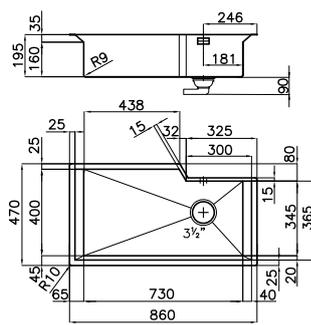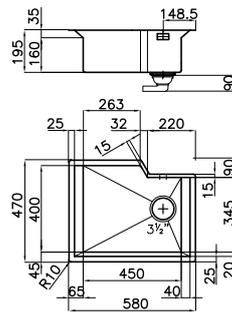	Features	Version	Ref.	Technical Drawing
Cabinet 90 	AISI 304 satin finish bowl: 73x40 cm dimensions: 860x470 cut-out: see web site drain: SPACE 3½"	 ST	1401 800	
available until exhaustion Accessories: M4 N4 T2 P2 Z2 Autom. waste fitting: PA PE PM PL PP PS (p.148)				
Cabinet 60 	AISI 304 satin finish bowl: 45x40 cm dimensions: 580x470 cut-out: see web site drain: SPACE 3½"	 ST	1403 800	
available until exhaustion Accessories: M4 N4 T2 P2 Z2 Autom. waste fitting: PA PE PM PL PP PS (p.148)				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

GK

	Features	Version	Ref.	Technical Drawing
--	----------	---------	------	-------------------


Cabinet 60



AISI 304 satin finish
 bowl: **37x40 cm**
 dimensions: 480x450
 cut-out: see web site
 drain: **SPACE 3½"**



1405 800

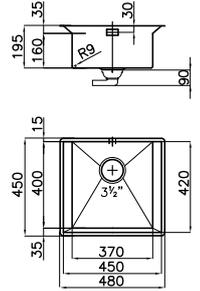

available until exhaustion

Accessories: **M4** **N4**

T2 **P2** **Z2** to be used only with chopping board **N4**

Autom. waste fitting: **PA** **PE** **PM** **PL** **PP** **PS** (p.148)

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Accessories



M4
Iroko chopping board
8656 001



N4
HDPE Twin
chopping board
8644 100



T2
St. steel dishes holder
21,4x37,9 cm
8100 303



P2
Grating kit complete with
ring support and food
collection bowl
8159 101








Z2
St. steel perforated pan
8151 000






PA
Automatic waste fitting
8407 108

Quadra

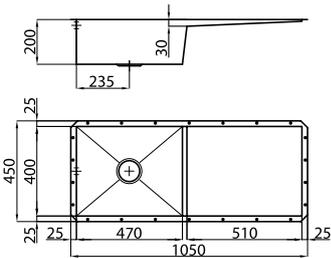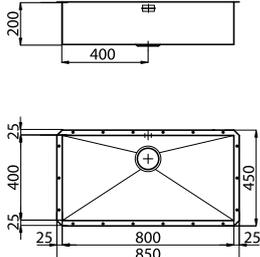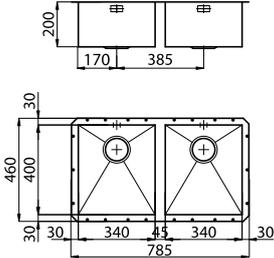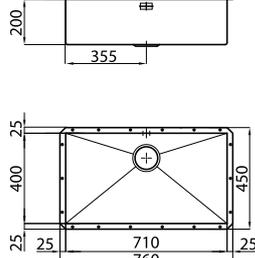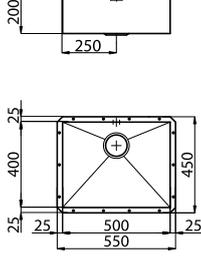	Features	Version	Ref.	Technical Drawing
<p>Cabinet 120</p>  <p>Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2</p> <p>Autom. waste fitting: PA PE PM PL PP PS (p.148)</p>	<p>AISI 304 satin finish bowl: 47x40 cm dimension: 1050x450 cut-out: see web site drain: 3½" Perimetric overflow</p>		<p>1210 850</p>	
<p>Cabinet 90</p>  <p>Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2</p> <p>Autom. waste fitting: PA PE PM PL PP PS (p.148)</p>	<p>AISI 304 satin finish bowl: 80x40 cm dimensions: 850x450 cut-out: see web site drain: 3½" Perimetric overflow</p>		<p>1218 850</p>	
<p>Cabinet 80</p>  <p>Accessories: L4 N2 N3 O2 P2 P4 R T1 T2 Z2</p> <p>Autom. waste fitting: PA PE PM PL PP PS (p.148)</p>	<p>AISI 304 satin finish bowl: (2x) 34x40 cm dimensions: 785x460 cut-out: see web site drain: 3½" Perimetric overflow</p>		<p>1208 850</p>	
<p>Cabinet 80</p>  <p>Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2</p> <p>Autom. waste fitting: PA PE PM PL PP PS (p.148)</p>	<p>AISI 304 satin finish bowl: 71x40 cm dimensions: 760x450 cut-out: see web site drain: 3½" Perimetric overflow</p>		<p>1217 850</p>	
<p>Cabinet 60</p>  <p>Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2</p> <p>Autom. waste fitting: PA PE PM PL PP PS (p.148)</p>	<p>AISI 304 satin finish bowl: 50x40 cm dimensions: 550x450 cut-out: see web site drain: 3½" Perimetric overflow</p>		<p>1215 850</p>	

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Quadra

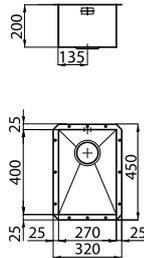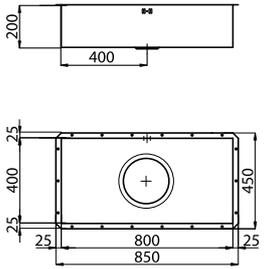	Features	Version	Ref.	Technical Drawing
Cabinet 45	AISI 304 satin finish bowl: 40x40 cm dimensions: 450x450 cut-out: see web site drain: 3½" Perimetric overflow	 ST	1214 850	
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2				
Autom. waste fitting: PA PE PM PL PP PS (p.148)				
Cabinet 40	AISI 304 satin finish bowl: 27x40 cm dimensions: 320x450 cut-out: see web site drain: 3½" Perimetric overflow	 ST	1202 850	
Accessories: L4 N2 O2 T1				
Autom. waste fitting: PA PE PM PL PP PS (p.148)				
Quadra 7" Cabinet 90	AISI 304 satin finish bowl: 80x40 cm dimensions: 850x450 cut-out: see web site drain: 7"	 ST	1218 897	
Accessories: L3 L4 N2 O2 S T T1 Z				
Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.				

Accessories

 L3 Twin chopping board 41x41 cm 8644 004	 L4 Glass chopping board 23x41 cm 8631 300	 N2 HDPE chopping board 27,2x42,5 cm 8657 001	 N3 HDPE Twin chopping board 31,7x42,5 cm 8644 101	 O2 White plastic bowl 27,2x41,4 cm 8153 100	 P2 ** Grating kit complete with ring support and food collection tray 8159 101
 P4 Chopping board with stainless steel colander kit 8644 044	 R St. steel basket 34x40 cm 8611 000	 S St. steel basket 40x40 8612 000 White basket 40x40 8612 100	 T * St. steel dishes holder 25x35 cm 8100 154	 T1 St. steel dishes holder 25x42,5 cm 8100 201	 T2 ** St. steel dishes holder 21,4x37,9 cm 8100 303
 Z * St. steel colander 25x36 cm 8154 000	 Z2 ** St. steel perforated pan 21,5x38 cm 8151 000				

*To use only with L3 chopping board **To use only with N3 chopping board

S4001 - undermount bowls **NEW**

ESSENTIAL QUALITY



SPACE drain



Perimetric overflow



Space saver drain



Tre Alto
(8468 000 - page 172)



1/2 Circle
(8480 000 - page 170)

suggested mixer taps

	Features	Version	Ref.	Technical Drawing
--	----------	---------	------	-------------------


Cabinet 90



AISI 304 satin finish
dimension: **840x440**
1 bowl: **800x400**
cut-out: 800x400
drain: SPACE 3½"



3358 850

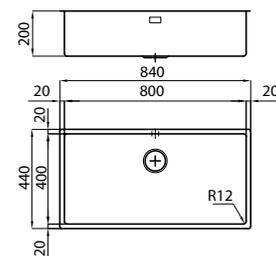

Accessories: **L3 L4 N2 N3 O2 P2 P4 S T T1**

T2 Z Z2

Autom. waste fitting: **PA PE PM PL PP PS**
(see page 148-149)


Cabinet 80



AISI 304 satin finish
dimension: **750x440**
1 bowl: **710x400**
cut-out: 710x400
drain: SPACE 3½"



3357 850

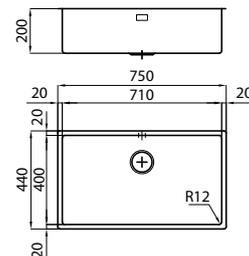

Accessories: **L3 L4 N2 N3 O2 P2 P4 S T T1**

T2 Z Z2

Autom. waste fitting: **PA PE PM PL PP PS**
(see page 148-149)


Cabinet 80



AISI 304 satin finish
dimension: **750x440**
2 bowls: **340x400**
cut-out: 710x400
drain: SPACE 3½"



3352 850

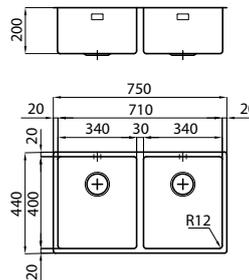




Accessories:

L4 N2 N3 O2 P2 P4 R T1 T2 Z2

Autom. waste fitting: **PA PE PM PL PP PS**
(see page 148-149)

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

S4001 - undermount bowls NEW

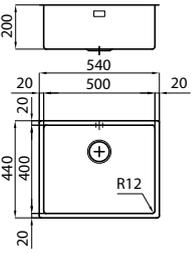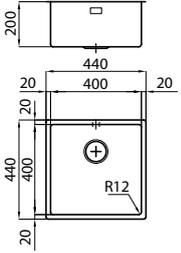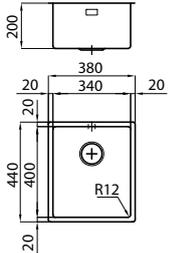Cabinet 60	Features	Version	Ref.	Technical Drawing
	AISI 304 satin finish dimension: 540x440 1 bowl: 500x400 cut-out: 500x400 drain: SPACE 3½"		3355 850	
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Autom. waste fitting: PA PE PM PL PP PS (see page 148-149)				
	AISI 304 satin finish dimension: 440x440 1 bowl: 400x400 cut-out: 400x400 drain: SPACE 3½"		3356 850	
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Autom. waste fitting: PA PE PM PL PP PS (see page 148-149)				
	AISI 304 satin finish dimension: 380x440 1 bowl: 340x400 cut-out: 340x400 drain: SPACE 3½"		3353 850	
Accessories: L4 N2 N3 O2 P2 P4 R T1 T2 Z2 Autom. waste fitting: PA PE PM PL PP PS (see page 148-149)				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.


Accessories

 <p>L3 Twin chopping board 41x41 cm 8644 004</p>	 <p>L4 Glass chopping board 23x41 cm 8631 300</p>		
 <p>N2 HDPE chopping board 27,2x42,5 cm 8657 001</p>	 <p>N3 HDPE Twin chopping board 31,7x42,5 cm 8644 101</p>	 <p>O2 White plastic bowl 27,2x41,4 cm 8153 100</p>	 <p>P2 ** Grating kit complete with ring support and food collection tray 8159 101</p>
 <p>P4 Chopping board with stainless steel colander kit 8644 044</p>	 <p>R St. steel basket 34x40 cm 8611 000</p>	 <p>S St. steel basket 40x40 8612 000 White basket 40x40 8612 100</p>	 <p>T * St. steel dishes holder 25x35 cm 8100 154</p>
 <p>T1 St. steel dishes holder 25x42,5 cm 8100 201</p>	 <p>T2 ** St. steel dishes holder 21,4x37,9 cm 8100 303</p>	 <p>Z * St. steel colander 25x36 cm 8154 000</p>	 <p>Z2 ** St. steel perforated pan 21,5x38 cm 8151 000</p>


*To use only with L3 chopping board **To use only with N3 chopping board

45 Series **NEW**


OVERSIZED BOWLS

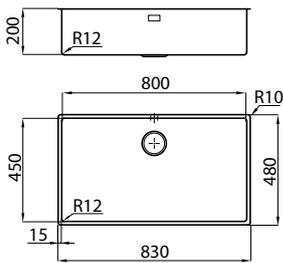	Features	Version	Ref.	Technical Drawing
Cabinet 90  <p style="text-align: right;">45 cm</p>	AISI 304 brushed bowl: 80x45 cm dimensions: 830x480 cut-out: see web site drain: 3½ Perimetric overflow		3143 850	

Accessories:
N5 O2 P2 S T2 Z Z2

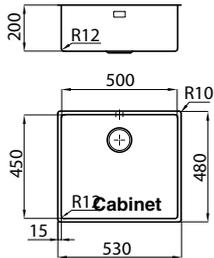Cabinet 60  <p style="text-align: right;">45 cm</p>	AISI 304 brushed bowl: 50x45 cm dimensions: 530x480 cut-out: see web site drain: 3½ Perimetric overflow		3141 850	
---	--	---	----------	---

Accessories:
N5 O2 P2 S T2 Z Z2

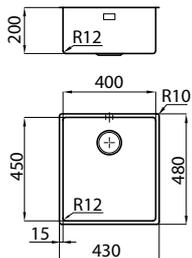Cabinet 45  <p style="text-align: right;">45 cm</p>	AISI 304 brushed bowl: 40x45 cm dimensions: 430x480 cut-out: see web site drain: 3½ Perimetric overflow		3139 850	
---	--	---	----------	---


Accessories:
N5 O2 P2 S T2 Z Z2

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.



Perimetric overflow




Accessories

 <p>N5 Multi-accessories support frame kit 28x47,4 with HDPE cutting board 8100 627</p>	 <p>O2 White plastic bowl 27,2x41,4 cm 8153 100</p>	 <p>P2 * Grating kit complete with ring support and food collection tray 8159 101</p>
 <p>S St. steel basket 40x40 8612 000</p> <p>White basket 40x40 8612 100</p>	 <p>T2 * St. steel dishes holder 21,4x37,9 cm 8100 303</p>	 <p>Z St. steel colander 25x36 cm 8154 000</p>
		 <p>Z2 * St. steel perforated pan 21,5x38 cm 8151 000</p>

*To use only with N5 kit

Serie 35 NEW

MORE ROOM IN THE COUNTERTOP

	Features	Version	Ref.	Technical Drawing
<p>Cabinet 80</p>  <p style="text-align: right;">35 cm</p>	<p>AISI 304 brushed bowl: 75x35 cm dimensions: 780x380 cut-out: see web site drain: 3½" Perimetric overflow</p>		<p>3137 850</p>	
<p>Accessories: B6 T6 O2</p> <p>Autom. waste fittings: PA PE PM PL PP PS (see pages 148-149)</p>				
<p>Cabinet 60</p>  <p style="text-align: right;">35 cm</p>	<p>AISI 304 brushed bowl: 50x35 cm dimensions: 530x380 cut-out: see web site drain: 3½" Perimetric overflow</p>		<p>3135 850</p>	
<p>Accessories: B6 T6 O2</p> <p>Autom. waste fittings: PA PE PM PL PP PS (see pages 148-149)</p>				
<p>Cabinet 45</p>  <p style="text-align: right;">35 cm</p>	<p>AISI 304 brushed bowl: 36,5x35 cm dimensions: 395x380 cut-out: see web site drain: 3½" Perimetric overflow</p>		<p>3136 850</p>	
<p>Accessories: B6 T6</p> <p>Autom. waste fittings: PA PE PM PL PP PS (see pages 148-149)</p>				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.



Perimetric overflow

The horizontal depth of the Serie 35 bowls perfectly matches the depth of the S4000 in-line induction hobs (see page 198-200)



Accessories



KE - R15

THE RIGHT MODEL FOR EVERY NEED



Perimetric overflow



Camillo
(8467 000 - page 169)



Lorenzo
(8466 000 - page 177)

suggested mixer taps




	Features	Version	Ref.	Technical Drawing
--	----------	---------	------	-------------------

Cabinet 100



AISI 304 brushed
bowl: **45x40/40x40 cm**
dimensions: 930x450
cut-out: see web site
drain: 3½

 **ST** 2207 850

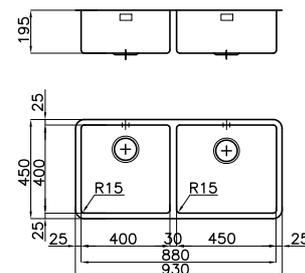

Accessories: (page 131)

L3 N2 N3 O2 P2 P4 S T T1 T2 Z Z2


Autom. waste fitting: **PA PE PM PL PP PS** (p.148)

Cabinet 90



AISI 304 brushed
bowl: **40x40/34x40 cm**
dimensions: 820x450
cut-out: see web site
drain: 3½

 **ST** 2206 850

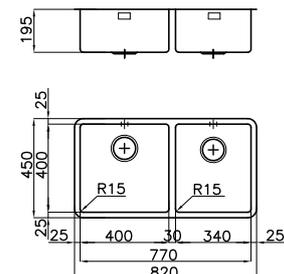






Accessories: (page 131)

L3 N2 N3 O2 P2 P4 S T T1 T2 Z Z2

Autom. waste fitting: **PA PE PM PL PP PS** (p.148)






Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

KE - R15

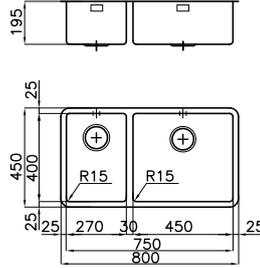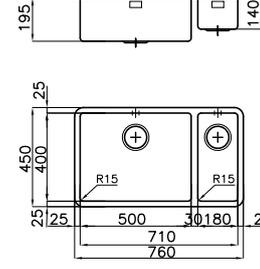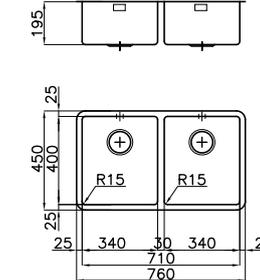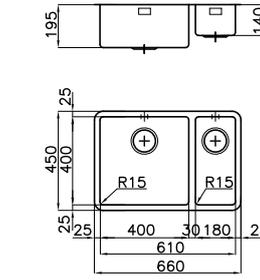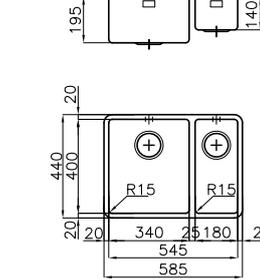	Features	Version	Ref.	Technical Drawing
<p>Cabinet 80</p>  <p>Accessories: (page 131) L3 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Autom. waste fitting: PA PE PM PL PP PS (p.148)</p>	<p>AISI 304 brushed bowl: 45x40/27x40 cm dimensions: 800x450 cut-out: see web site drain: 3½</p>	 <p>ST</p>	<p>2205 850</p>	
<p>Cabinet 80</p>  <p><i>Picture shows lh version</i></p> <p>Accessories: (page 131) L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Autom. waste fitting: PA PE PM PL PP PS (p.148)</p>	<p>AISI 304 brushed bowl: 50x40/18x40 cm dimensions: 760x450 cut-out: see web site drain: 3½</p>	 <p>ST</p>	<p>2204 851 rh 2204 852 lh</p>	
<p>Cabinet 80</p>  <p>Accessories: (page 131) L4 N2 N3 O2 P2 P4 R T1 T2 Z2 Autom. waste fitting: PA PE PM PL PP PS (p.148)</p>	<p>AISI 304 brushed bowl: (2x) 34x40 cm dimensions: 760x450 cut-out: see web site drain: 3½</p>	 <p>ST</p>	<p>2203 850</p>	
<p>Cabinet 80</p>  <p><i>Picture shows lh version</i></p> <p>Accessories: (page 131) L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Autom. waste fitting: PA PE PM PL PP PS (p.148)</p>	<p>AISI 304 brushed bowl: 40x40/18x40 cm dimensions: 660x450 cut-out: see web site drain: 3½</p>	 <p>ST</p>	<p>2202 851 rh 2202 852 lh</p>	
<p>Cabinet 60</p>  <p><i>Picture shows lh version</i></p> <p>Accessories: (page 131) L4 N2 N3 O2 P2 P4 R T1 T2 Z2 Autom. waste fitting: PA PE PM PL PP PS (p.148)</p>	<p>AISI 304 brushed bowl: 34x40/18x40 cm dimensions: 585x440 cut-out: see web site drain: 3½</p>	 <p>ST</p>	<p>2201 851 rh 2201 852 lh</p>	



Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

KE - R15

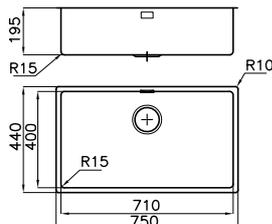	Features	Version	Ref.	Technical Drawing
	AISI 304 brushed bowl: 71x40 cm dimensions: 750x440 cut-out: see web site drain: 3½	 ST	2157 850	
		Vintage version  NEW	 ST	
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Autom. waste fitting: PA PE PM PL PP PS (p.148)				
	AISI 304 brushed bowl: 50x40 cm dimensions: 544x444 cut-out: see web site drain: 3½	 ST	2155 850	
		Vintage version  NEW	 ST	
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Autom. waste fitting: PA PE PM PL PP PS (p.148)				
	AISI 304 brushed bowl: 45x40 cm dimensions: 494x444 cut-out: see web site drain: 3½	 ST	2154 850	
		Vintage version  NEW	 ST	
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Autom. waste fitting: PA PE PM PL PP PS (p.148)				
	AISI 304 brushed bowl: 40x40 cm dimensions: 440x440 cut-out: see web site drain: 3½	 ST	2156 850	
		Vintage version  NEW	 ST	
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Autom. waste fitting: PA PE PM PL PP PS (p.148)				
	AISI 304 brushed bowl: 34x40 cm dimensions: 380x440 cut-out: see web site drain: 3½	 ST	2153 850	
		Vintage version  NEW	 ST	
Accessories: L4 N2 N3 O2 P2 P4 R T1 T2 Z2 Autom. waste fitting: PA PE PM PL PP PS (p.148)				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

KE - R15

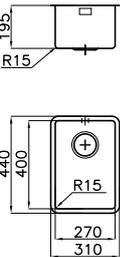	Features	Version	Ref.	Technical Drawing
Cabinet 40 	AISI 304 brushed bowl: 27x40 cm dimensions: 310x440 cut-out: see web site drain: 3½		2152 850	
Accessories: L4 N2 T1 Autom. waste fitting: PA PE PM PL PP PS (p.148)				
Cabinet 30 	AISI 304 brushed bowl: 18x40 cm dimensions: 222x442 cut-out: see web site drain: 3½		2151 850	
Autom. waste fitting: PA PE PM PL PP PS (p.148)				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Accessories

 <p>L3 Twin chopping board 41x41 cm 8644 004</p>	 <p>L4 Glass chopping board 23x41 cm 8631 300</p>	 <p>N2 HDPE chopping board 27,2x42,5 cm 8657 001</p>	 <p>N3 HDPE Twin chopping board 31,7x42,5 cm 8644 101</p>	 <p>O2 White plastic bowl 27,2x41,4 cm 8153 100</p>	 <p>P2 ** Grating kit complete with ring support and food collection tray 8159 101</p>
 <p>P4 Chopping board with stainless steel colander kit 8644 044</p>	 <p>R St. steel basket 34x40 cm 8611 000</p>	 <p>S St. steel basket 40x40 8612 000</p>	 <p>T * St. steel dishes holder 25x35 cm 8100 154</p>	 <p>White basket 40x40 8612 100</p>	
 <p>T1 St. steel dishes holder 25x42,5 cm 8100 201</p>	 <p>T2 ** St. steel dishes holder 21,4x37,9 cm 8100 303</p>	 <p>Z * St. steel colander 25x36 cm 8154 000</p>	 <p>Z2 ** St. steel perforated pan 21,5x38 cm 8151 000</p>		

*To use only with L3 chopping board **To use only with N3 chopping board

KE PVD & PVD Vintage





Perimetric overflow





Gun Metal, Gold, copper. The new KE Colour finishes are obtained with a special surface treatment (**Physical Vapour Deposition**) that gives AISI 304 stainless steel the fine colour and a subtle sheen in addition to very high physical and mechanical characteristics.

In particular, the treatment gives the steel a higher **resistance to corrosion**; it also increases the **surface hardness**, and therefore obtains a greater **resistance to scratches**; it reduces surface friction and **improves water flow** and **temperature resistance**.

KE Gun Metal

	Features	Version	Ref.	Technical Drawing
Cabinet 80 	AISI 304 Gun Metal bowl: 71x40 cm dimensions: 750x440 cut-out: see web site drain: 3½	 ST	2157 856	
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Autom. w. fitting: PG PO (page 148-149)	Vintage version  	 ST	2157 886	
Cabinet 60 	AISI 304 Gun Metal bowl: 50x40 cm dimensions: 544x444 cut-out: see web site drain: 3½	 ST	2155 856	
Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Autom. w. fitting: PG PO (page 148-149)	Vintage version  	 ST	2155 886	

KE Gun Metal

	Features	Version	Ref.	Technical Drawing
Cabinet 60  NEW Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Autom. w. fitting: PG PO (page 148-149)	AISI 304 Gun Metal bowl: 45x40 cm dimensions: 490x440 cut-out: see web site drain: 3½	 ST	2154 856	
Cabinet 45  Accessories: L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Autom. w. fitting: PG PO (page 148-149)	AISI 304 Gun Metal bowl: 40x40 cm dimensions: 440x440 cut-out: see web site drain: 3½	 ST	2156 856	
Cabinet 40  Accessories: L4 N2 N3 O2 P2 P4 R T1 T2 Z2 Autom. w. fitting: PG PO (page 148-149)	AISI 304 Gun Metal bowl: 34x40 cm dimensions: 380x440 cut-out: see web site drain: 3½	 ST	2153 856	
Cabinet 30  Autom. w. fitting: PG PO (page 148-149)	AISI 304 Gun Metal bowl: 18x40 cm dimensions: 222x442 cut-out: see web site drain: 3½	 ST	2151 856	

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Accessories




P4 R S p. 131

 PG Gun metal automatic drain 8407110	 Omega Gun Metal mixer taps page 181	 Skin Gun Metal mixer tap page 166	 Dispenser page 189
 L3 Twin chopping board 41x41 cm 8644 004	 L4 Glass chopping board 23x41 cm 8631 300	 N2 HDPE chopping board 27,2x42,5 cm 8657 001	 N3 HDPE Twin chopping board 31,7x42,5 cm 8644 101
 O2 White plastic bowl 27,2x41,4 cm 8153 100	 P2 ** Grating kit complete with ring support and food collection tray 8159 101	 P4 Chopping board with stainless steel colander kit 8644 044	 T * St. steel dishes holder 25x35 cm 8100 154
 T1 St. steel dishes holder 25x42,5 cm 8100 201	 T2 ** St. steel dishes holder 21,4x37,9 cm 8100 303	 Z * St. steel colander 25x36 cm 8154 000	 Z2 ** St. steel perforated pan 21,5x38 cm 8151 000

*To use only with L3 chopping board **To use only with N3 chopping board

KE Gold






	Features	Version	Ref.	Technical Drawing
Cabinet 80 	AISI 304 Gold bowl: 71x40 cm dimensions: 750x440 cut-out: see web site drain: 3½	 ST	2157 859	
	Vintage version  	 ST	2157 889	
Accessories (page 136): L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Automatic waste fittings: PD (see page 148)		Mixer Gold page 182		
Cabinet 60 	AISI 304 Gold bowl: 50x40 cm dimensions: 544x444 cut-out: see web site drain: 3½	 ST	2155 859	
	Vintage version  	 ST	2155 889	
Accessories (page 136): L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Automatic waste fittings: PD (see page 148)		Mixer Gold page 182		
Cabinet 45 	AISI 304 Gold bowl: 40x40 cm dimensions: 440x440 cut-out: see web site drain: 3½	 ST	2156 859	
	Vintage version  	 ST	2156 889	
Accessories (page 136): L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Automatic waste fittings: PD (see page 148)		Mixer Gold page 182		

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.


KE Copper




	Features	Version	Ref.	Technical Drawing
Cabinet 80 	AISI 304 Copper bowl: 71x40 cm dimensions: 750x440 cut-out: see web site drain: 3½	 ST	2157 858	
		Vintage version   ST	2157 888	
Accessories (page 136): L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Automatic waste fittings: PB (see page 148)		Mixer Copper page 182		
Cabinet 60 	AISI 304 Copper bowl: 50x40 cm dimensions: 544x444 cut-out: see web site drain: 3½	 ST	2155 858	
		Vintage version   ST	2155 888	
Accessories (page 136): L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Automatic waste fittings: PB (see page 148)		Mixer Copper page 182		
Cabinet 45 	AISI 304 Copper bowl: 40x40 cm dimensions: 440x440 cut-out: see web site drain: 3½	 ST	2156 858	
		Vintage version   ST	2156 888	
Accessories (page 136): L3 L4 N2 N3 O2 P2 P4 S T T1 T2 Z Z2 Automatic waste fittings: PB (see page 148)		Mixer Copper page 182		

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

S400

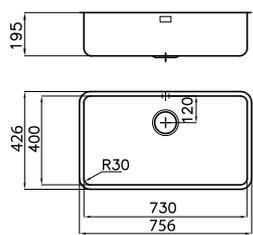	Features	Version	Ref.	Technical Drawing
<p>Cabinet 80</p> 	<p>AISI 304 brushed bowl: 73x40 cm dimensions: 756x426 cut-out: see web site drain: 3½"</p>		<p>1870 850</p>	
<p>Accessories: L3 N2 N3 O2 P2 P4 S T T1 T2 Z Z2</p> <p>Automatic waste fitting: PA PE PM PL PP PS (page 148-149)</p>				
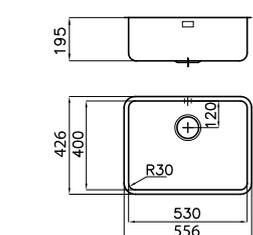
<p>Cabinet 60</p> 	<p>AISI 304 brushed bowl: 53x40 cm dimensions: 556x426 cut-out: see web site drain: 3½"</p>		<p>1865 850</p>	
<p>Accessories: L3 N2 N3 O2 P2 P4 S T T1 T2 Z Z2</p> <p>Automatic waste fitting: PA PE PM PL PP PS (page 148-149)</p>				





Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Accessories

 <p>A Chopping board 34x40 8647 000</p>			
 <p>E Chopping board 45x40 8655 000</p>	 <p>L3 Twin chopping board 41x41 cm 8644 004</p>	 <p>L4 Glass chopping board 23x41 cm 8631 300</p>	 <p>N2 HDPE chopping board 27,2x42,5 cm 8657 001</p>
 <p>N3 HDPE Twin chopping board 31,7x42,5 cm 8644 101</p>	 <p>O2 White plastic bowl 27,2x41,4 cm 8153 100</p>	 <p>P2 ** Grating kit complete with ring support and food collection tray 8159 101</p>	 <p>P4 Chopping board with stainless steel colander kit 8644 044</p>
 <p>R St. steel basket 34x40 cm 8611 000</p>	 <p>S St. steel basket 40x40 8612 000</p> <p>White basket 40x40 8612 100</p>	 <p>T * St. steel dishes holder 25x35 cm 8100 154</p>	 <p>T1 St. steel dishes holder 25x42,5 cm 8100 201</p>
 <p>T2 ** St. steel dishes holder 21,4x37,9 cm 8100 303</p>	 <p>T4 St. steel dishes holder 25x43 cm 8100 301</p>	 <p>Z * St. steel colander 25x36 cm 8154 000</p>	 <p>Z2 ** St. steel perforated pan 21,5x38 cm 8151 000</p>




*To use only with L3 chopping board **To use only with N3 chopping board

KS

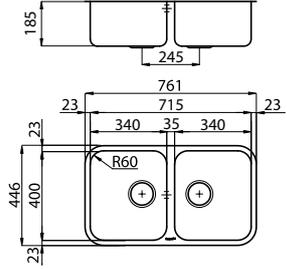
	Features	Version	Ref.	Technical Drawing
<p>Cabinet 80</p>  <p>NEW</p>	<p>AISI 304 brushed bowl: (2x) 34x40 cm dimensions: 761x446 cut-out: see web site drain: 3½"</p>	<p> ST</p>	<p>1303 860</p>	
<p>Accessories: A L4 N2 O2 R T1 Automatic waste fitting: PR PQ PC (page 148-149)</p>				
<p>Cabinet 60</p> 	<p>AISI 304 brushed bowl: 50x40 cm dimensions: 539x436 cut-out: see web site drain: 3½"</p>	<p> ST</p>	<p>1850 850</p>	
<p>Accessories: L4 N2 O2 S T1 Automatic waste fitting: PL PP PS PA PE PM (page 148-149)</p>				
<p>Cabinet 60</p> 	<p>AISI 304 brushed bowl: 45x40 cm dimensions: 488x438 cut-out: see web site drain: 3½"</p>	<p> ST</p>	<p>1845 850</p>	
<p>Accessories: L4 N2 O2 S T1 Automatic waste fitting: PL PP PS PA PE PM (page 148-149)</p>				
<p>Cabinet 45</p> 	<p>AISI 304 brushed bowl: 40x40 cm dimensions: 436x436 cut-out: see web site drain: 3½"</p>	<p> ST</p>	<p>1840 850</p>	
<p>Accessories: L4 N2 O2 S T1 Automatic waste fitting: PL PP PS PA PE PM (page 148-149)</p>				

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.


Big Bowl

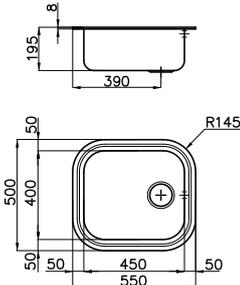	Features	Version	Ref.	Technical Drawing
Cabinet 60 	AISI 304 brushed bowl: 45x40 cm dimensions: 475x425 cut-out: see web site drain: 3½"		1811 050	
Accessories: L4 N2 S T4 Automatic waste fitting: PR PQ PC (page 148-149)				
Cabinet 30 	AISI 304 brushed bowl: 15x30 cm dimensions: 170x320 cut-out: see web site drain: 3½"		1300 068	
Automatic waste fitting: PR PQ PC (page 148-149)				
Cabinet 60 	AISI 304 brushed bowl: 45x40 cm dimensions: 550x500 cut-out: see web site drain: 3½"		1611 068	
available until exhaustion Accessories: E L4 N2 S Automatic waste fitting: PR PQ PC (page 148-149)				
<i>Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.</i>				

Circolari NEW

	Features	Version	Ref.	Technical Drawing
Cabinet 45 	AISI 304 brushed bowl: Ø 38 cm dimensions: Ø 425 cut-out: see web site drain: 3½"		1130 860	
Automatic waste fitting: PR PQ PC (page 148-149)				
<i>Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.</i>				


Elettra

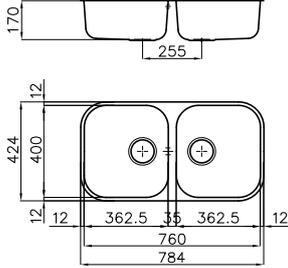	Features	Version	Ref.	Technical Drawing
Cabinet 80 	AISI 304 brushed bowls: (2x) 36x40 cm dimensions: 790x430 cut-out: see web site drain: 3½"	 ST	1974 860	

available until exhaustion

Accessories: **L4 N2 R T4 T1**

Automatic waste fitting: **PR PQ PC** (page 148-149)

Cabinet 45 	AISI 304 brushed bowl: 36x40 cm dimensions: 386,5x424 cut-out: see web site drain: 3½"	 ST	1970 860	
--	--	---	----------	---


available until exhaustion

Accessories: **L4 N2 R T4 T1**

Automatic waste fitting: **PR PQ PC** (page 148-149)

Standard fittings: fixing brackets, gasket (not available for under-mount sinks), waste fitting, overflow and siphon. Packing: single carton box.

Tornado

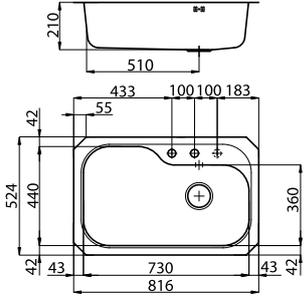	Features	Version	Ref.	Technical Drawing
Cabinet 80 	AISI 304 brushed bowl: 73x44 cm dimensions: 816x524 cut-out: see web site drain: automatic 3½"	 ST	1679 860	


Third tap hole available

Accessories: **H I L2 O Q T U Z**

Tornado's accessories



available until exhaustion

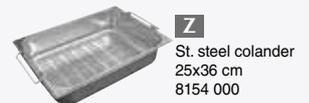

*to use only with L2 chopping board



Accessories and COMPLEMENTS



Washing Accessories
p. 142



Automatic waste fitting
and washing complements
p. 148



Waste-bins
p. 151



Electric socket-holder
p. 152



Sinks' Accessories

An ever richer set of Accessories characterizes the washing proposals. All models are accompanied by cutting boards, trays, drainer racks and colanders that enrich the aesthetics and functionality of the sink.

Twin chopping boards



The Twin chopping boards are much more than simple cutting boards. Combined with baskets and colanders, they become space-saving multifunction systems. In the photo, the L3 chopping board is coupled with the dish drainer grid (T) and the colander (Z).

Sinks' Accessories - modular sets

Space and time are increasingly precious elements in the kitchen.

This is why Foster has studied integrated Accessories' systems that optimize your every one movement, and occupy the bare minimum space when not used.

The large bowls ... multi-Accessoriesized



The Foster range is particularly rich in sinks with a large single bowl. From a functional point of view this is indeed the optimal solution: a single large basin that can hold dishes and objects of considerable size, equipped with trays, baskets and cutting boards that make the work area flexible and perfectly functional.

In the photo, the N2 cutting board is accompanied by the O2 tray and the T1 grid, to form a complete set of great elegance.

A multipurpose kit



The Twin N3 HDPE cutting board combines with the new P2 kit to house graters and the underlying containment tray. Other Accessories can be inserted in the outer ring of the cutting board, such as the dish drainer basket T2 or the colander tray Z2.

Sinks' Accessories

Wooden chopping board



A
Chopping board 34x40
8647 000



B6
Chopping board 26x36,6 cm
8643 117



E
Iroko chopping board 45x40 cm
8655 000



M
Sliding Iroko chopping board - 30x54 cm
8643 000



M2
Iroko chopping board 28x48 cm
8643 115



M4
Sliding Iroko chopping board - 44,4x33,7 cm
8656 001



L2
Twin Iroko chopping board 37x46 cm
8644 003
available until exhaustion



L3
Twin Iroko chopping board 41x41 cm
8644 004



P4 NEW
Chopping board 42x31,7 cm
with stainless steel colander kit
8644 044

HDPE chopping board and kit



N2
HDPE chopping board 27,2x42,5 cm
8657 001



N3
Twin HDPE chopping board 31,7x42,5 cm
8644 101



N4
HDPE chopping board 44,4x31,7 cm
8644 100

Sinks' Accessories



G
Iroko chopping board 40x40 cm
8646 000
available until exhaustion



H
Iroko chopping board 37x30 cm
8659 111



I
Iroko chopping board 37x46 cm
8659 112



M5
Sliding Iroko chopping board 33,2x38,4 cm
8659 113



M6
Walnut chopping board 18x44,8 cm
8642 000



M7
Walnut chopping board 15,8x42,4 cm
8642 003

Glass chopping board



P6
Basket + colander + chopping board kit
8100 151



L4
Glass chopping board 23x41 cm
8631 300



L5
Glass chopping board 29x54 cm
8633 300

Grids



N5 NEW
Multi-Accessories' support frame kit
(28x47.4) with HDPE cutting board
8100 627



P2 *
Grating kit complete
with ring support and food collection tray
8159 101



P3
Black grid 39,2x44,8 cm
8100 600


* to be coupled with chopping boards N and N4

Sinks' Accessories


Colanders




T**
Stainless steel dishes holder 25x35 cm
8100 154

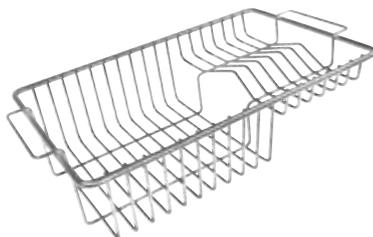

T1
Stainless steel dishes holder 25x42,5 cm
8100 201

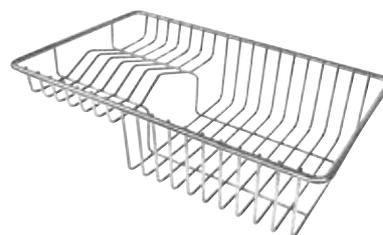


T2
Stainless steel dishes holder 21,4x37,9 cm
8100 303

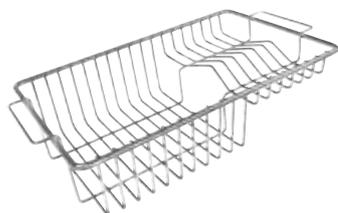

T6
Stainless steel dishes holder 23x37,5 cm
8100 305



T7
Dishes holder 23,8x46 cm
8100 051

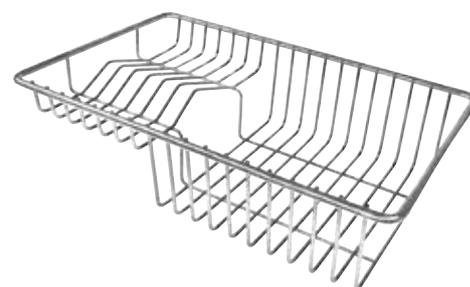

T8
Dishes holder 21,4x37,2 cm
8100 306


Colanders and baskets for bowls



O
White bowl 36x30 cm
8152 100



O2
White bowl 41,4x27,2 cm
8153 100

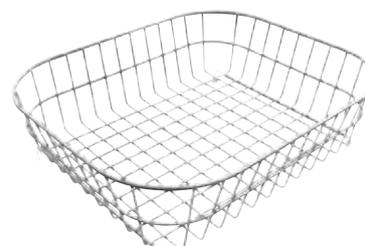

R
Stainless steel basket 34x40 cm
8611 000

Colanders



X
Stainless steel colander 17x32 cm
8154 043

NEW



Q
White colander 17x32 cm
8151 100




Z**
Stainless steel colander 25x36 cm
8154 000

** to be coupled with chopping boards L2 and L3.


Sinks' Accessories



T3
Stainless steel dishes holder 28x40 cm
8100 280

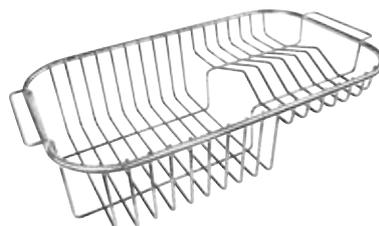

T4
Stainless steel dishes holder 25x43 cm
8100 301

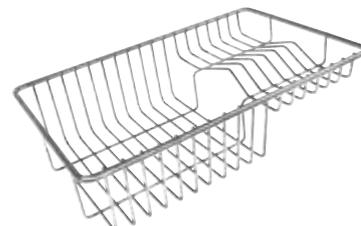


T5
Stainless steel dishes holder 21,4x33,1 cm
8100 304



U
Stainless steel dishes holder 25x45 cm
8100 111



U2
Stainless steel dishes holder 23x47 cm
8100 115

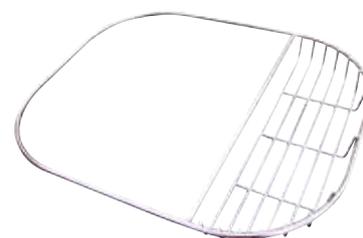

V
Stainless steel bowl holder 37x45 cm
8100 112



S
Stainless steel basket 40x40 cm
8612 000



S1
White basket 40x40 cm
8612 100



Z2
Stainless steel perforated pan 21,5x38 cm
8151 000



Z3
Stainless steel perforated pan 21,5x40 cm
8156 000

** to be coupled with chopping boards L2 and L3.

Complements

SPACE automatic waste fitting

PL




Space Light automatic waste fitting with electric remote control and warning light. With perimeter overflow. Space and basket caps supplied.

Ref.		
8407 117		

PP




Space Push automatic waste fitting with Push-button control and with perimeter overflow. Space and basket caps supplied.

Ref.		
8407 116		

PO




Space Push Gun Metal automatic waste fitting with Push-button control and with perimeter overflow. Space and Gun-metal-basket caps supplied.

Ref.		
8407 120		

PB

NEW




PVD Copper automatic waste-fitting with round push remote control and perimetric overflow. Supplied with double stopper: Space steel and "basket".

Ref.		
8407 122		

PD

NEW




PVD Gold automatic waste-fitting with round push remote control and perimetric overflow. Supplied with double stopper: Space steel and "basket".

Ref.		
8407 121		

PS




"Space Milano" automatic waste fitting with round rotating remote control and with perimeter overflow. Space and basket caps supplied.

Ref.		
8407 115		

PA




"Space" automatic waste fitting with squared rotating remote control and with perimeter overflow. Space and basket caps supplied.

Ref.		
8407 108		

PE




"Space" automatic waste fitting with round rotating remote control and with perimeter overflow. Space and basket caps supplied.

Ref.		
8407 109		

SPACE automatic waste fittings features



Designed for deep bowls, Space has a very small encumbrance. In the drawing the side view of the Space is shown. The height of the compact drain and the conformation of the siphon optimize the area under the sink leaving the necessary space for the needs of separate waste collecting.



The Space cap collects food residues in the flexible neoprene basket below, very easy to clean.



The new Space Light and Push automatic wastes are even more comfortable and allow the opening of the drain with a simple touch of the hand.



Complements

Automatic waste fitting


PM			<p>Automatic waste fitting with squared rotating remote control and with perimeter overflow</p>	<table border="1"> <tr> <td>Ref.</td> <td></td> <td></td> </tr> <tr> <td>8407 113</td> <td></td> <td></td> </tr> </table>	Ref.			8407 113		
Ref.										
8407 113										
PG			<p>Gun metal automatic waste fitting with round remote control and with perimeter overflow</p>	<table border="1"> <tr> <td>Ref.</td> <td></td> <td></td> </tr> <tr> <td>8407 110</td> <td></td> <td></td> </tr> </table>	Ref.			8407 110		
Ref.										
8407 110										
PR			<p>Automatic waste fitting with round remote control and with overflow</p>	<table border="1"> <tr> <td>Ref.</td> <td></td> <td></td> </tr> <tr> <td>8407 100</td> <td></td> <td></td> </tr> </table>	Ref.			8407 100		
Ref.										
8407 100										
			<p>Automatic waste fitting with round remote control and without overflow</p>	<table border="1"> <tr> <td>Ref.</td> <td></td> <td></td> </tr> <tr> <td>8407 000</td> <td></td> <td></td> </tr> </table>	Ref.			8407 000		
Ref.										
8407 000										
PQ			<p>Premium automatic waste fitting with squared remote control and with overflow</p>	<table border="1"> <tr> <td>Ref.</td> <td></td> <td></td> </tr> <tr> <td>8407 102</td> <td></td> <td></td> </tr> </table>	Ref.			8407 102		
Ref.										
8407 102										
PC			<p>Premium automatic waste fitting with cubic remote control (push-pull) and with overflow</p>	<table border="1"> <tr> <td>Ref.</td> <td></td> <td></td> </tr> <tr> <td>8407 103</td> <td></td> <td></td> </tr> </table>	Ref.			8407 103		
Ref.										
8407 103										

Notes on compatibility of automatic drains

Automatic drains are compatible with sinks that are supplied with at least one second hole (in addition to the tap hole).

For many sinks this is not a standard feature but it can be requested when ordering it. In the sinks drawings standard holes are shown with a continuous line, while positions for any holes on request are shown with a dashed line (see example below).

For undermount sinks the possibility of insertion of the automatic drain is always shown because the hole can be positioned on the worktop. It is also recommended to check the type of the overflow of the sink in order to choose a compatible automatic drain.

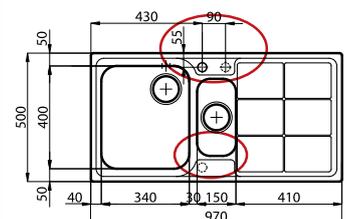

Second and third tap hole available

For installation on the worktop all the automatic waste fittings require hole Ø 35 mm.

Complements

3¹/₂ SPACE Waste fittings

	Ref.	Description
	8403 008	"Space" waste fitting without overflow
	8403 308	"Space" waste fitting with perimetric overflow
	8403 315	"Space" waste fittings with special overflow for CQ sink
	8669 012	Steel Space plug with silicone strainer, without hole (for use with automatic waste)
	8669 011	Steel Space plug with silicone strainer, with hole (for use with manual waste)

3¹/₂ Waste fittings

	Ref.	Description
	8403 000	Basket waste fitting without overflow
	8403 014	Satin basket waste fitting without overflow
	8403 303	Basket waste fitting with perimetric overflow
	8403 310	Basket waste fitting with perimetric overflow 3,5" Gun Metal
	8403 312	Basket waste fitting with perimetric overflow 3,5" Copper
	8403 311	Basket waste fitting with perimetric overflow 3,5" Gold
	8403 300	Basket waste fitting with overflow
	8407 200	Waste fitting for Uragno sink (overflow with flexible pipe)

3¹/₂ LIRA waste fittings

	Ref.	Description
	8403 001	LIRA Basket waste fitting without overflow
	8403 301	LIRA Basket waste fitting with overflow

2" Waste fittings

	Ref.	Description
	8401 000	2" waste fitting with overflow and rubber plug
	8402 000	One 2" waste fitting with overflow and one 2" waste fitting without overflow

1¹/₄ Waste fitting

	Ref.	Description
	8404 000	Overflow fitting 1 ¹ / ₄ for drainer

7" Waste fitting

	Ref.	Description
	8403 309	7" waste fitting with overflow and st. steel basket

Siphon

	Ref.	Description
	8410 000	One way siphon with dishwasher socket
	8415 000	Two ways siphon with dishwasher socket
	8435 000	Two way "Spazio" siphon with dishwasher socket
	8433 000	Three way "Spazio" siphon with dishwasher socket

LIRA Siphon

	Ref.	Description
	8435 001	LIRA* one way "Spazio" siphon with dishwasher socket
	8435 002	LIRA* two way "Spazio" siphon with dishwasher socket
	8435 003	LIRA* inspectable one way siphon with dishwasher socket

* we recommend combining LIRA siphons and waste fittings

Floor type siphons

Ref.	Description
8411 000	One way floor type siphon with dishwasher socket
8416 000	Two way floor type siphon with dishwasher socket

Various

Ref.	Description
8669 000	2" rubber plug
8669 018	Strainer plug for 3 ¹ / ₂ waste fitting
8669 019	Strainer plug for 3 ¹ / ₂ automatic waste fitting
8669 003	Strainer plug for Premium 3 ¹ / ₂ waste fitting
8669 004	Strainer plug for Premium 3 ¹ / ₂ automatic waste fitting
8155 000	Steel-clad plug 18/10 for waste bins Ref. 8113-8123
8700 007	Silicone gasket for inset sinks (4 and 8 mm)
8700 062	Silicone gasket for flat-edge and flush-mount inset sinks
8700 080	Fixing brackets adapter kit (18) to be used for worktops 20 mm *
8669 009	Short-type cover kit for perimetral overflow
8669 008	Long-type cover kit for perimetral overflow
8401 001	Extension pype for connection waste/overflow



Complements

Waste bins



Ref. | |
8143 000


Split 2
Waste bins System for waste separation
two extractable compartments 12 + 12 litres
Minimum cabinet: 30 cm
Colored lids for easy
compartments recognition

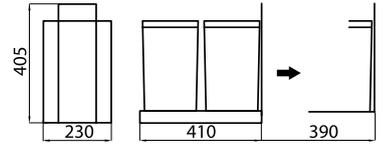

Ref. | |
8144 000

available until exhaustion


Split 4
Waste bins System for waste separation
with four bins 15 + 15 + 6 + 6 litres
For coffered cabinets 60 and 90 cm
Modular compartments, colored lids
for easy compartments recognition

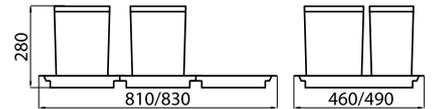

Ref. | |
8113 800


available until exhaustion

Patty one-way
One-way waste-basket with access from
the worktop (content 20 litres). Lid and
paneling in stainless-steel.

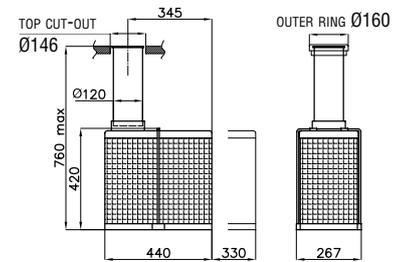

Ref. | |
8119 000

Patty top
Waste-basket with access from the
worktop; top-end extractable bag with
stainless-steel cover (content 13 litres)

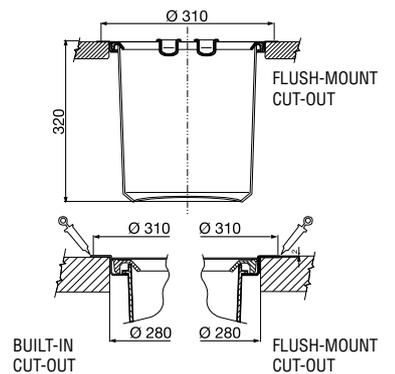



Complements


Socket-holder towers



Ref. _____
8000 016

Totem Q-inox
Extractable socket-holder tower
- 2 Schuko sockets
- 1 ITA 3 poles 10A-16A socket
- 1 USB port for charging
Power cable supplied
With Foster brushed stainless steel cap


Cut-out: 96x108 mm, R max 5 mm
Top thickness: max 50 mm

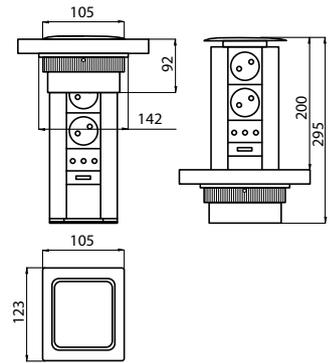

Ref. _____
8000 011

Totem4 inox
Extractable socket-holder tower
- 2 Schuko sockets
- 1 ITA 3 poles 10A-16A socket
- 1 USB port for charging
Power cable supplied
With brushed stainless steel cap


Cut-out: $\varnothing 102$ mm
Top thickness: max 50 mm

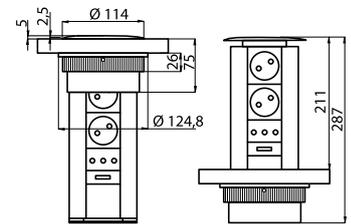

Ref. _____
8000 012

Totem3
Extractable socket-holder tower
- 2 Schuko sockets
- 1 ITA 3 poles 10A-16A socket
Power cable supplied
With gray varnished cap


Cut-out: $\varnothing 102$ mm
Top thickness: max 50 mm

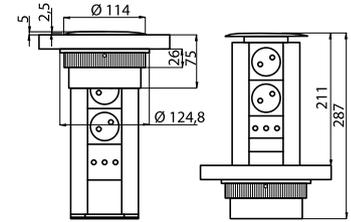

Ref. _____
8000 014

Casper
Extractable socket-holder tower
- 2 Schuko sockets
Power cable supplied

Cut-out: $\varnothing 80$ mm
Top thickness: max 60 mm



Ref. _____
8000 214

Kit for suspended installation




Complements

Built-in socket-holders



Finish	Ref.
Foster brushed	8000 010
Vintage	8000 117

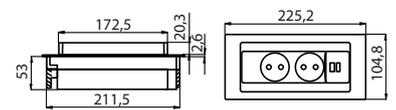


Reverse
Stainless steel push-push built-in socket-holder
 - 2 Schuko sockets - 1 USB port for charging

Cut-out: 215x88 mm



Finish	Ref.
Gun Metal	8000 116
Gold	8000 119
Copper	8000 118

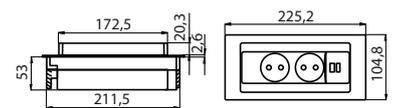

Reverse PVD
PVD Stainless steel push-push built-in socket-holder
 - 2 Schuko sockets - 1 USB port for charging

Cut-out: 215x88 mm


Complements



Ref. | |
8000 113

Filo3
Push-push built-in socket-holder slot
 - 2 Schuko sockets
 - 1 ITA 3 poles 10A-16A socket
 Power cable supplied


Cut-out: 195x157 mm
 Worktop max thickness: 40 mm (see the user manual for thickness more than 40 mm and for flush installation)

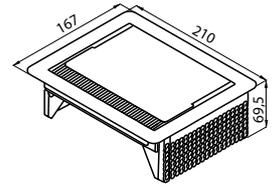

Ref. | |
8000 015

Cip
Built-in socket-holder slot
 - 1 Schuko socket
 Power cable supplied

Cut-out: Ø 56 mm



Accessories:

- 8000 215 white cover kit
- 8000 115 still finish cover kit
- 8000 315 black cover kit





NEW

Ref. | |
8000 017

Cip-Cip
Built-in socket-holder slot with sliding steel-gray cover
 - 2 Schuko socket
 Power cable supplied

Accessories:

- 8000 217 white cover kit
- 8000 317 black cover kit

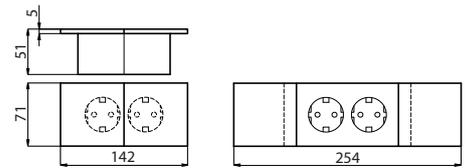



Foster 

MIXER TAPS

Tube p. 160		Master p. 172		Omega Copper p. 182	
GK p. 162		Gamma 3 vie p. 173		Delta p. 183	
Play p. 163		Eclipse NEW p. 174		Delta Plus p. 183	
Milanello p. 164		Flat NEW p. 175		KS p. 184	
Skin p. 165		Arsenio p. 175		NEW KS Plus p. 184	
Skin Gun Metal p. 166		KE p. 176		NEW KS Plus p. 184	
FL p. 167	NEW 	Gamma p. 176		Drop p. 185	
Magnum p. 168		Lorenzo p. 177		F2000 alto p. 185	
Camillo p. 169		Luisa p. 177		F2000 basso p. 186	
Flexo p. 169		Omega Plus p. 178		Beta p. 186	
1/2 Circle p. 170		Omega Plus Gun Metal p. 179		Bite p. 187	
NYC p. 170		Omega Plus Matt Black NEW p. 179		S1000 - Z65 p. 187	
Twix Plus p. 171		Omega p. 180		S1000 - Z85 p. 188	
Bert p. 171		Omega Gun Metal p. 181		S1000 - RO p. 188	
Tre alto p. 172		Omega Matt Black NEW p. 181		Dispenser p. 189	
		Omega Gold p. 182			


Special solutions



Eclipse, Drop, Arsenio and Flat are four **ideal "under-window" solutions**. The barrel can be easily lowered to reduce the height of the tap to just a few centimetres.




Magnum mixer tap is ideally **suited for a professional use**. The flexible hose makes it possible to reach every corner of the sink and the lever positioned directly on the shower makes it extra-easy to control the water flow.

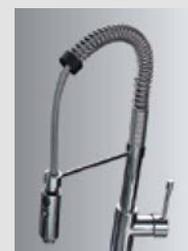

GK, Play, Tube, Milanello, Skin and FL offer a particular appealing aesthetic with their big arch. **The mixer shower can be tilted** and the waterflow directed where needed.



The **Gamma 3 Vie** mixer tap allows the distribution of cold/hot water and filtered water for alimentary use. This function is possible thanks to a third independent pipe that can be connected to any water-conditioning system.



A whole new look for the **Omega, Omega Plus and Skin** mixer taps, thanks to the physical PVD treatment (Physical Vapor Deposition). This technology uses precious metals to colour the steel surface and improves the resistance to scratches and wear and tear. The **Gun Metal, Gold and Copper** mixers are the natural complement of the KE bowls of the same colour.





Features

Foster offers a complete and varied collection of mixer taps both for their aesthetics and functional characteristics, and able to give added value to the wide range of sinks. The essential and modern design of squared proposals alternate with the more traditional models with soft and sinuous aesthetic. The remote controls and dispensers (see Sink Accessories section), reproduce perfectly the design of mixer taps, creating sets of high aesthetic value.

Quality materials

Foster mixer taps meet the strictest regulations. Certified materials with very low lead content and flexible ceramic cartridges tested at very high pressures provide high sturdiness, an always smooth and precise working and, most of all, full safety.



Inox AISI 316

Made in AISI 316 stainless steel, which guarantee a perfect resistance to corrosion and maximum hygiene and safety, even for food use water.



Double water flow

Several models are equipped with a switch to easily change the flow from continuous to shower.



Tap rotation

All the taps have a wide angle of rotation. Some models even permit a full 360° rotation.



Extractable shower head

The head of the tap is extractable, in order to easily reach any area of the sink.



Collapsible barrel


A feature that makes it possible to design the sink area in front of a window, thus being able to enjoy the natural light.



Strengthening plate

Foster's mixer taps are equipped with the strengthening plate that offers perfect stability on any sink.

Tube

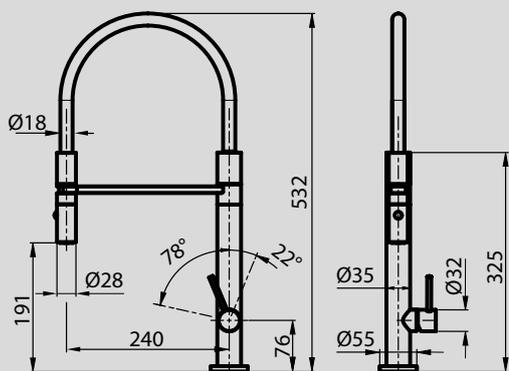

Single lever mixer tap with rotating barrel and flexible shower.
AISI 316 stainless steel.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 55 mm


rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.

8477 100
satin finish/
black



GK

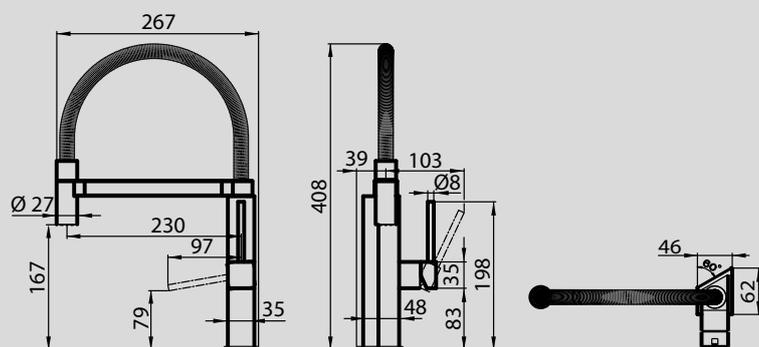

Warning:
The Cabinet of the GK tap has an irregular form. Please check the footprint



Single lever faucet with rotating barrel and flexible head.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: 62x46 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref. |
8488 000
chromed |
available until exhaustion

Play

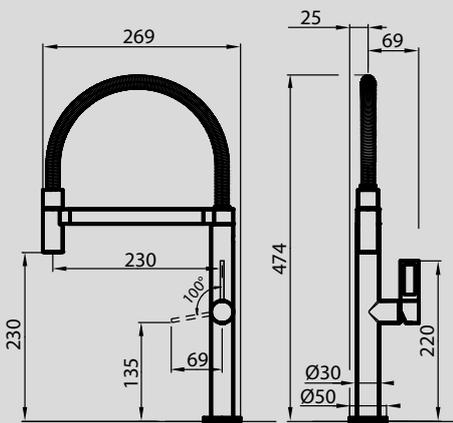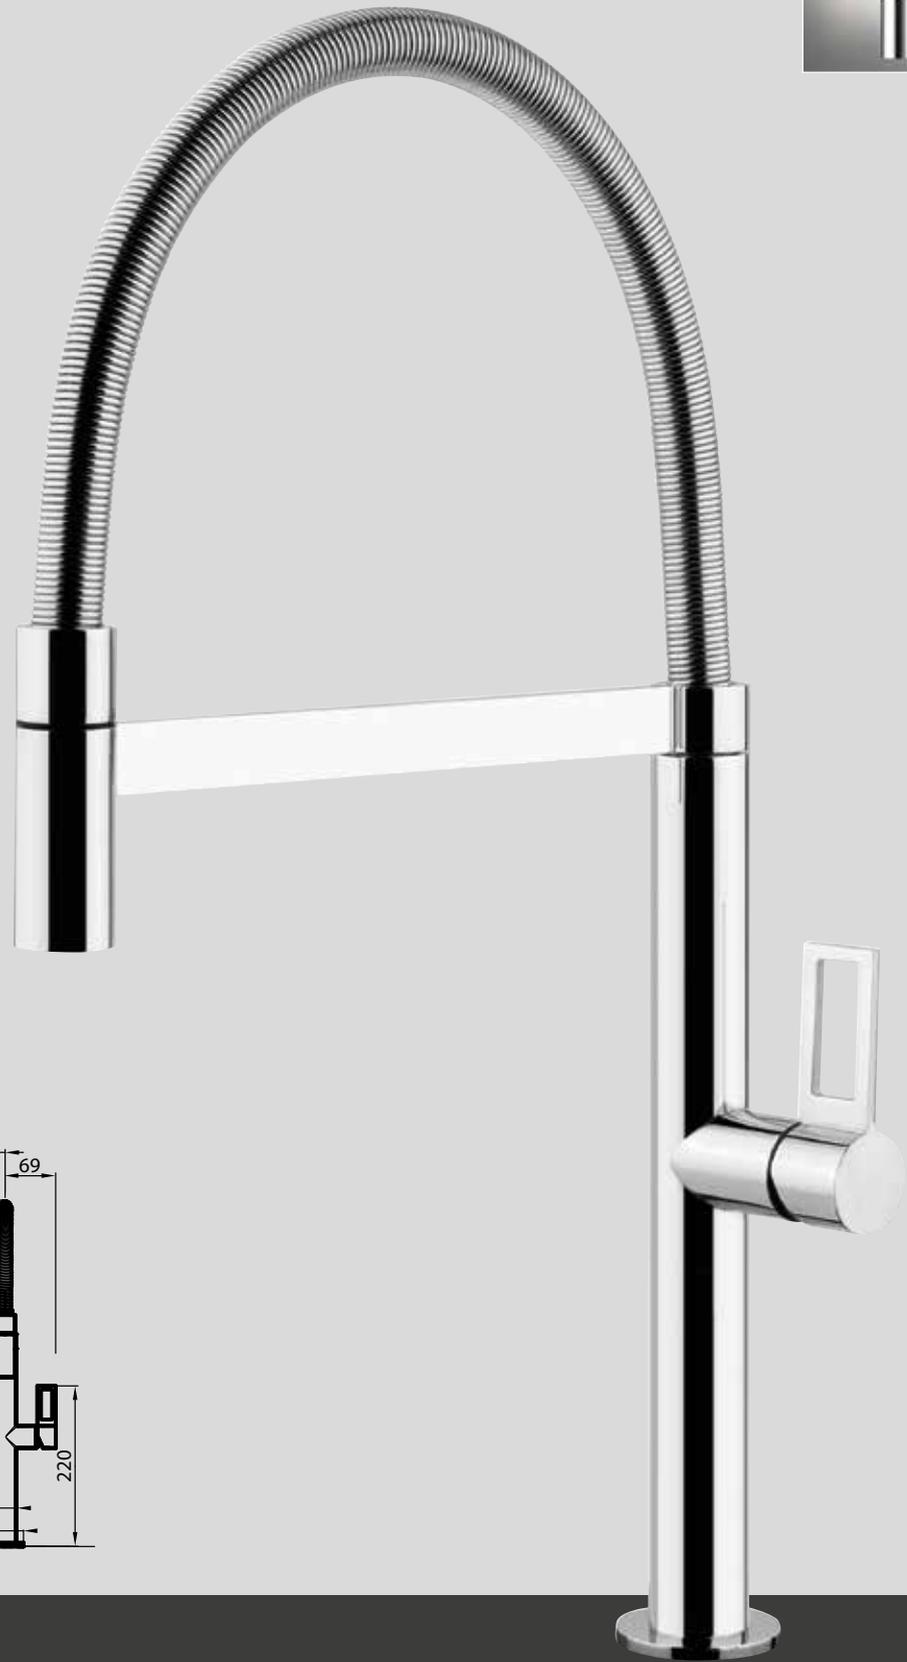

Single lever mixer tap with rotating and flexible barrel.


strengthening plate is included
 hole for tap's building-in: \varnothing 35 mm
 built-in base: \varnothing 50 mm

rotating angle: 360°
 ceramic disc cartridge
 max worktop thickness: 40 mm

Ref.

8487 000
 chromed

Milanello

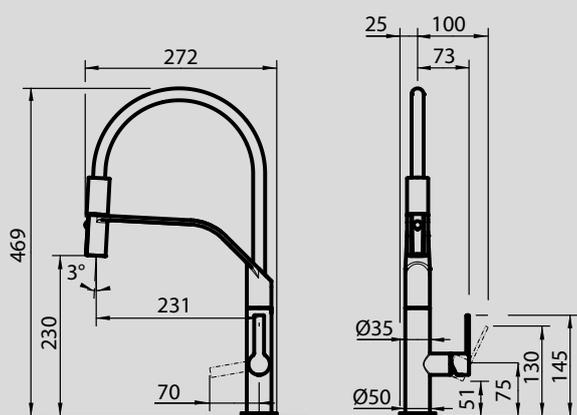

Single lever mixer tap with rotating barrel and movable shower, with stainless steel covering.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm



Ref.

8425 100
satin finish

Skin



Detail of the exclusive texture of the Skin mixer

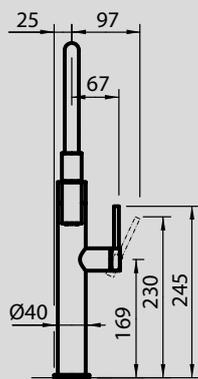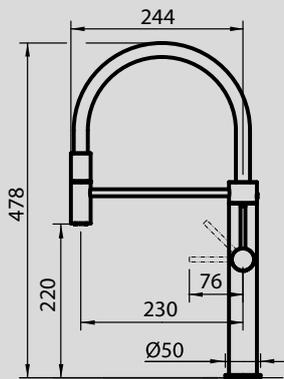

Single lever mixer tap with rotating barrel and movable shower.


Aesthetic parts in AISI 316
strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.

8424 100
satin finish

Skin Gun Metal

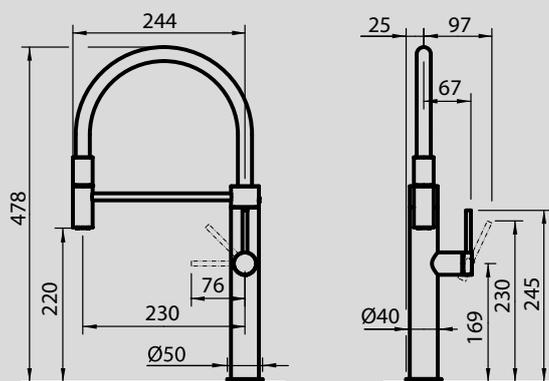

Single lever mixer tap with rotating barrel and movable shower.


Aesthetic parts in AISI 316
with PVD treatment
strengthening plate is included
hole for tap's building-in: \varnothing 35 mm

built-in base: \varnothing 50 mm
rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.

8424 856
Gun Metal
Satin finish

FL **NEW**

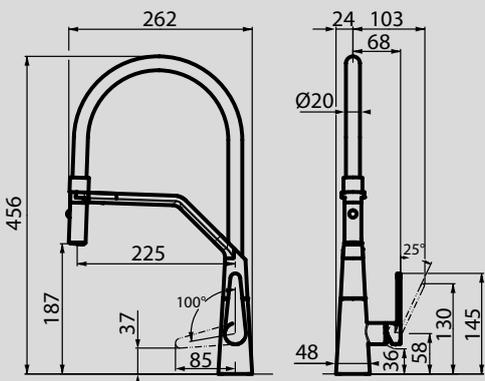

Single lever mixer tap with rotating barrel and movable shower.

Strengthening plate is included
Hole for tap's building-in: $\varnothing 35$ mm
built-in base: 48x48 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.
8521 000
chromed/
nero

Magnum



Single lever mixer tap with rotating barrel and movable shower.



strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 50 mm

Ref.

8484 000
chromed

Camillo

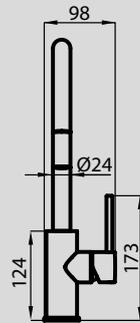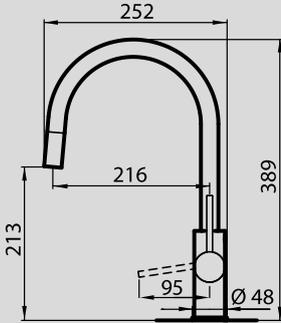



Single lever mixer tap with rotating barrel and extractable shower head.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 48 mm

rotating angle: 170°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.
8467 000 chromed
8467 100 satin finish

Flexo

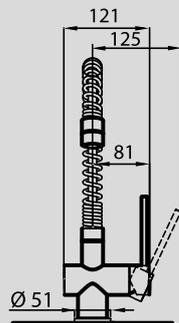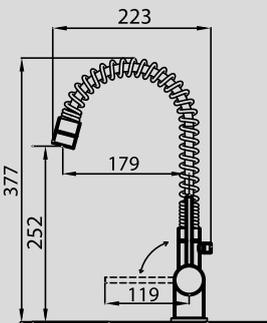


Single lever mixer tap with rotating barrel and flexible head.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 51 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.
8456 000 chromed
available until exhaustion

1/2 Circle

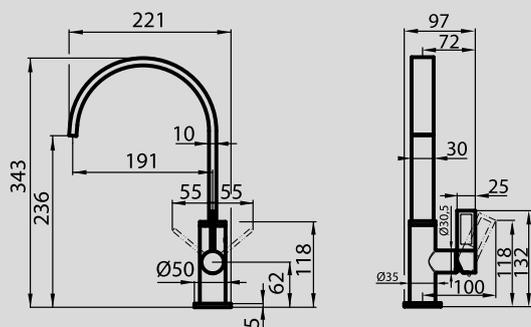


Single lever mixer tap with rotating barrel.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref. _____
8480 000
chromed

NYC

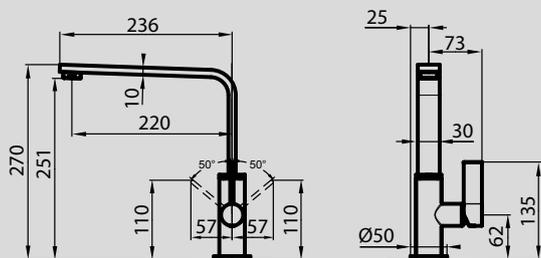


Single lever mixer tap with rotating barrel.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref. _____
8486 000
chromed

Twix Plus

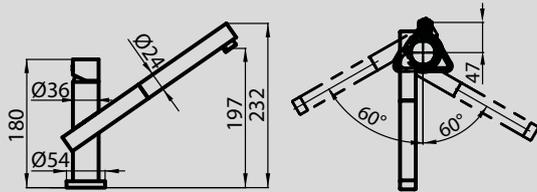


Single lever mixer tap with rotating barrel with extractable head.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 54 mm

rotating angle: 120°
ceramic disc cartridge
max worktop thickness: 50 mm

Ref. |
8427 020
chromed |
available until exhaustion

Bert

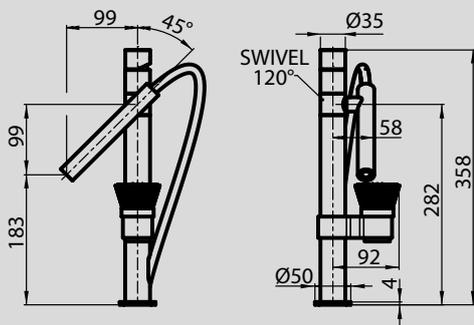


Single lever mixer tap with rotating barrel and extractable shower head.
AISI 316 stainless steel.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm
rotating angle: 120°

ceramic disc cartridge
max worktop thickness: 50 mm
Supplied with Hydrobrush

Ref. |
8428 100
satin finish |
available until exhaustion

Tre Alto

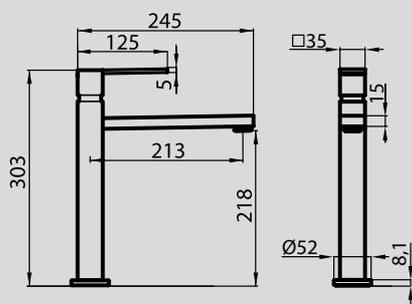

Single lever mixer tap with rotating barrel.

strengthening plate is included
hole for tap's building-in: $\varnothing 35$ mm
built-in base: $\varnothing 52$ mm



rotating angle: 120°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.

8468 000
chromed

available until exhaustion

Master

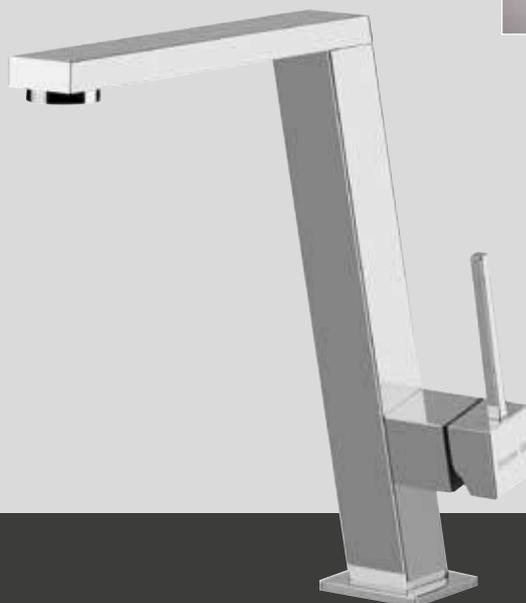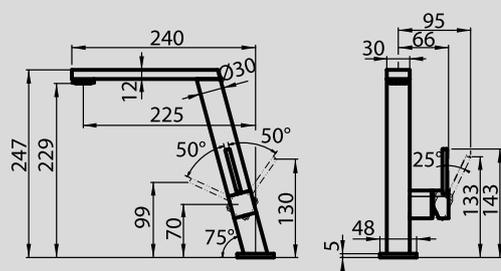

Single lever mixer tap with rotating barrel.

strengthening plate is included
hole for tap's building-in: $\varnothing 35$ mm
built-in base: 48x48 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm


Ref.

8493 000
chromed

available until exhaustion

Gamma 3 vie

AISI 316

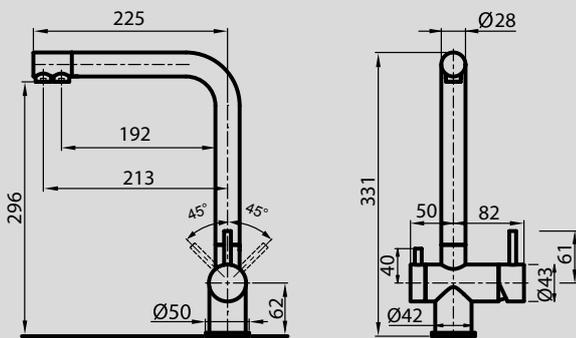

Three-way mixer tap with dual control and rotating barrel. The three-way system allows supply of hot/cold water and filtered water for alimentary use.

Mixer tap in AISI316 stainless steel, satin finish
strengthening plate is included
hole for tap's building-in: \varnothing 35 mm

built-in base: \varnothing 50 mm
rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 50 mm


Ref.

8496 100
satin finish

Eclipse NEW





collapsible mixer



minimal footprint



swivel head

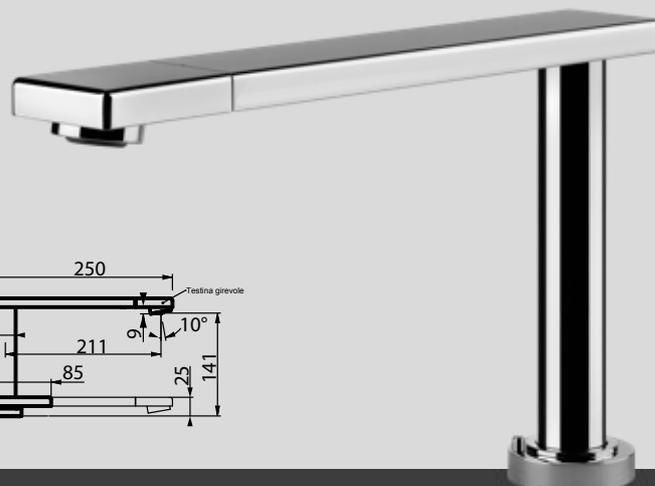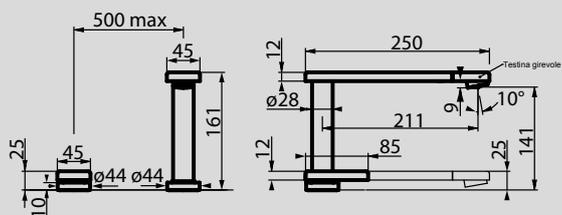

Collapsible single-lever mixer with swivel barrel and head.

ceramic disc cartridge
 max worktop thickness: 40mm
 maximum rear overall dimensions (command rotation) 40mm from the center of the hole.

barrel rotation 360° - head rotation 60°
 built-in base: $\varnothing 44$
 strenghtening plate is included
 Mixer tap cut-out $\varnothing 35$


Ref.

8499 000
 chromed

Mixer-Command wheelbase: with mixer on the left: min 260 / max 500 mm - with mixer on the right: min 300 / max 500 mm



Flat NEW

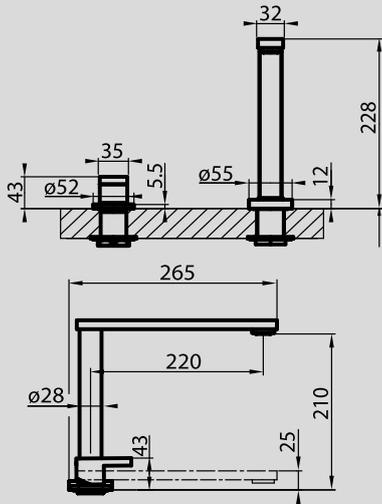

Single-lever mixer tap with rotating, collapsible barrel (Up&Down), with remote control.


strengthening plate is included
 hole for tap's building-in: \varnothing 35 mm
 double hole needed, distance between the holes:
 max 500 mm - min. 85 mm

built-in base: \varnothing 55 mm
 rotating angle: 360°
 ceramic disc cartridge
 max worktop thickness: 40 mm

Ref.

8478 001
 chromed

Arsenio

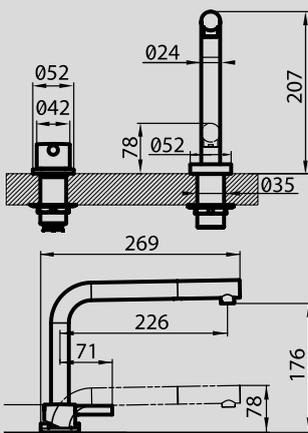

Single-lever mixer tap with rotating, collapsible barrel (Up&Down),
 with extractable head and remote control.



strengthening plate is included
 hole for tap's building-in: \varnothing 35 mm
 double hole needed, distance between the holes:
 max 500 mm - min. 85 mm

built-in base: \varnothing 52 mm
 rotating angle: 360°
 ceramic disc cartridge
 max worktop thickness: 40 mm

Ref.

8471 000
 chromed

KE

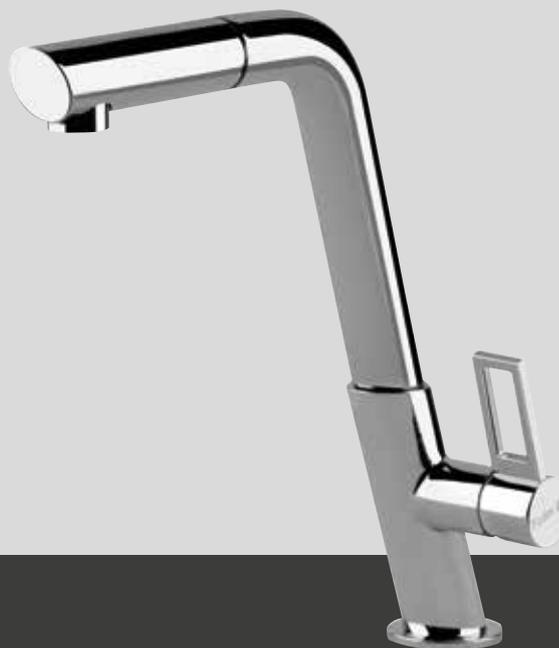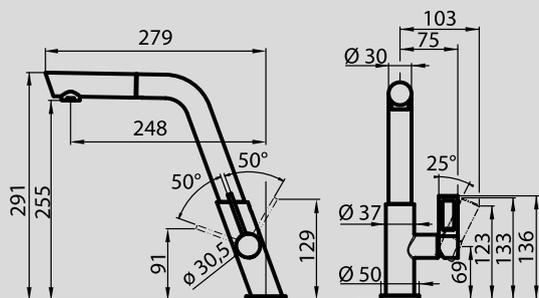

Single lever mixer tap with rotating barrel and extractable shower head.


strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.

8492 000
chromed

Gamma

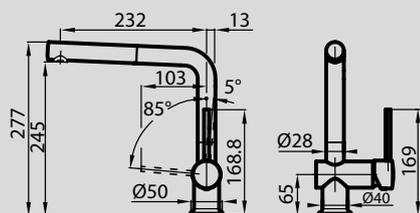

Single lever mixer tap with rotating barrel and extractable shower head.


strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm

rotating angle: 180°
ceramic disc cartridge
max worktop thickness: 30 mm

Ref.

8483 001
chromed

Lorenzo

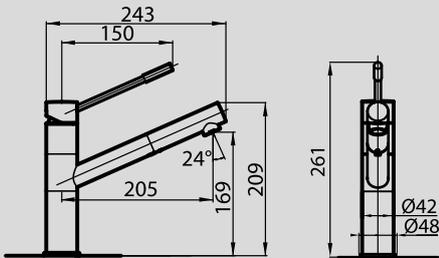


Single lever mixer tap with rotating barrel and extractable shower head.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 48 mm

rotating angle: 120°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.
8466 000
chromed
8466 100
satin finish

Luisa

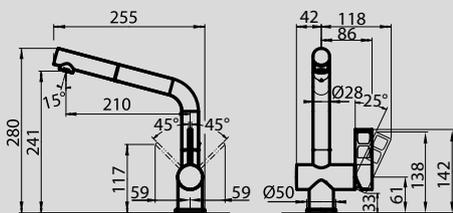



Single lever mixer tap with rotating barrel and extractable shower head.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.
8482 000
chromed
available until exhaustion

Omega Plus

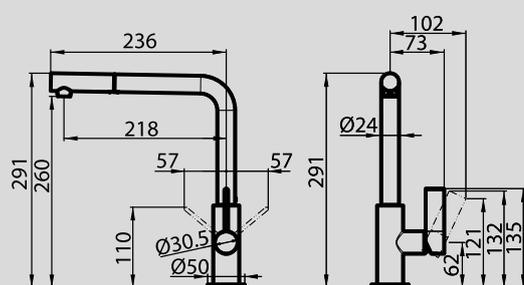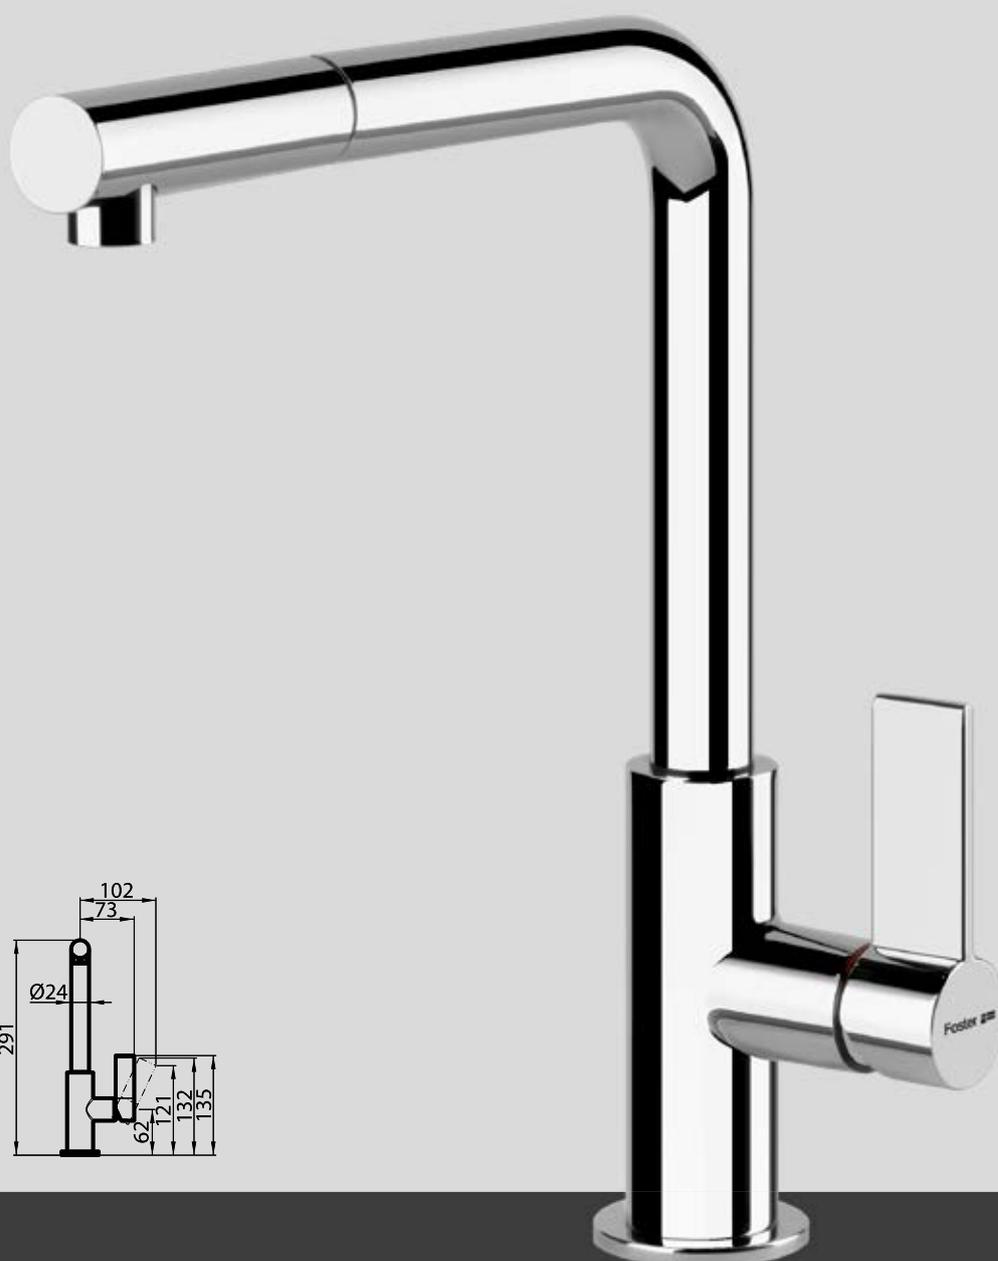

Single lever mixer tap with rotating barrel and extractable shower head.


strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.

8497 020
chromed

Omega Plus Gun metal

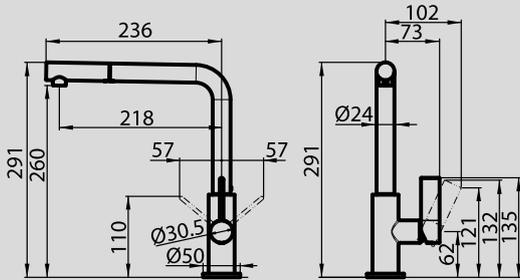

Single lever mixer tap with rotating barrel and extractable shower head.


strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.

8498 856
gun metal

Omega Plus Matt Black NEW

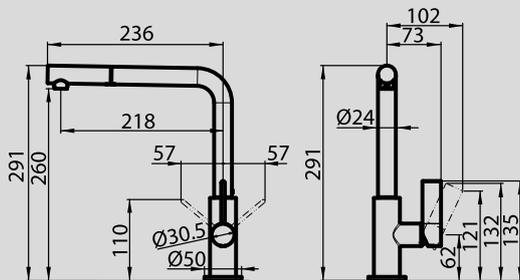

Single lever mixer tap with rotating barrel and extractable shower head.



strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.

8498 626
matt black

Omega

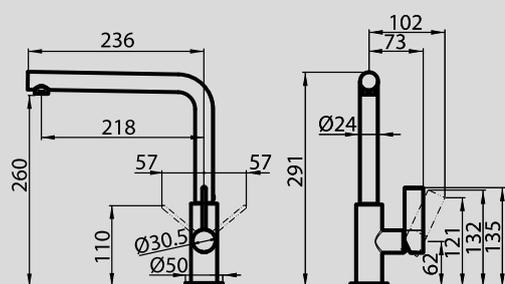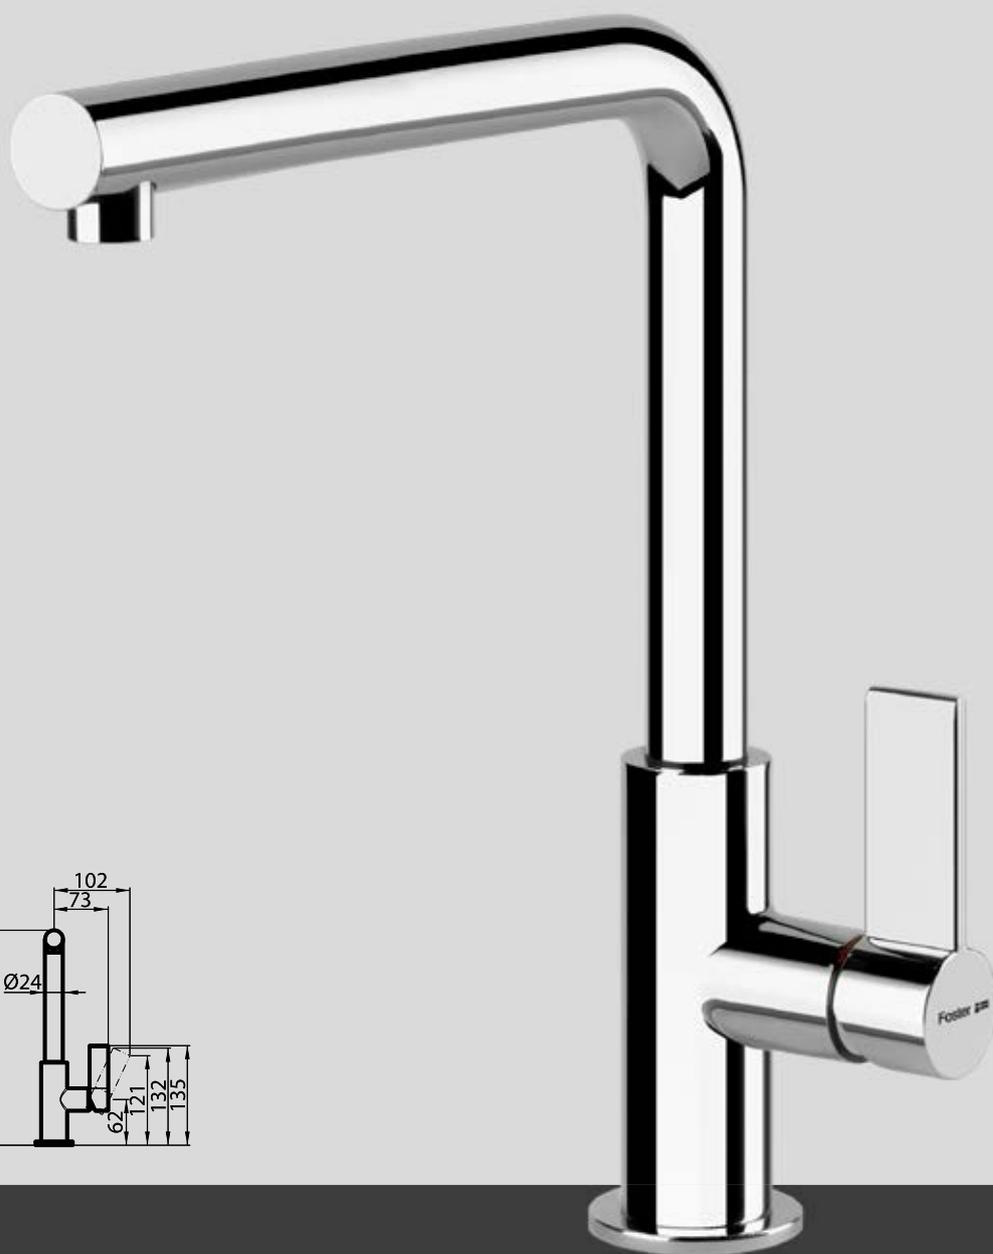

Single lever mixer tap with rotating barrel.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm


rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.

8497 000
chromed

NEW **8497 100**
satin finish

Omega Gun Metal

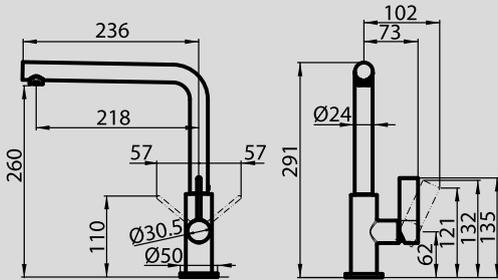

Single lever mixer tap with rotating barrel.


strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.

8497 856
gun metal

Omega Matt Black NEW

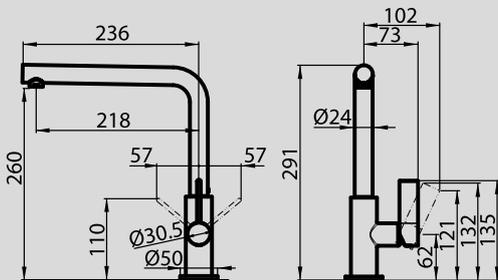

Single lever mixer tap with rotating barrel.


strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.

8497 606
matt black

Omega Gold

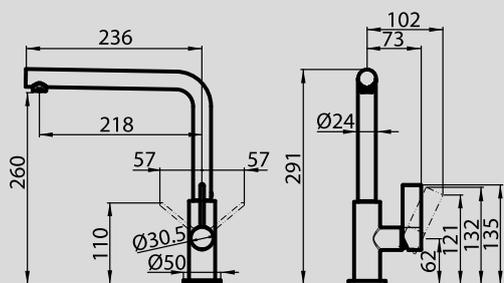


Single lever mixer tap with rotating barrel.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.
8497 700
gold

Omega Copper

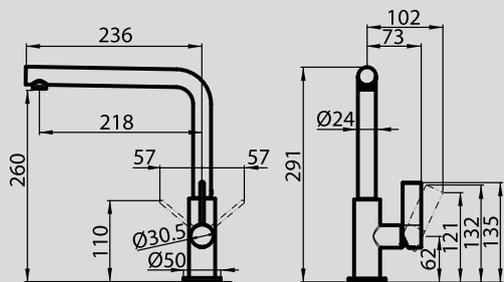


Single lever mixer tap with rotating barrel.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.
8497 400
copper

Delta

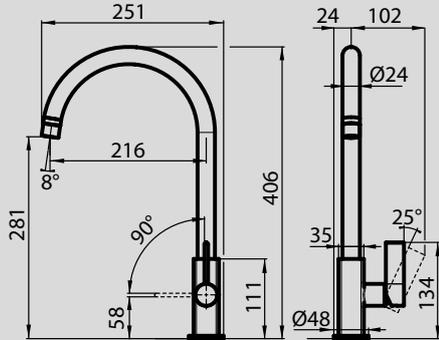


Single lever mixer tap with rotating barrel.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 48 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.
8441 000
chromed

Delta Plus

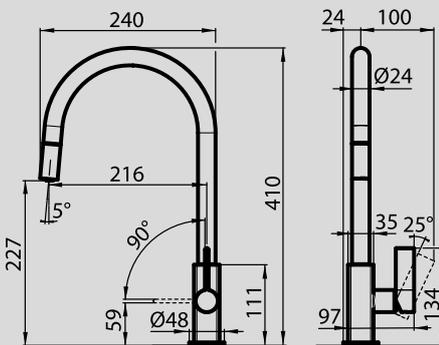


Single lever mixer tap with rotating barrel and extractable shower head.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 48 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.
8441 030
chromed

KS NEW

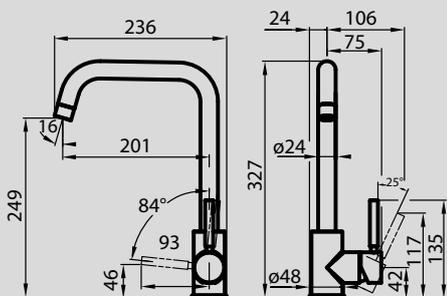



Single lever mixer tap with rotating barrel.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 48 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.
8485 002
chromed

KS Plus NEW

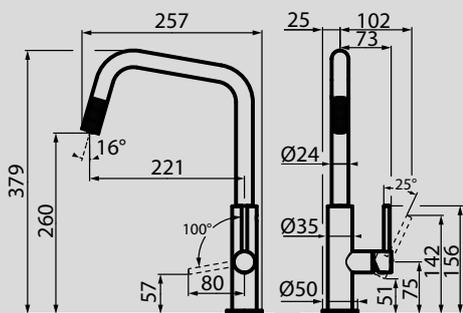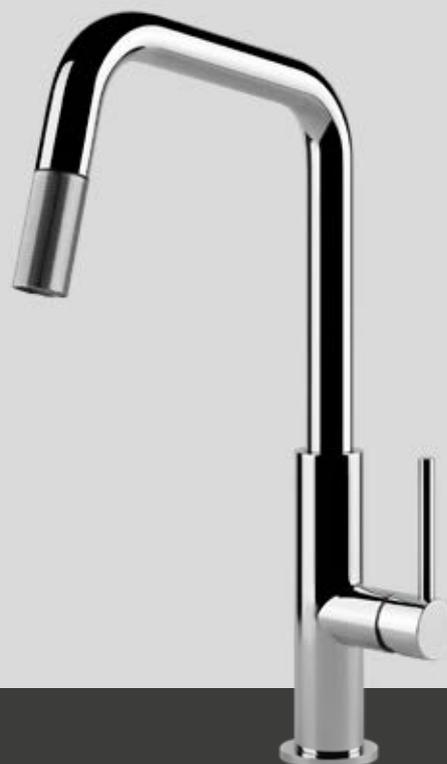

Single lever mixer tap with rotating barrel and extractable shower head.


Strengthening plate is included
Hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref.
8522 000
chromed

8522 100
satin finish

Drop NEW

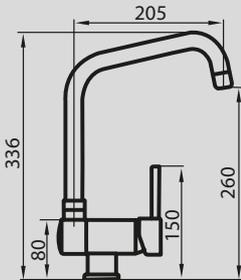


Single-lever mixer with swivel and collapsible spout

Strengthening plate is included
Hole for tap's building-in: $\varnothing 35$ mm
built-in base: $\varnothing 48$ mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 65 mm

Ref.
8523 000
chromed

F2000 - Alto

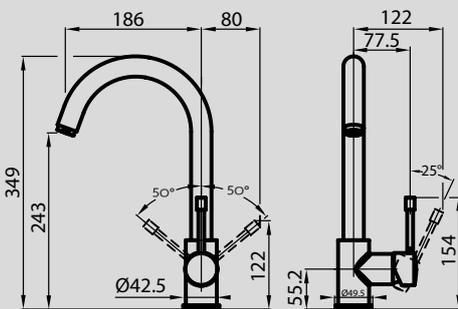


Single lever mixer tap with rotating barrel.

strengthening plate is included
hole for tap's building-in: $\varnothing 35$ mm
built-in base: $\varnothing 50$ mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 50 mm

Ref.
8458 000
chromed

F2000 - Basso

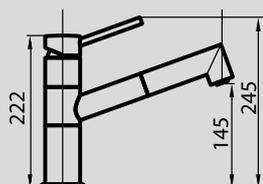


Single lever mixer tap with rotating barrel and extractable shower.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 60 mm

rotating angle: 180°
ceramic disc cartridge
max worktop thickness: 50 mm

Ref. |
8459 000
chromed |
available until exhaustion

Beta

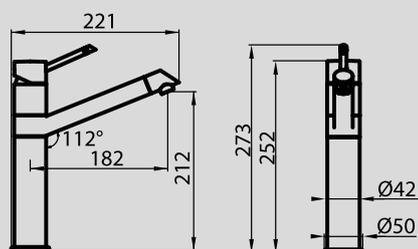


Single lever mixer tap with rotating barrel.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref. |
8490 000
chromed |

Bite

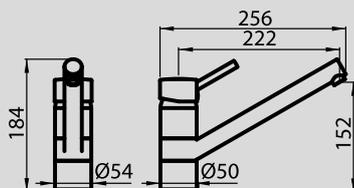


Single lever mixer tap with rotating barrel.

strengthening plate is included
 hole for tap's building-in: \varnothing 35 mm
 built-in base: \varnothing 54 mm
 rotating angle: 360°

ceramic disc cartridge
 max worktop thickness: 40 mm
 rear encumbrance
 of control leverage: 15 mm

Ref. |
8481 000
 chromed

S1000 - Z65

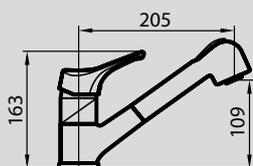


Single lever mixer tap with rotating barrel and extractable shower.

strengthening plate is included
 hole for tap's building-in: \varnothing 35 mm
 built-in base: \varnothing 55 mm

rotating angle: 180°
 ceramic disc cartridge
 max worktop thickness: 40 mm

Ref. |
8449 500
 chromed

S1000 - Z85

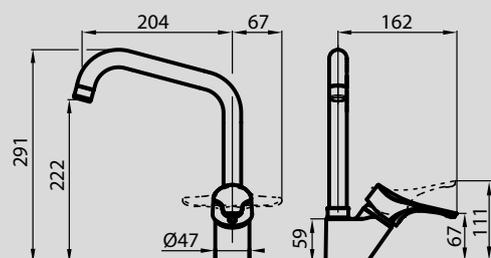


Single lever mixer tap with rotating barrel.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 48 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref. |
8442 500
chromed

S1000 - RO

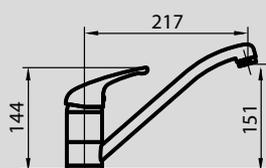

Single lever mixer tap with rotating barrel.

strengthening plate is included
hole for tap's building-in: \varnothing 35 mm
built-in base: \varnothing 50 mm

rotating angle: 360°
ceramic disc cartridge
max worktop thickness: 40 mm

Ref. |
8443 002
chromed




Dispenser




Quadra Dispenser
Chromed metal built-in liquid soap/detergent dispenser

Ref.
8520 000

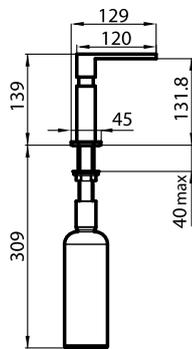

Round Dispenser
Chromed steel built-in liquid soap/detergent dispenser


Ref.
8530 000



Evo Dispenser
Built-in liquid soap/detergent dispenser


Ref.
8520 010
chromed

8520 100
satin finish

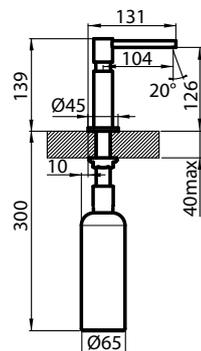

Evo Gun metal* Dispenser
Built-in liquid soap/detergent dispenser

Ref.
8520 856
gun metal

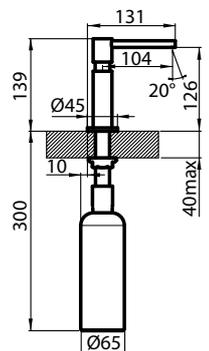

* Polished gun metal on chromed finish; it matches the Omega Gun Metal taps



Foster
INDUSTRIAL



∞ 4 + i + 0 4 +
- + - +
0 0 +

INDUCTION HOBS

Design within technology



Foster Milano Air
p. 196



S4000 Induction Bridge
p. 198



S4000 with Power Control
p. 199



S4000 Induction
p. 200



S4000 Domino
p. 201



KE Induction
p. 204



S1000 Induction
p. 206



Modular Induction
p. 208



Modular Quadra Induction
p. 212



Induction PRO
Pots collection
p. 195



The advantages of the induction technology



Control

Great versatility and accurate control are peculiar features of induction cooking. The nine possible power settings (with additional Powerboost options) offer a wide spectrum of possibilities, ranging from simple food heat maintenance to an incredible net available power compared to other cooking systems.

Security

The surface of the hob is heated only by pot contact and reaches no searing temperatures. Moreover, the simple act of removing the pot automatically shuts off the hob. The sophisticated electronics of Foster hobs completes their equipment in terms of security systems thanks to Pot Detector, Overflow Detector, Automatic Power-Off and Safety Lock.

Cleaning

The cooking area is activated only on the surface directly in contact with the saucepan; the rest of the cooking area remains cool, which means that over-spilled food will not burn and will not produce unpleasant deposits that are difficult to remove. Cleaning is so simple and fast and hygiene is perfect.

Energy saving



Thanks to its great speed in bringing the liquid to boil and its efficiency highly above all other cooking systems, induction involves a significant energy saving and represent **the most economical choice**.


Absorption examples for different types of cooking

cooking levels	power	kind of cooking	examples
1-2	50-130 W	very light	melt, bain-marie
3-4	150-300 W	light	warm, simmer
5-7	350-750 W	medium	sauces, rice
7-9	1.000-2.300 W	intense	roast meat, fry
Powerboost	1.400-3.000 W	time reduction	liquids boiling

The induction high power level leads us to believe in a great commitment of energy. By contrast, as can be seen in the table, most types of cooking require low power.


Built-in solutions

Induction and electric hobs can be installed either on the top or with the flush-mount method, by creating a recess in the worktop the same depth as the thickness of the glass.

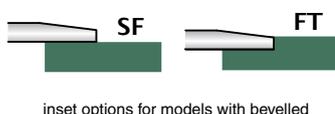

Bevelled edge

Special slanting edge (bevelled) that gives a clean and elegant finish with both the installation methods (flush-mount and top-mount) and perfectly matches the flat-edge sinks.

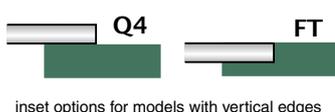

Vertical edge

The casing has a square edge that stands over the work surface by just 4 mm. The vertical ceramic-glass profile allows both top-mount and flush-mount installation.




New Bridge technology



Extended cooking area

The new hobs with Bridge function allow to associate two zones forming a single extended cooking zone for pots of large size, or for more than one cooking simultaneously, with maximum flexibility in pot positioning. With the additional Double Booster feature provided by all Bridge hobs, the exceptional 3700 W power can be concentrated on a single plate or made available uniformly over the enlarged area.

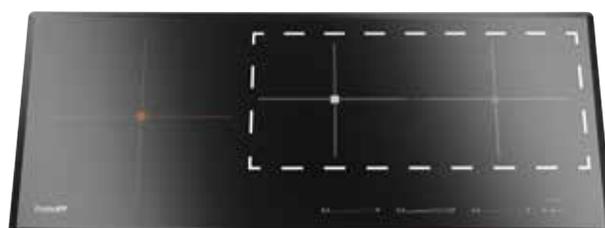

Features of Foster Bridge technology

The innovative rectangular shape of Bridge induction plates provides maximum efficiency over the entire cooking area. The possibility of dosing the entire power on individual plates or on the whole surface, allows the best performances both with pots of large and small size. Activation of the Bridge function is intuitive and straightforward: the entire area is then managed with a single Slider controls.

PowerControl



PowerControl function allows the use of induction technology also in case of household maximum power as low as 3 kW. The maximum power can indeed be self-limited to the desired level to a minimum of 2.8 kW. Once the maximum power is set, we can forget about the absorbed energy because Foster induction hob will give us a warning about possible limitations, allowing to choose how to allocate the available energy. The hob can be easily reprogrammed at any time to modify or remove the power limit.

The control of a real pro



T-chef

It is a function that allows to set particular temperatures (42 °C, 70 °C, 94 °C) and keep them constant during cooking. Elaborate preparations can be easily obtained, with chef-like results. Cooking in a bain-marie, without the aid of a double container for the water, custard or cream sauce will thus always be perfect. By setting the temperature close to boiling, liquids will immediately reach the requested temperature, increasing speed and performance.



Powerboost

Foster induction hobs are equipped with Booster function [P], which provides increased power to the selected plate. In particular, when the Booster is activated, the plate works for ten minutes at a very high power that allows to heat quickly large quantities of water.

Quantity	Without Powerboost	With Powerboost
3 litres	5 min.	3 min.
5 litres	8 min.	5 min.

Boiling timing with or without Powerboost



Slider control operation

The Slider control allows for extremely quick temperature setting: with a light touch of the finger you may select the desired power level on the TOUCH display.

Full Safety System

All electric cooker hobs feature the most modern and sophisticated safety protections: **Centralised power-off function**; Child-proof **safety lock**; **Residual heat warning lights**. Induction models feature the following functions: **Safety System** that turn off the hob in the absence of the pot; **Overflow detector** that automatically turns off the plate in case of liquid overflow; **Automatic deactivation** to prevent accidents caused by forgetfulness.

Pot Speed Test **NEW**

This feature tests your pots, grading them from 0 to 3 for efficiency and heating speed.

Pause

Useful function that allows you to distract your attention from cooking, interrupting and restoring the settings immediately.

Heat maintenance

Function that allows the food to be kept warm gently (70° C), without reaching boiling temperatures or risking to burn the sauce.

Intelligent Pot Localization **NEW**

This feature recognizes the cooking area onto which the pot is set, and activates the suitable commands to regulate its power.



Double Powerboost

On the new models with Bridge technology the Double Booster function is available: two further levels of power up to 3700 W, to be used on a single zone or distributed over the entire Bridge-extended area (where available).



End-of-cooking programming

All operations are programmed by means of the touch-control on the glass itself. Each cooking plate is capable of independent programming, and thus the possibility to set different cooking times.

Timer

On several models a further timer, independent from the end-of-cooking function, is available.

Pot detector

All induction cooker hobs detect the pot resting on them, but they also calculate the area they cover. This system allows the energy to be used even more efficiently. Moreover, the plates switch off automatically when the pot is removed.

Smart Fan System

Correct ventilation is essential for the induction hob to function in the best possible way. The Foster system automatically regulates the amount of ventilation to suit the temperatures reached.

GO & STOP

This device initially turns on the plates at maximum power until the selected temperature has been reached.

Automatic Bridge **NEW**

When a pot comes to rest onto two different cooking areas, this feature automatically activates the bridge function to unite them.

Recall

This feature allows you to call back the last settings selected in the previous cooking.

Induction PRO Pots collection

TOP PERFORMANCE FOR YOUR INDUCTION



Set of Induction PRO pots, 8 pcs



Ref.
8210 008

In 18/10 stainless steel
Triple bottom steel/aluminium /steel,
thermo-welding with Impact Bonding technology.
Professional handles with 6 welding spots
Washable in dishwasher

- 1 Pot Ø cm 24
- 1 Deep casserole Ø cm 20
- 1 Deep casserole Ø cm 24
- 1 Saucepan Ø cm 16
- 1 Pan Ø cm 24
- 1 Milkpot Ø cm 12
- 1 Glass lid Ø cm 20
- 1 Glass lid Ø cm 24

Induction PRO Wok pan with flat bottom



Ref.
8211 000

In 18/10 stainless steel - Ø 30 cm
Triple bottom steel/aluminium /steel,
thermo-welding with Impact Bonding technology.
Washable in dishwasher

Induction PRO steak-pan



Ref.
8212 000

in aluminium, Teflon coated DuPont Platinum plus
Aluminium-steel thermo-fused bottom - 30x30 cm
Bakelite handle
Washable in dishwasher

Foster Milano Air

FIRE AND AIR TOGETHER, IN A++ ENERGY CLASS

A++
CLASS



Six aspiring speeds

Six suction speeds and an airflow up to 680 mc/h guarantee a powerful and effective suction in all situations.



Overspilling water security

The containment bowl under the grid can contain up to 1,5 litres of overspilling.



Smooth surface

The hob is perfectly flush, even in the suction area. The whole space is available to slide the pots around in perfect safety.



Easy access to filters

The ergonomic shape of the grid allows easy access to clean the filters.



Double Bridge zone

Milano Air offers two ample extended cooking zones through Bridge function.




Intuitive control

The touch-control panel manages in an easy way both cooking and suction.

Foster Milano Air

Features | Version | Ref. | Technical Drawing



Flat-edge: 860x530 - cut-out: 810x500 mm
 Flush-mount: 860x530 - cut-out: see web site

Max power	3.000, 4.000, 7.400 W **
2 frontal plates	Ø 160 mm - 1.200 (1.600)* W
2 rear plates	Ø 200 mm - 2.300 (3.000)* W
2 extended Bridge zones	3.700 W

* Powerboost



power supply:
 single-phase 230V~1P+N
 two-phase 400V~2P+N
 frequency 50÷60 Hz

**with the PowerControl function, the maximum power can be set at any time among the following values

Induction cooker hob with integrated suction hood

Finish:
 Black glass ceramic

Induction features:
 electronic programming;
 double Bridge function;
 9 power setting per zone plus Powerboost function;
 touch controls; pot detector;
 security lock

Suction features:

Suction mode;
 Electronic programming;
 6 suction speeds
 (4+2 intensive modes);
 2 washable grease filters;
 automatic delayed shutdown;
 notice of grease and carbon filters' saturation; optional filtering mode with carbon filters
 Airflow rate: 680 m³/h - EBM Motor
Energy class: A++



Accessories:

- ref. 9700 529 - under-grille, regenerable carbon filter*
 - ref. 9700 539 - plinth mask
 - ref. 9700 574 - professional filter** for 100/150 mm high plinth
 - ref. 9700 575 - recharge for plinth filter
- elements of under-plinth canalisation not included – see page 271


* the carbon filter can be regenerated once by dishwashing it, thus redoubling its lifetime.

** The professional filter can be regenerated multiple times

Remark: canalization for air extraction and plinth masking grille for the kitchen plinth are available upon request.

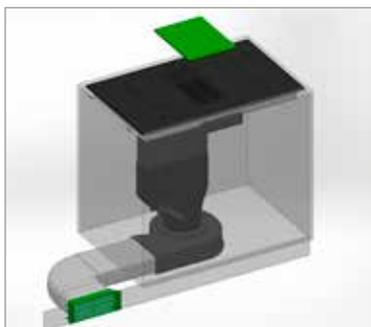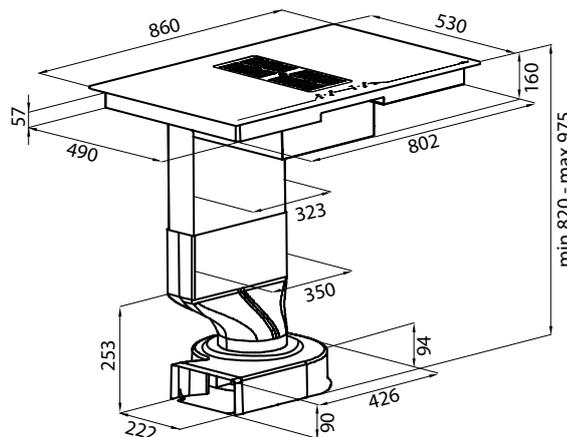

Filtering configuration with under-grille carbon filter (9700529) and plinth mask (9700539).

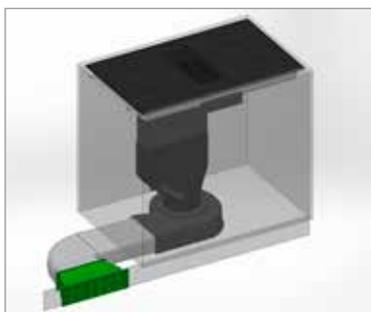

Filtering configuration with plinth filter (9700574).



Space saving


The installation of the Foster Milano Air hob is easy and flexible. The shape of the hood leaves ample space under the cabinet, allowing to install two spacious drawers. The motor, which is installed on the ground under the cabinet's floor, can be rotated in order to facilitate the air extraction in the suitable direction.

S4000 Induction Bridge

THE FUNCTIONALITY OF AN EXTENDED COOKING ZONE



Features	Version	Ref.	Technical Drawing
----------	---------	------	-------------------

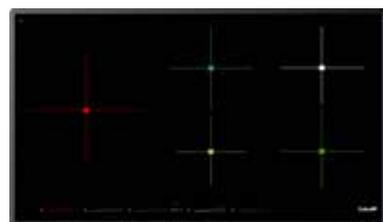

power supply:
single-phase 230V~1P+N
two-phase 400V~2P+N
frequency 50÷60 Hz

Induction cooker hob
Finish:
Black glass ceramic
electronic programming;
Bridge function;
9 power setting
per zone plus
Powerboost function;
touch controls;
slider controls;
T-Chef function;
go&stop device;
pause; recall;
independent timer;
security lock




7390 245

Max power 11.100 W**
left Ø 260 mm-2.600 (3.700)* W
sup. center Ø 180 mm-1.850 (3.000)* W
inf. center Ø 145 mm-1.400 (2.200)* W
right: 2x220x180 mm-2.100 (3.700)* W

* Powerboost



Flat-edge: 900x520 - cut-out: 880x490
Flush-mount: 900x520 - cut-out: see web site

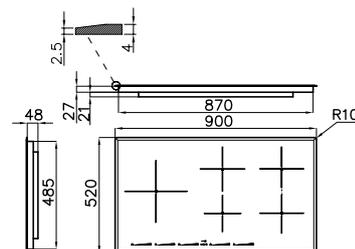

**The correct functioning of the hob requires a power supply of at least 7 kW.



power supply:
single-phase 230V~1P+N
two-phase 400V~2P+N
frequency 50÷60 Hz

Induction cooker hob
Finish:
Black glass ceramic
electronic programming;
Bridge function;
9 power setting
per zone plus
Powerboost function;
touch controls;
slider controls;
T-Chef function;
go&stop device;
pause; recall;
independent timer;
security lock




7334 245

Max power 7.400 W
left 180x220 mm-2.100 (3.700)* W
center left 180x220 mm-2.100 (3.700)* W
center right 180x220 mm-2.100 (3.700)* W
right 180x220 mm-2.100 (3.700)* W

* Powerboost



Flat-edge: 900x400 - cut-out: 870x370
Flush-mount: 900x400 - cut-out: see web site

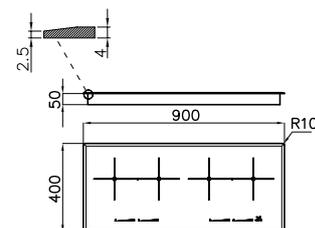

available until exhaustion

power supply:
single-phase 230V~1P+N
two-phase 400V~2P+N
frequency 50÷60 Hz

Induction cooker hob
Finish:
Black glass ceramic
electronic programming;
9 power setting
per zone plus double
Powerboost function;
Pot Speed Test; touch
controls; Intelligent Pot
Localization; Automatic
Bridge; slider controls;
T-Chef function;
go&stop device;
pause; recall;
independent timer;
security lock




7330 255

Max power 7.400 W
left Ø 260 mm-2.600 (3.600)* (3.700)** W
center 180x220 mm-2.100 (2.600)* (3.700)** W
right 180x220 mm-2.100 (2.600)* (3.700)** W

* Powerboost - **Double Powerboost



Flat-edge: 840x350 - cut-out: 810x330
Flush-mount: 840x350 - cut-out: see web site

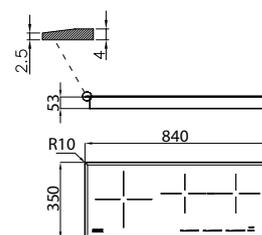

S4000 Induction with Power Control

PERFORMANCE WITH CONTROLLED POWER



Features | Version | Ref. | Technical Drawing




power supply:
single-phase 230V~1P+N
two-phase 400V~2P+N
frequency 50±60 Hz

Induction cooker hob

Finish:
Black glass ceramic

PowerControl function
electronic
programming;
slider controls;
touch controls;
pause;
security lock




7330 241


Max power 6.600 W**
left Ø 240 mm-2.200 (3.000)* W
center Ø 145 mm-1.200 (1.600)* W
right Ø 210 mm-1.500 (2.000)* W
* Powerboost



Flat-edge: **840x350** - cut-out: **810x330**
Flush-mount: **840x350** - cut-out: see web site

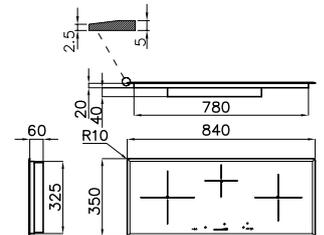

**thanks to PowerControl function, the max power can be selected among the following values: 2.800 W, 3.500 W, 6.000 W, 6.600 W




available until exhaustion

power supply:
single-phase 230V~1P+N
two-phase 400V~2P+N
frequency 50±60 Hz

Induction cooker hob

Finish:
Black glass ceramic

PowerControl function
electronic
programming;
9 power setting
per zone plus
Powerboost function;
touch controls;
pause;
security lock




7372 241

Max power 2.800, 3.500, 6.000, 7.200 W**
left Ø 210 mm-1.500 (2.000)* W
left sup. Ø 145 mm-1.200 (1.600)* W
right Ø 145 mm-1.200 (1.600)* W
right sup. Ø 210 mm-1.500 (2.000)* W
* Powerboost



Flat-edge: **590x520** - cut-out: **560x490**
Flush-mount: **590x520** - cut-out: see web site

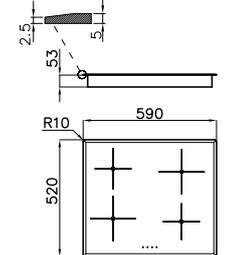

**thanks to PowerControl function, the max power can be selected among the following values: 2.800 W, 3.500 W, 6.000 W, 7.200 W

S4000 Induction

STYLE ICON



Features	Version	Ref.	Technical Drawing
----------	---------	------	-------------------



Induction cooker hob



7334 240

Finish:
Black glass ceramic

electronic programming;
9 power setting per zone plus
double Powerboost;
touch controls;
independent timer;
security lock

Max power


7.400 W

- left Ø 210 mm-2.050 (2.500)* (3.700)** W
- center left Ø 210 mm-2.050 (2.500)* (3.700)** W
- center right Ø 180 mm-1.850 (2.300)* (3.000)** W
- right Ø 180 mm-1.850 (2.300)* (3.000)** W


* Powerboost - **Double Powerboost



Flat-edge: **1100x350** - cut-out: **1065x325**
Flush-mount: **1100x350** - cut-out: see web site

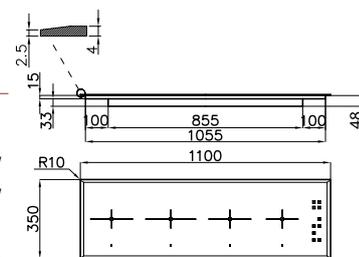

power supply:
single-phase 230V~1P+N
two-phase 400V~2P+N
frequency 50÷60 Hz

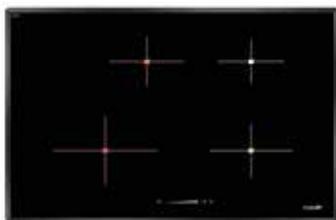

available until exhaustion

Induction cooker hob



7332 240

Finish:
Black glass ceramic
electronic programming;
9 power setting per zone plus
Powerboost function;
touch controls;
Slider controls;
go&stop device;
pause; recall;
temperature maintenance;
independent timer;
security lock

Max power


7.400 W

- left Ø 250 mm-2.300 (3.000)* W
- center Ø 180 mm-1.200 (1.400)* W
- right Ø 220 mm-2.300 (3.000)* W
- right sup. Ø 160 mm-1.200 (1.400)* W

* Powerboost



Flat-edge: **800x520** - cut-out: **650x490**
Flush-mount: **800x520** - cut-out: see web site





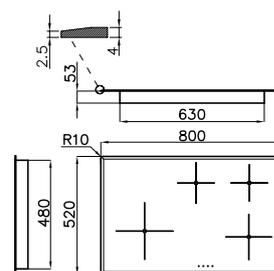


power supply:
single-phase 230V~1P+N
two-phase 400V~2P+N
frequency 50÷60 Hz

S4000 Domino


A TAILORED COOKING ZONE

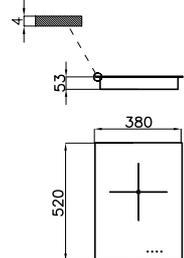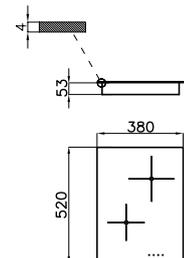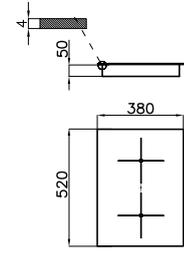

	Features	Version	Ref.		Technical Drawing
 <p>power supply: single-phase 230V-1P+N frequency 50÷60 Hz</p>	<p>Induction cooker hob</p> <p>Finish: Black glass ceramic</p> <p>electronic programming; 9 power setting per zone plus Powerboost function; touch controls; independent timer; security lock</p> <p>Accessories: spacer (see page 203)</p>	<p>Q4 FT</p>	<p>7321 240</p>	<p>Max power 3.000 W</p> <p>cooking zone Ø 250 mm-2.300 (3.000)* W</p> <p>* Powerboost</p> <p></p>	<p>Q4: 380x520 - cut-out: 350x490 Flush-mount: 380x520 - cut-out: see web site</p> 
 <p>power supply: single-phase 230V-1P+N frequency 50÷60 Hz</p>	<p>Induction cooker hob</p> <p>Finish: Black glass ceramic</p> <p>electronic programming; 9 power setting per zone plus Powerboost function; touch controls; independent timer; security lock</p> <p>Accessories: spacer (see page 203)</p>	<p>Q4 FT</p>	<p>7322 240</p>	<p>Max power 3.700 W</p> <p>superior Ø 200 mm-2.300 (3.000)* W bottom Ø 160 mm-1.200 (1.400)* W</p> <p>* Powerboost</p> <p></p>	<p>Q4: 380x520 - cut-out: 350x490 Flush-mount: 380x520 - cut-out: see web site</p> 
 <p>NEW</p>  <p>power supply: single-phase 230V-1P+N frequency 50÷60 Hz</p>	<p>Induction cooker hob</p> <p>Finish: Black glass ceramic electronic programming; Automatic Bridge function; Pot Speed test; 9 power setting per zone plus double Powerboost; touch controls; 2 individual slider commands; T-Chef function; intelligent pot localization; pause; recall; independent timer; security lock Accessories: spacer (see page 203)</p>	<p>Q4 FT</p>	<p>7341 655</p>	<p>Max power 3.700 W</p> <p>2 zones with Bridge function 180x220 mm-2.100 (2.600)* (3.700)** W</p> <p>* Powerboost - **Double Powerboost</p> <p></p>	<p>Flat-edge: 380x520 - cut-out: 350x490 Flush-mount: 380x520 - cut-out: see web site</p> 

S4000 Domino

Features | Version | Ref. | Technical Drawing



NEW



power supply:
single-phase 230V~1P+N
frequency 50+60 Hz

Induction cooker hob

Finish: White glass ceramic

electronic programming;
Automatic Bridge function;
Pot Speed test; 9 power setting per zone plus double Powerboost; touch controls; 2 individual slider commands; T-Chef function; * Powerboost - **Double Powerboost
intelligent pot localization; pause; recall; independent timer; security lock
Accessories: spacer (see page 203)




7341 255

Max power 3.700 W
2 zones with Bridge function
180x220 mm-2.100 (2.600)* (3.700)** W



Flat-edge: 380x520 - cut-out: 350x490
Flush-mount: 380x520 - cut-out: see web site



S4000.Domino.Teppan.IS.2



NEW



power supply:
single-phase 230V~1P+N
frequency 50+60 Hz


Induction cooker hob
steel surface;
2 independent cooking areas A and B;
9 power setting per zone;
Bridge function;
electronic programming;
touch-control; recall;
2 slider controls;
2 independent timers;
pause; security lock;
electronic temperature control from 50° to 220°C;
Pre-set temperatures to: cook meat, cook fish, cleaning.
Accessories: spacer (see page 203)

7325 455

Max power 2.800 W
2 cooking zones 2x1.400 W



Dimension: 380x520 - cut-out: 360x490

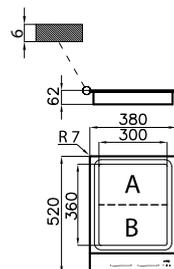

Perfect match
S4000 Domino Gas
See page 228

S4000 hobs can be put in sequence with **Domino Air** and **Domino Ghost** table suction hoods for an exclusive matching and effective suction.



S4000 Domino

Finish	Ref.
Stainless steel	8320 000

Spacer for Domino elements



Stainless steel 8320 000

The stainless steel jointing profile, allows the various Domino elements (vertical edge) to be coupled together with wide distance.

Dimensions: 30x520 mm
Thickness: 4 mm

Also available in "taylor-made" version (on request), the spacer allows to increase the space between Domino elements, thus creating a practical working surface.




Notice on installation in modular continuous solution





Installation with separate cut-outs

For proper continuous installation a distance of 20 mm among the products cutouts should be maintained (with the exception of a 18 mm distance between the hood and another product). To ensure the vertical alignment of the products we recommend a unique cut-out depth of 500 mm, regardless what is mentioned in the user's manuals (480, 490, 500 mm, depending on model).

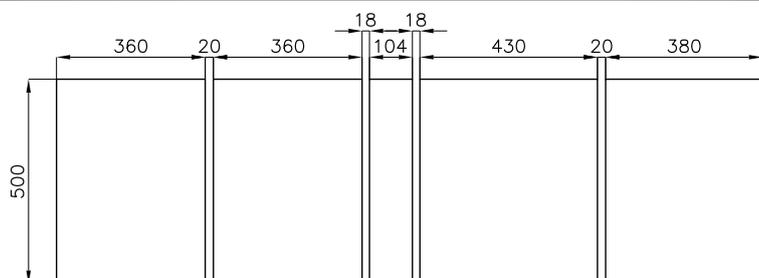

Installation with single cut-out using spacer

By using spacers you can install products in a single cut-out of 500 mm in depth and in length equal to the sum of dimensions of products and spacers, decreased of 20 mm. In the following example, from links: (380 +30 +30 +380 +120 +450 +30 +30 +400) mm-20 mm = 1830 mm

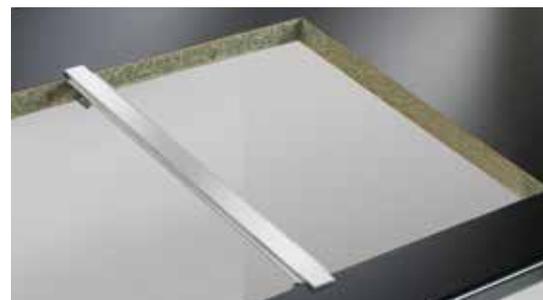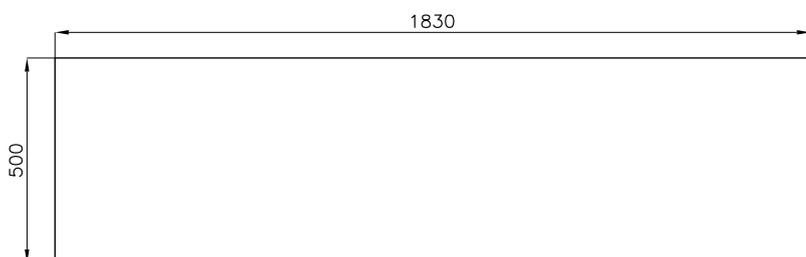

S4000 Domino is configured as a Q4 built-in. However, due to design constraints, some products have a slightly greater thickness. This produces a small step between the products when installed in continuous: Teppan, Wok and hood. For proper evaluation refer to each model drawings which give the exact thickness.

KE Induction NEW

PERFORMANCE WITH A MINIMAL LOOK



Features	Version	Ref.	Technical Drawing
----------	---------	------	-------------------



Induction cooker hob

Finish: Black glass ceramic


PowerControl function;
 electronic programming
 5 cooking areas with double extended Bridge zone
 9 power setting per zone plus Powerboost function;
 Slider controls; with white LED; heat maintenance function; Intelligent pot localization; pot detector; go&stop device; pause; recall; end of cooking programming; timer; Smart Fan System; security lock.

  **7384 645**

Max power	2.800, 3.500, 4.500, 6.000, 7.400, 10.400 W**
4 x 210x190	2.100 (3.000)* W
Ø 250	2.300 (3.000)* W

* Powerboost

Flat-edge: **860x510** - cut-out: **840x480**
 Flush-mount: **860x510** - cut-out: see web site

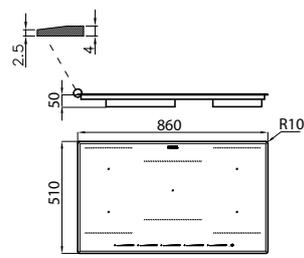

power supply:
 single-phase 230V~1P+N
 two-phase 400V~2P+N
 frequency 50±60 Hz



Induction cooker hob

Finish: Black glass ceramic


PowerControl function;
 electronic programming
 6 cooking areas with double extended Bridge zone
 9 power setting per zone plus Powerboost function;
 Slider controls; with white LED; heat maintenance function; Intelligent pot localization; pot detector; go&stop device; pause; recall; end of cooking programming; timer; Smart Fan System; security lock.

  **7383 645**

Max power	2.800, 3.500, 4.500, 6.000, 7.400, 11.100 W**
6 x 210x190	2.100 (3.000)* W

* Powerboost

Flat-edge: **770x510** - cut-out: **750x480**
 Flush-mount: **770x510** - cut-out: see web site

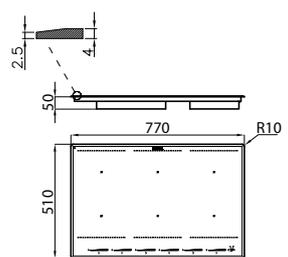

power supply:
 single-phase 230V~1P+N
 two-phase 400V~2P+N
 frequency 50±60 Hz



**with the PowerControl function, the maximum power can be set at any time among the following values

KE Induction NEW

Features | Version | Ref. | Technical Drawing



power supply:
single-phase 230V~1P+N
two-phase 400V~2P+N
frequency 50÷60 Hz

Induction cooker hob

Finish: Black glass ceramic

PowerControl function;
electronic programming
4 cooking areas with double
extended Bridge zone;
9 power setting per zone plus
Powerboost function;
Slider controls; with white
LED; heat maintenance
function; Intelligent pot
localization; pot detector;
go&stop device; pause; recall;
end of cooking programming;
timer; Smart Fan System;
security lock.



7382 645



Max power 2.800, 3.500, 4.500, 6.000, **7.400 W****

2 x 210x190	2.100 (3.000)* W
ø 200	2.300 (3.000)*W
ø 145	1.400 (1.850)*W

* Powerboost



Flat-edge: **770x510** - cut-out: **750x480**
Flush-mount: **770x510** - cut-out: see web site

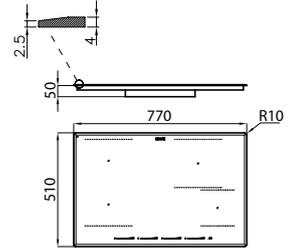

power supply:
single-phase 230V~1P+N
two-phase 400V~2P+N
frequency 50÷60 Hz

Induction cooker hob

Finish: Black glass ceramic

PowerControl function;
electronic programming
4 cooking areas with double
extended Bridge zone; 9
power setting per zone plus
Powerboost function; Slider
controls;
with white LED;
heat maintenance function;
Intelligent pot localization; pot
detector;
go&stop device;
pause; recall; end of cooking
programming; timer; Smart
Fan System;
security lock.



7381 645



Max power 2.800, 3.500, 4.500, 6.000, **7.400 W****

2 x 210x190	2.100 (3.000)* W
ø 200	2.300 (3.000)*W
ø 145	1.400 (1.850)*W

* Powerboost



Flat-edge: **580x510** - cut-out: **560x480**
Flush-mount: **580x510** - cut-out: see web site

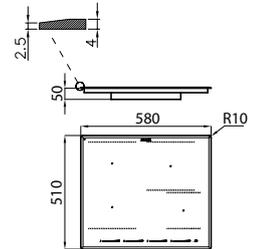

available until exhaustion

power supply:
single-phase 230V~1P+N
two-phase 400V~2P+N
frequency 50÷60 Hz

Induction cooker hob

Finish: White glass ceramic

PowerControl function;
electronic programming
4 cooking areas with double
extended Bridge zone; 9
power setting per zone plus
Powerboost function; Slider
controls;
heat maintenance function;
Intelligent pot localization; pot
detector; go&stop device;
pause; recall; end of cooking
programming; timer; Smart
Fan System; security lock.



7381 245


Max power 2.800, 3.500, 4.500, 6.000, **7.400 W****

2 x 210x190	2.100 (3.000)* W
ø 200	2.300 (3.000)*W
ø 145	1.400 (1.850)*W

* Powerboost



Flat-edge: **580x510** - cut-out: **560x480**
Flush-mount: **580x510** - cut-out: see web site

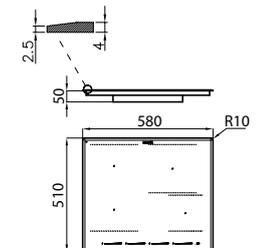

power supply:
single-phase 230V~1P+N
frequency 50÷60 Hz

Induction cooker hob

Finish: Black glass ceramic

PowerControl function;
electronic programming
2 cooking areas with double
extended Bridge zone
9 power setting per zone plus
Powerboost function;
Slider controls; with white
LED; heat maintenance
function; Intelligent pot
localization; pot detector;
go&stop device; pause; recall;
end of cooking programming;
timer; Smart Fan System;
security lock.



7380 645


Max power 2.800, 3.500, **3.700 W****

2 x 210x190	2.100 (3.000)* W
-------------	------------------

* Powerboost



Flat-edge: **290x510** - cut-out: **270x480**
Flush-mount: **290x510** - cut-out: see web site

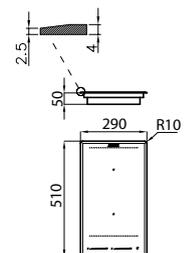

**with the PowerControl function, the maximum power can be set at any time among the following values

S1000 Induction



Features	Version	Ref.	Technical Drawing
----------	---------	------	-------------------



Induction cooker hob



7371 300


Finish:
Black glass ceramic

PowerControl function
electronic programming;
9 power setting per zone plus Powerboost function;
touch controls;
full safety system

Max power	2.800, 3.500, 6.000, 7.200** W
left	Ø 210 mm-1.500 (2.000)* W
left sup.	Ø 145 mm-1.200 (1.600)* W
right	Ø 145 mm-1.200 (1.600)* W
right sup.	Ø 210 mm-1.500 (2.000)* W

* Powerboost

Q4: 770x510 - cut-out: 740x480
Flush-mount: 770x510 - cut-out: see web site

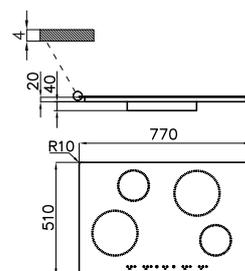

power supply:
single-phase 230V~1P+N
two-phase 400V~2P+N
frequency 50÷60 Hz



Induction cooker hob



7370 300


Finish:
Black glass ceramic

PowerControl function
electronic programming;
9 power setting per zone plus Powerboost function;
touch controls;
full safety system

Max power	2.800, 3.500, 6.000, 7.200** W
left	Ø 210 mm-1.500 (2.000)* W
left sup.	Ø 145 mm-1.200 (1.600)* W
right	Ø 145 mm-1.200 (1.600)* W
right sup.	Ø 210 mm-1.500 (2.000)* W

* Powerboost

Q4: 580x510 - cut-out: 560x480
Flush-mount: 580x510 - cut-out: see web site

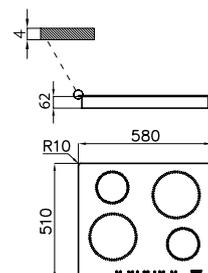


power supply:
single-phase 230V~1P+N
two-phase 400V~2P+N
frequency 50÷60 Hz



S1000 Induction

Features	Version	Ref.	Technical Drawing
----------	---------	------	-------------------



NEW



Induction cooker hob



Finish:
Black glass ceramic




7373 300

electronic programming
9 power setting per
zone plus Powerboost
function;
touch controls;
security lock

Max power	1.000, 1.500, 2.200, 2.800, 3.400, 5.200** W
left sup.	Ø 145 mm-1.200 (1.600)* W
left	Ø 240 mm-1.500 (2.000)* W
right	Ø 145 mm-1.200 (1.600)* W

* Powerboost

Q4: 440x500 - cut-out: 420x485
Flush-mount: 440x500 - cut-out: see web site

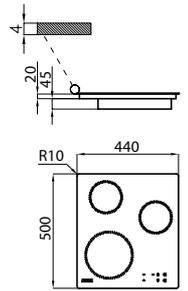

power supply:
single-phase 230V~1P+N
two-phase 400V~2P+N
frequency 50±60 Hz



Induction cooker hob



Finish:
Black glass ceramic




7322 300

electronic
programming;
9 power setting per
zone plus Powerboost
function;
touch controls;
full safety system

Max power	3.700 W
superior	Ø 200 mm-2.300 (3.000)* W
bottom	Ø 160 mm-1.400 W

* Powerboost

Q4: 290x510 - cut-out: 270x490
Flush-mount: 290x510 - cut-out: see web site

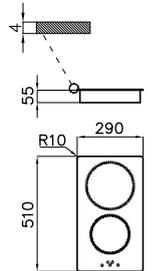

power supply:
single-phase 230V~1P+N
frequency 50±60 Hz



**with the PowerControl function, the maximum power can be set at any time among the following values





Connection of the Modular system

Elements' placing


The Modular system allows a free placing of its elements. The only limit is posed by the length of the cables which connect the different elements to the connection box: 60 cm between touch-control unit and connection box and 90 cm between cooking plates and connection box.

Combination of cooking plates

The system can be assembled freely; some combinations that are not possible are highlighted in the remarks concerning the Touch control modules

Connection box

The set-up is easy and intuitive. The box can be placed on the wall behind the cabinet or inside it, under the countertop.

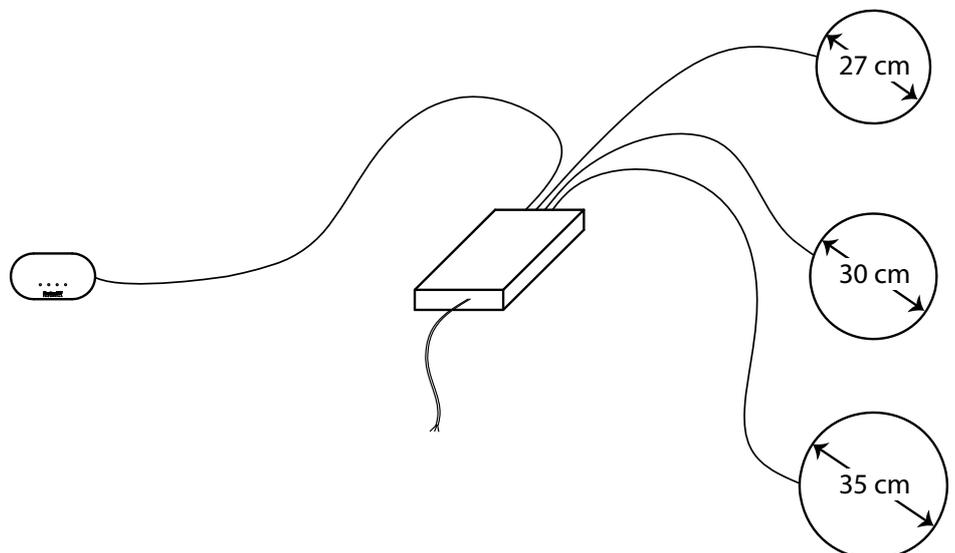

Modular and Modular Quadra Induction Series

Maximum freedom

Modular Induction is a new Foster proposal that offers full freedom to compose your induction hob according to the available space and your specific needs.

Countless possibilities

The three models of hobs, different for diameter and power, can be positioned with great flexibility in combinations of two, three or four zones controlled by their own touch controls.

Intuitive installation

The installation is quick and easy thanks to the connection box, easy to fit under the worktop, which connects the plates to the touch controls.

Matching to your style

Modular Induction is available in black or white version, for a perfect harmony with your worktop and your kitchen.




Modular Induction Series - touch control module



Touch controls module; Slider function; electronic independent programming of cooking zones; 9 power setting per zone plus Powerboost function; Slider control; touch control; go&stop device; safety lock;

to be ordered with matching connection box
Connection cable length: 60 cm







Note: the touch control module requires a simple configuration, depending on the combination of plates associated, as indicated in the installation manual.

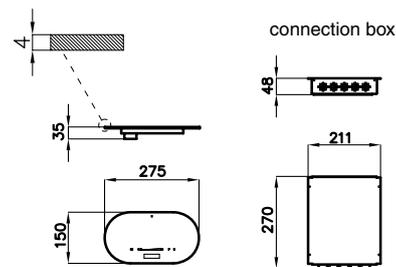

power supply:
single-phase 230V~1P+N
two-phase 400V~2P+N
frequency 50÷60 Hz









Dimensions: 275x150 mm R75
Flush-mount cut-out: see web site

	Version	Ref.	
4 zones touch control 	 black + connection box	7368 040 + 7369 040	Possible zones combinations: - 2 zones 7361 27* - 2 free zones (any model)
	 white + connection box	7368 045 + 7369 040	
3 zones touch control 	 black + connection box	7368 030 + 7369 030	Possible zones combinations: - 1 zone 7361 27* - 2 free zones (any model)
	 white + connection box	7368 035 + 7369 030	
2 zones touch control 	 black + connection box	7368 020 + 7369 020	Possible zones combinations: - 2 free zones (any model)
	 white + connection box	7368 025 + 7369 020	
Ø 350 induction zone 	 black	7363 350	 flush-mount cut-out: see web site Max power 2.300 (3.000)* W * Powerboost
	 white	7363 355	
Ø 300 induction zone 	 black	7362 300	 flush-mount cut-out: see web site Max power 2.300 (3.000)* W
	 white	7362 305	
Ø 270 induction zone 	 black	7361 270	 flush-mount cut-out: see web site Max power 1.100 (1.400)* W * Powerboost
	 white	7361 275	

Modular Configurations

The following items represent some of our already configured proposals, and do not exclude the possibility of other combinations of plates. The arrangement of the elements on the worktop remains free, with the only constraints listed in the "Connection of the Modular Induction System" section.

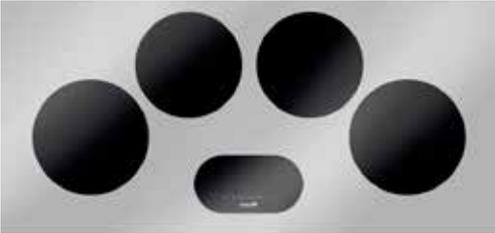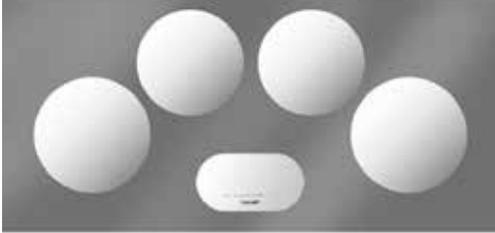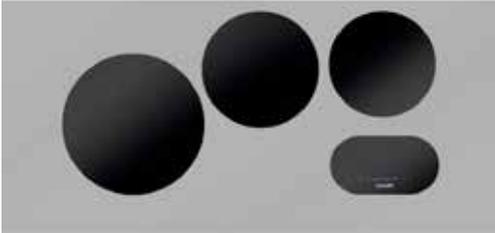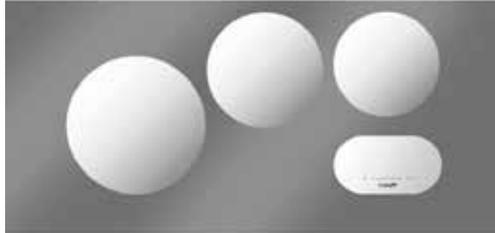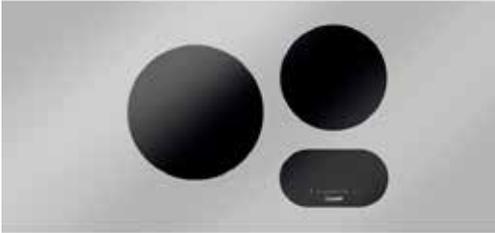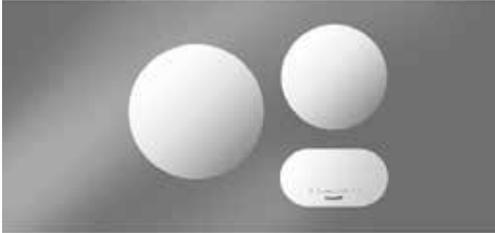	Ref.		Ref.		
4 zones black - round	7366 040		4 zones white - round	7366 045	
		1 Touch control 1 connection box 2 zones Ø 300 2 zones Ø 270			1 Touch control 1 connection box 2 zones Ø 300 2 zones Ø 270
3 zones black - round	7366 030		3 zones white - round	7366 035	
		1 Touch control 1 connection box 1 zone Ø 350 1 zone Ø 300 1 zone Ø 270			1 Touch control 1 connection box 1 zone Ø 350 1 zone Ø 300 1 zone Ø 270
2 zones black - round	7366 020		2 zones white - round	7366 025	
		1 Touch control 1 connection box 1 zone Ø 350 1 zone Ø 270			1 Touch control 1 connection box 1 zone Ø 350 1 zone Ø 270




Modular Quadra Series



Touch controls module; Slider function; electronic independent programming of cooking zones; 9 power setting per zone plus Powerboost function; Slider control; touch control; go&stop device; safety lock;

to be ordered with matching connection box
Connection cable length: 60 cm




Note: the touch control module requires a simple configuration, depending on the combination of plates associated, as indicated in the installation manual.

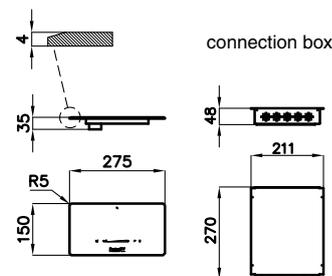

power supply:
single-phase 230V~1P+N
two-phase 400V~2P+N
frequency 50÷60 Hz




Dimensions: 275x150 mm R5
Flush-mount cut-out: see web site

		Version	Ref.	
4 zones touch control 	 	T. Control + connection box	7367 040 + 7369 040	Possible zones combinations: - 2 zones 7364 270 - 2 free zones (any model)
3 zones touch control 	 	T. Control + connection box	7367 030 + 7369 030	Possible zones combinations: - 1 zone 7364 270 - 2 free zones (any model)
2 zones touch control 	 	T. Control + connection box	7367 020 + 7369 020	Possible zones combinations: - 2 free zones (any model)
Ø 350 induction zone 	 		7366 350	flush-mount cut-out: see web site  Max power 2.300 (3.000)* W * Powerboost
Ø 300 induction zone 	 		7365 300	flush-mount cut-out: see web site  Max power 2.300 (3.000)* W * Powerboost
Ø 270 induction zone 	 		7364 270	flush-mount cut-out: see web site  Max power 1.100 (1.400)* W * Powerboost

Modular Quadra Configurations

The following items represent some of our already configured proposals, and do not exclude the possibility of other combinations of plates. The arrangement of the elements on the worktop remains free, with the only constraints listed in the "Modular Induction Connection" section (see page 208).

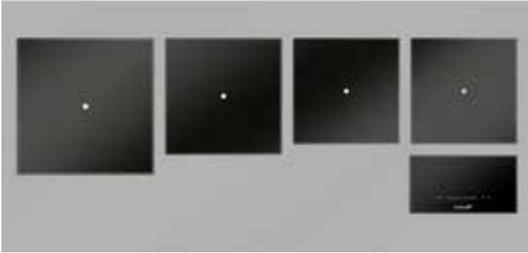	Ref.		Ref.
4 zones black - Q	7365 040		
		1 Touch control 1 connection box 1 zone 350 mm 1 zone 300 mm 2 zones 270 mm	1 Touch control 1 connection box 1 zone 350 mm 1 zone 300 mm 1 zone 270 mm
2 zones black - Q	7365 020		
		1 Touch control 1 connection box 1 zone 350 mm 1 zone 270 mm	






GAS COOKER HOBS

Energy saving with maximum efficiency.



Foster Milano
p. 219



Milanello 5F
p. 222

NEW



Milanello
p. 224

NEW




Milanello PVD
p. 225

NEW



S4000
p. 227



S4000 Domino
p. 228



S4000 Line XL
p. 229




S4000 Line
p. 230



Quadra Angolare
p. 231



FL p. 232



KE p. 234



KE black
p. 235



KE PVD
p. 236



KE Line
p. 237



KF Marine
p. 238



KS
p. 239



Ceramik
p. 240



Professionale
p. 242



Veronika
p. 243




Power
p. 244

NEW



Elettra
p. 245




Angolare
p. 246



High efficiency coupled with environmental awareness



High efficiency coupled with environmental awareness. Foster offers a broad and modern selection of cooker hobs that are tailored to various space-related needs and implement special technological features for guaranteed energy saving. The new cooker hobs feature high-efficiency burners that allow a gas saving from 20% to 25% when compared to traditional hobs.

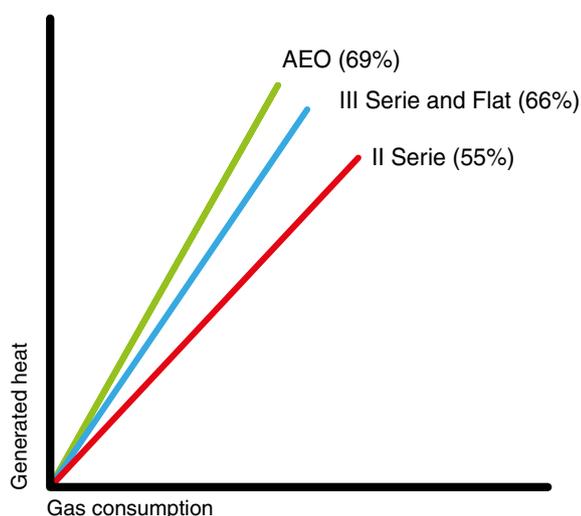

High Efficiency burners (AEO): 5kW and 25% gas saving

Energy efficiency is a plus offered by the research of Foster. Thanks to the new AEO burners cooker hobs have a maximum efficiency rate of 69% and the DUAL AEO burner reaches a maximum power of 5 kW. The brass burner ring gives a professional look.



3rd series burners: 20% gas saving

They guarantee a much higher efficiency compared to the European standards. The locking system between flame-spreader and cap ensures a perfect positioning and easiness of cleaning.



Dual burners: from 300 to 4.500 W

Innovative and versatile burner, with triple crown ignited independently by a single knob. Power delivery from 300 to 4500 W.



Flat burners with PrecisePower system: great control in flame-settings

Maximum precision in regulating the flame, thanks to the 10 pre-set levels of the PrecisePower system. And as a benefit, the nice and ultra-low look of the new Flat burners.

Features

Safety in the kitchen

The ultra-rapid latest generation thermocouples make the burners even safer while the ignition time is reduced to the minimum.



Safe cooking

Foster hobs are equipped with safety valves. They shut off the gas supply very quickly if the flame accidentally goes out.



Under-knob ignition

The utmost freedom of movement with electronic under-knob ignition allows a one-hand ignition of the burner.




Ultra-flat

Design meets functionality in the the ultra-flat models. Elegant grids that form a generously sized overall surface.

Grids

All Foster cooker hobs are equipped with cast-iron grids, a perfect material for this use, thanks to its many properties.

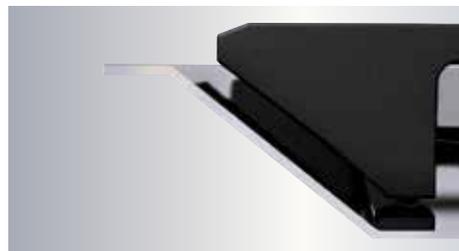

Pure elegance

The cone-shaped hobs raise up from the surface, evoking the power of fire. The grids surmount the burners, leaving the hobs surface “free.”

Cast-iron grids

All the hobs are equipped with cast-iron grids, a perfect material due to its many properties: high thermal capacity; weight and stability that improve safety; sturdiness which keeps their look unaltered over time; easiness to clean.

Practicality

A deep and inclined containing area cradles the burners and cast-iron grids, which form a continuous workable surface. The inclination of the containing area’s edge, makes it very easy to clean, also in corners.

Features

Beyond built-in

Foster has been the first manufacturer to search for new built-in solutions, and has today a vast experience and the most complete range of flush-mount and flat-edge products.



Standard

Traditional built-in with the vertical, 8-mm edge.



Q4

The casing has a square edge that stands outside the work surface by just 4 mm.



Flat-edge

An original edge, with an inclined, 3-mm high profile, matching an extreme elegance with the easiness of installation.



Flush-mount

The flush-mount cooker hobs have no vertical edge, and must be sunk into a 1,5 mm deep recess in the worktop's surface.



Built-in

Almost the whole range of Foster cooker hobs can be integrated into stainless steel worktops; it is the most elegant and professional solution, that creates a seamless work-surface.

accessories

1



Wok support
9601 668

2



Wok support
9601 727

3



Cast-iron grill 44x22 cm
8172 000

4



Cast-iron support 11x23 cm
9601 742

5



Cast-iron support
9601 741

Foster Milano




Foster Milano

FORMAL PURITY, PROFESSIONAL PERFORMANCE



 **High-Efficiency burners.**
Up to 25% energy saving

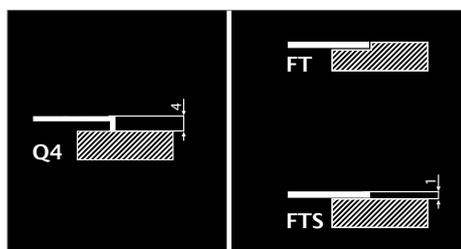

Flexible installation

The Foster Milano hobs are available with several types of edge: flush-mount (FT), top-mount in the elegant version with (Q4) edge, or also by installing the flush-mount version as top-mount (FTS).



XXL Grids

The weighty enamelled cast iron grid has extraordinary dimensions, 33x25 cm, with a working surface up to 50% bigger compared to a standard cooker hob.



Ultra-flat surface

The cast-iron grids form a seamless surface jutting just a few millimeters from the hob, on which one can move pots around with great ease and in perfect safety.



High efficiency burners

The AE burners guarantee up to 25% energy saving compared to standard burners. All models are designed with at least one wok Dual burner of 4.2 kW.



Cast iron wok support









All the Foster Milano cooker hobs are equipped with a precious cast iron wok support, that allows the safe use of rounded pans.



Foster Milano knob

The precious satin-finish metal knob, is the defining element of the entire series. It is present on the cooker hob, on the oven and even graces the tap area of the sink.

Foster Milano

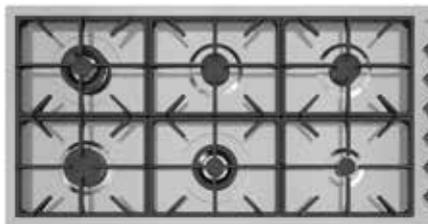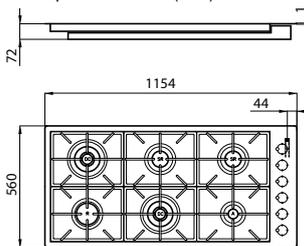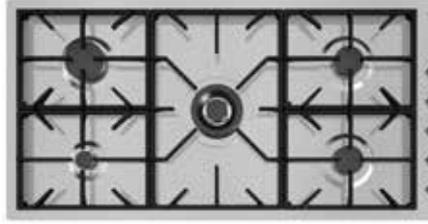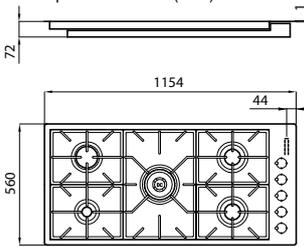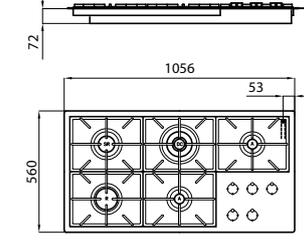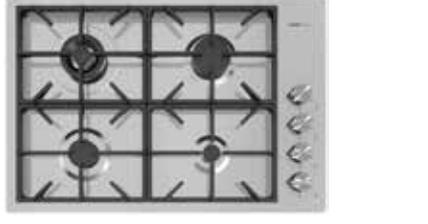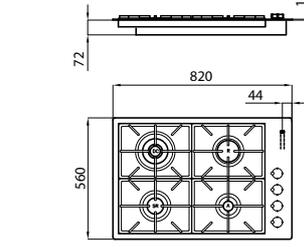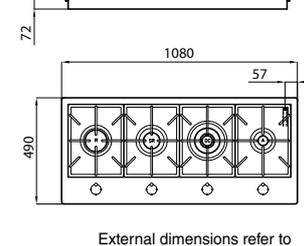Features	Version	Ref.	Technical Drawing
	 	<p>7639 000</p>	<p>Flush-mount: 1154x560 - cut-out (FT): see web site up-mount cut-out (FTS): 1134x540</p> 
<p>AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power 15.900 W auxiliary: 1.000 W semi-rapid: 2x1.750 W</p>	<p>rapid: 3.000 W dual: 2x4.200 W Electric ignition Safety valves with ultra-rapid thermocouples</p>	<p>Supplied with: 2x  (see page 218)</p>	<p>External dimensions refer to Flush-mount version Power supply: 220-240 V 50-60 Hz</p>
	 	<p>7636 000</p>	<p>Flush-mount: 1154x560 - cut-out (FT): see web site up-mount cut-out (FTS): 1134x540</p> 
<p>AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power 11.700 W auxiliary: 1.000 W semi-rapid: 2x1.750 W</p>	<p>rapid: 3.000 W dual: 4.200 W Electric ignition Safety valves with ultra-rapid thermocouples</p>	<p>available until exhaustion</p> <p>Supplied with:  (see page 218)</p>	<p>External dimensions refer to Flush-mount version Power supply: 220-240 V 50-60 Hz</p>
	 	<p>7638 000</p>	<p>Flush-mount: 1056x560 - cut-out (FT): see web site up-mount cut-out (FTS): 1036x540</p> 
<p>Supplied with:  (see page 218)</p>	<p>AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power 10.950 W auxiliary: 2x1.000 W semi-rapid: 1.750 W rapid: 3.000 W dual: 4.200 W Electric ignition Safety valves with ultra-rapid thermocouples</p>	<p>Supplied with:  (see page 218)</p>	<p>External dimensions refer to Flush-mount version Power supply: 220-240 V 50-60 Hz</p>
	 	<p>7637 000</p>	<p>Flush-mount: 820x560 - cut-out (FT): see web site up-mount cut-out (FTS): 800x540</p> 
<p>Supplied with:  (see page 218)</p>	<p>AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power 9.950 W auxiliary: 1.000 W semi-rapid: 1.750 W rapid: 3.000 W dual: 4.200 W Electric ignition Safety valves with ultra-rapid thermocouples</p>	<p>Supplied with:  (see page 218)</p>	<p>External dimensions refer to Flush-mount version Power supply: 220-240 V 50-60 Hz</p>
	 	<p>7640 000</p>	<p>Flush-mount: 1080x490 - cut-out (FT): see web site up-mount cut-out (FTS): 1060x470</p> 
<p>Supplied with:  (see page 218)</p>	<p>AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power 9.950 W auxiliary: 1.000 W semi-rapid: 1.750 W rapid: 3.000 W dual: 4.200 W Electric ignition Safety valves with ultra-rapid thermocouples</p>	<p>Supplied with:  (see page 218)</p>	<p>External dimensions refer to Flush-mount version Power supply: 220-240 V 50-60 Hz</p>




Milanello 5F **NEW**





PrecisePower: great control in flame-setting



- 10 power levels
- maximum precision in choosing the flame setting
- ultra-flat look

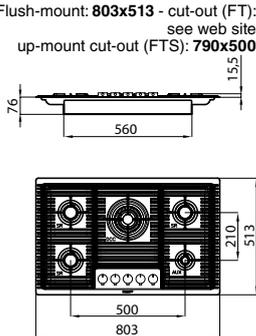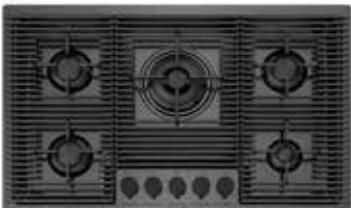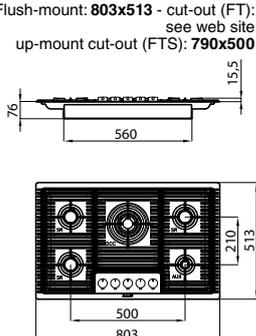	Features	Version	Ref.	Technical Drawing
 <p>Accessories: 2 see page 218)</p>	<p>AISI 304 brushed Cast iron grids and enamelled burner covers. Flat burners. Tot. power: 10.250 W auxiliary: 1.000 W semi-rapid: 3x1.750 W double crown: 4.000 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	<p> FT</p> <p> FTS</p>	7682 000	<p>Flush-mount: 803x513 - cut-out (FT): see web site up-mount cut-out (FTS): 790x500</p>  <p>Power supply: 220-240 V 50-60 Hz</p>
 <p>Accessories: 2 see page 218)</p>	<p>AISI 304 Gun Metal Cast iron grids and enamelled burner covers. Flat burners. Tot. power: 10.250 W auxiliary: 1.000 W semi-rapid: 3x1.750 W double crown: 4.000 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	<p> FT</p> <p> FTS</p>	7682 006	<p>Flush-mount: 803x513 - cut-out (FT): see web site up-mount cut-out (FTS): 790x500</p>  <p>Power supply: 220-240 V 50-60 Hz</p>

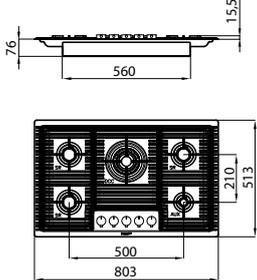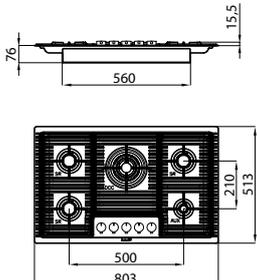





	Features	Version	Ref.		Technical Drawing
 <p data-bbox="97 1704 355 1731">Accessories: 2 see page 218)</p>	<p data-bbox="459 1384 523 1424">NEW</p> <p data-bbox="544 1391 679 1417">AISI 304 Copper</p> <p data-bbox="544 1417 695 1480">Cast iron grids and enamelled burner covers.</p> <p data-bbox="544 1480 647 1503">Flat burners.</p> <p data-bbox="544 1503 715 1525">Tot. power: 10.250 W</p> <p data-bbox="544 1525 687 1547">auxiliary: 1.000 W</p> <p data-bbox="544 1547 711 1570">semi-rapid: 3x1.750 W</p> <p data-bbox="544 1570 724 1592">double crown: 4.000 W</p> <p data-bbox="544 1615 668 1637">Electric ignition</p> <p data-bbox="544 1659 667 1727">Safety valves with ultra-rapid thermocouples</p>	<p data-bbox="791 1391 815 1413">FT</p> <p data-bbox="791 1447 815 1469">FTS</p>	<p data-bbox="852 1424 935 1447">7682 008</p>		<p data-bbox="1254 1379 1519 1435">Flush-mount: 803x513 - cut-out (FT): see web site</p> <p data-bbox="1273 1413 1519 1435">up-mount cut-out (FTS): 790x500</p>  <p data-bbox="1273 1738 1519 1760">Power supply: 220-240 V 50-60 Hz</p>
 <p data-bbox="97 2101 355 2128">Accessories: 2 see page 218)</p>	<p data-bbox="459 1780 523 1821">NEW</p> <p data-bbox="544 1787 655 1814">AISI 304 Gold</p> <p data-bbox="544 1814 695 1877">Cast iron grids and enamelled burner covers.</p> <p data-bbox="544 1877 647 1899">Flat burners.</p> <p data-bbox="544 1899 715 1921">Tot. power: 10.250 W</p> <p data-bbox="544 1921 687 1944">auxiliary: 1.000 W</p> <p data-bbox="544 1944 711 1966">semi-rapid: 3x1.750 W</p> <p data-bbox="544 1966 724 1989">double crown: 4.000 W</p> <p data-bbox="544 2011 668 2033">Electric ignition</p> <p data-bbox="544 2056 667 2123">Safety valves with ultra-rapid thermocouples</p>	<p data-bbox="791 1787 815 1809">FT</p> <p data-bbox="791 1843 815 1865">FTS</p>	<p data-bbox="852 1821 935 1843">7682 009</p>		<p data-bbox="1254 1776 1519 1832">Flush-mount: 803x513 - cut-out (FT): see web site</p> <p data-bbox="1273 1809 1519 1832">up-mount cut-out (FTS): 790x500</p>  <p data-bbox="1273 2134 1519 2157">Power supply: 220-240 V 50-60 Hz</p>

Milanello

THE ELEGANCE OF THE MILANO COLLECTION COUPLED WITH THE FUNCTIONALITY OF IN-LINE BURNERS



 **High-Efficiency burners.**
Up to 25% energy saving

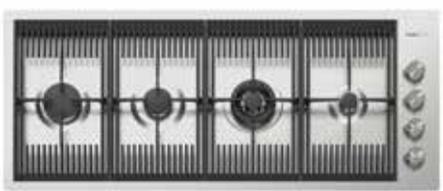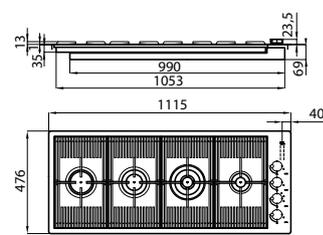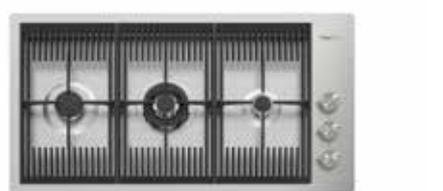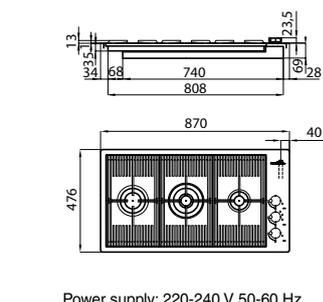	Features	Version	Ref.	Technical Drawing
		 FT	7681 000	Flush-mount: 1115X476 - cut-out (FT): see web site up-mount cut-out (FTS): 1098X459 
AISI 304 brushed cast iron grids and enamelled burner covers Tot. power 10.750 W auxiliary: 1.000 W semi-rapid: 1.750 W		 FTS	7681 000	Accessories: 2 (see page 218) Power supply: 220-240 V 50-60 Hz
		 FT	7680 000	Flush-mount: 1115X476 - cut-out (FT): see web site up-mount cut-out (FTS): 1098X459 
AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power 7.750 W auxiliary: 1.000 W semi-rapid: 1.750 W		 FTS	7680 000	Accessories: 2 (see page 218) Power supply: 220-240 V 50-60 Hz


Milanello PVD **NEW**

Caratteristiche

Versione

Sigla

Disegno Tecnico

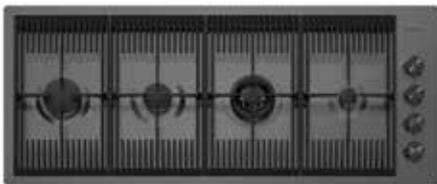


 **FT**
7681 006

 **FTS**
7681 006

Accessories: **2** (see page 218)


Filotop: **1115X476** - cut-out (FT): see web site
up-mount cut-out (FTS): **1098X459**

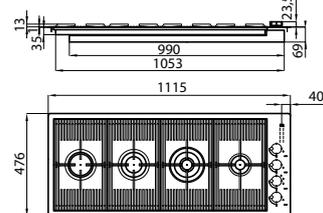

Power supply: 220-240 V 50-60 Hz

AISI 304 Gun Metal
Cast iron grids and
enamelled burner covers
Tot. power: 10.750 W
auxiliary: 1.000 W
semi-rapid: 1.750 W

rapid: 3.000 W
dual: 5.000 W
Electric ignition
Safety valves
with ultra-rapid
thermocouples

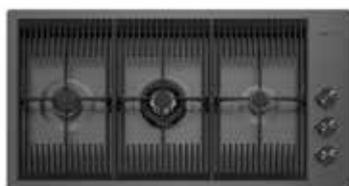


 **FT**
7680 006

 **FTS**
7680 006

Accessories: **2** (see page 218)

Filotop: **870x476** - cut-out (FT): see web site
up-mount cut-out (FTS): **853x459**

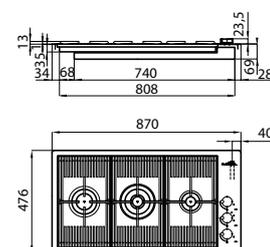


Power supply: 220-240 V 50-60 Hz

AISI 304 Gun Metal
Cast iron grids and
enamelled burner covers
Tot. power: 7.750 W
auxiliary: 1.000 W
semi-rapid: 1.750 W

dual: 5.000 W
Electric ignition
Safety valves
with ultra-rapid
thermocouples

In the Gun Metal and Copper versions, also the knobs have a PVD Gun Metal finish, ensuring a perfect harmony of colours and finish.

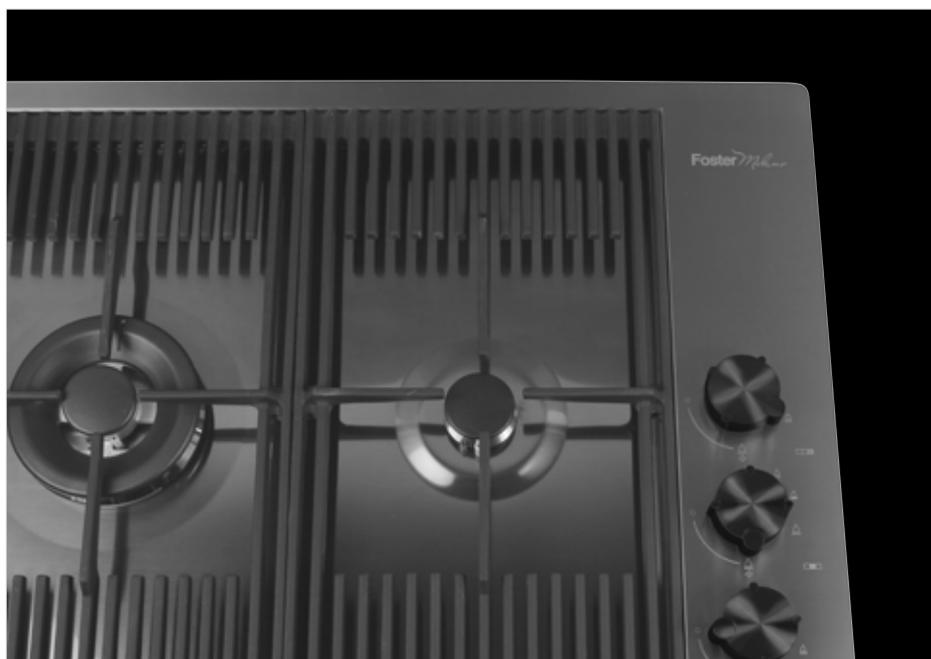

Milanello PVD


NEW

Features

Version

Ref.


Technical Drawing

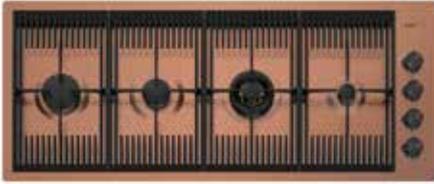

	7681 008
	7681 008

Accessories: **2** (see page 218)


Filopot: **1115X476** - cut-out (FT): see web site
up-mount cut-out (FTS): **1098X459**

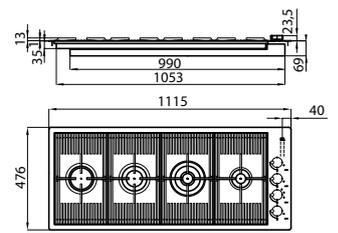

Power supply: 220-240 V 50-60 Hz

AISI 304 Copper
Cast iron grids and
enamel burner covers
Tot. power: 10.750 W
auxiliary: 1.000 W
semi-rapid: 1.750 W


rapid: 3.000 W
dual: 5.000 W
Electric ignition
Safety valves
with ultra-rapid
thermocouples

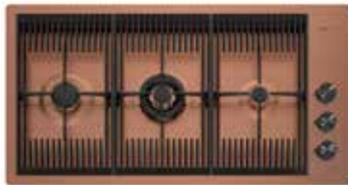

	7680 008
	7680 008

Accessories: **2** (see page 218)


Filopot: **870x476** - cut-out (FT): see web site
up-mount cut-out (FTS): **853x459**

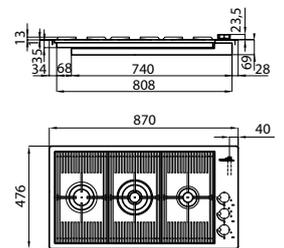

Power supply: 220-240 V 50-60 Hz

AISI 304 Copper
Cast iron grids and
enamel burner covers
Tot. power: 7.750 W
auxiliary: 1.000 W
semi-rapid: 1.750 W


dual: 5.000 W
Electric ignition
Safety valves
with ultra-rapid
thermocouples

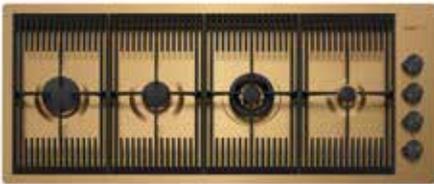

	7681 009
	7681 009

Accessories: **2** (see page 218)

Filopot: **1115X476** - cut-out (FT): see web site
up-mount cut-out (FTS): **1098X459**

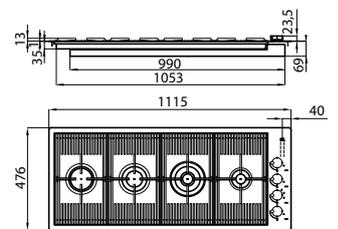

Power supply: 220-240 V 50-60 Hz

AISI 304 Gold
Cast iron grids and
enamel burner covers
Tot. power: 10.750 W
auxiliary: 1.000 W
semi-rapid: 1.750 W


rapid: 3.000 W
dual: 5.000 W
Electric ignition
Safety valves
with ultra-rapid
thermocouples



	7680 009
	7680 009

Accessories: **2** (see page 218)

Filopot: **870x476** - cut-out (FT): see web site
up-mount cut-out (FTS): **853x459**

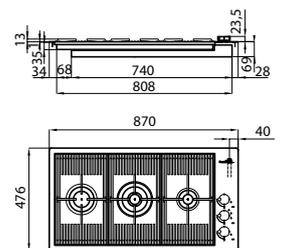


Power supply: 220-240 V 50-60 Hz

AISI 304 Gold
Cast iron grids and
enamel burner covers
Tot. power: 7.750 W
auxiliary: 1.000 W
semi-rapid: 1.750 W



dual: 5.000 W
Electric ignition
Safety valves
with ultra-rapid
thermocouples

S4000




THE UNCOMPROMISING QUALITY

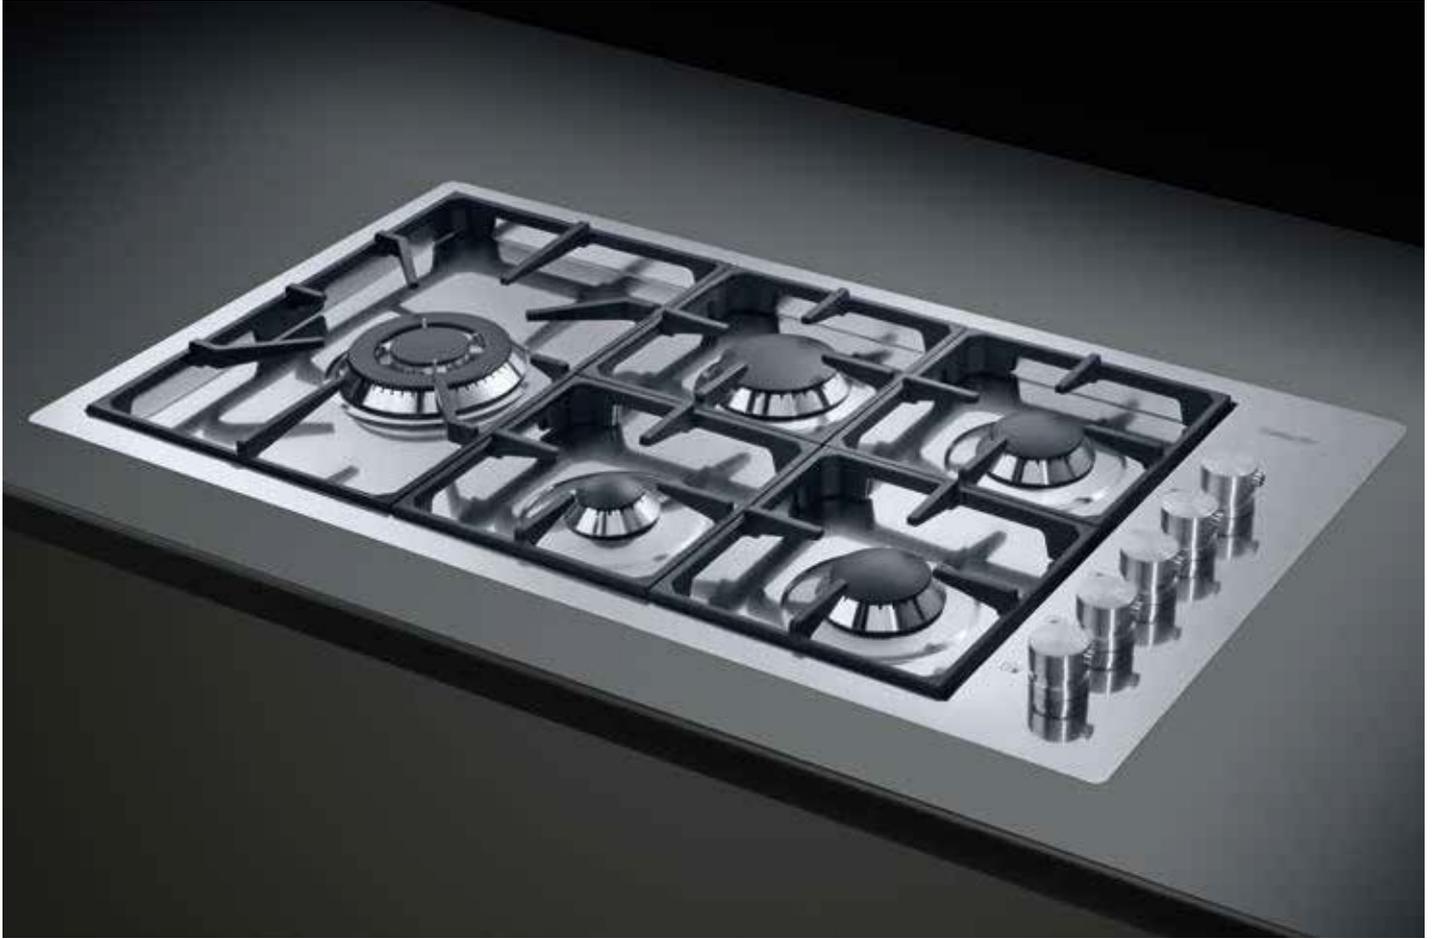

 **New generation hobs.**
Up to 20% energy saving

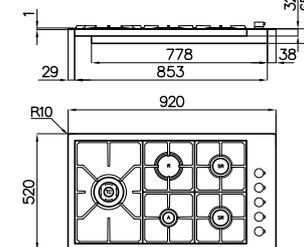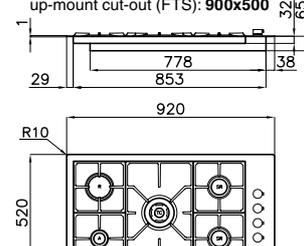	Features	Version	Ref.	Technical Drawing
 <p>Supplied with: 1 Accessories Flush-mount: 4 (see page 218)</p>	<p>AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power: 11.400 W auxiliary: 1.100 W semi-rapid: 2x1.750 W rapid: 3.000 W triple crown: 3.800 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	<p> FT  FTS</p>	<p>7257 032</p>	<p>Flush-mount: 920x520 - cut-out (FT): see web site up-mount cut-out (FTS): 900x500</p>  <p>External dimensions refer to Flush-mount version Power supply: 220-240 V 50-60 Hz</p>
 <p>Supplied with: 1 Accessories Flush-mount: 4 (see page 218)</p>	<p>AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power: 11.400 W auxiliary: 1.100 W semi-rapid: 2x1.750 W rapid: 3.000 W triple crown: 3.800 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	<p> FT  FTS</p>	<p>7271 032</p>	<p>Flush-mount: 920x520 - cut-out (FT): see web site up-mount cut-out (FTS): 900x500</p>  <p>External dimensions refer to Flush-mount version Power supply: 220-240 V 50-60 Hz</p>

S4000

	Features	Version	Ref.	Technical Drawing
	<p>AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power: 7.600 W auxiliary: 1.100 W semi-rapid: 2x1.750 W rapid: 3.000 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	<p>FT</p> <p>FTS</p>	7256 032	<p>Flush-mount: 620x520 - cut-out (FT): see web site up-mount cut-out (FTS): 600x500</p>  <p>External dimensions refer to Flush-mount version Power supply: 220-240 V 50-60 Hz</p>
Accessories Flush-mount: 4 (see page 218)				
	<p>AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power: 5.000 W dual AE: 5.000 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	<p>Q4</p>	7278 032	<p>Q4: 450x520 - cut-out: 430x480</p>  <p>Power supply: 220-240 V 50-60 Hz</p>
Supplied with: 2 , 4 (see page 218)				
	<p>AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power: 2.750 W auxiliary AE: 1.000 W semi-rapid AE: 1.750 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	<p>Q4</p>	7276 032	<p>Q4: 380x520 - cut-out: 360x480</p>  <p>Power supply: 220-240 V 50-60 Hz</p>
Supplied with: 4 (see page 218)				



A versatile pot support

The flush-mount versions are supplied with the pot support accessory (Ref. 9601 742) that increases the work surface and safeguards the worktop against accidental contact with hot pots. It is a standard feature available on all S4000 Domino hobs.

S4000 Line XL

CHAMPION OF FUNCTIONALITY



 **New generation hobs.**
Up to 20% energy saving


Features	Version	Ref.	Technical Drawing
----------	---------	------	-------------------



AISI 304 brushed
Cast iron grids and
enamelled burner covers
Tot. power 9.650 W
auxiliary: 1.100 W
semi-rapid: 1.750 W

rapid: 3.000 W
triple crown: 3.800 W
Electric ignition
Safety valves
with ultra-rapid
thermocouples

 FT
7284 042
 FTS

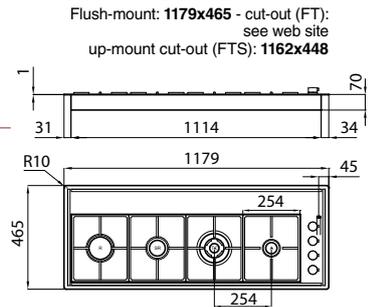

Supplied with: 4x ,  (see page 218)


Power supply: 220-240 V 50-60 Hz



AISI 304 brushed
Cast iron grids and
enamelled burner covers
Tot. power 6.650 W
auxiliary: 1.100 W
semi-rapid: 1.750 W

triple crown: 3.800 W
Electric ignition
Safety valves
with ultra-rapid
thermocouples

 FT
7285 032
 FTS

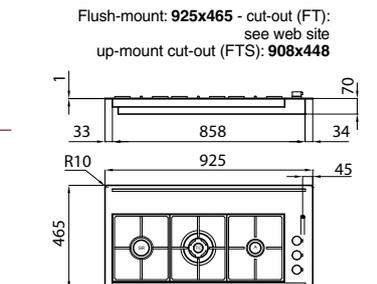


Supplied with: 3x ,  (see page 218)

Power supply: 220-240 V 50-60 Hz



Champion of functionality

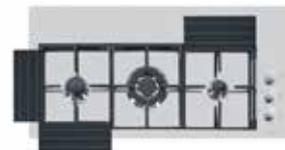

XL versions are characterized by the greater depth of the steel lip, on which are positioned elegant cast iron elements. These can also be placed in the front of the hob, or used as a trivet on the table.

S4000 Line

A LINEAR CONCEPT OF PRACTICALITY



 **New generation hobs.**
Up to 20% energy saving

Features	Version	Ref.	Technical Drawing
----------	---------	------	-------------------



AISI 304 brushed
Cast iron grids and
enamelled burner covers
Tot. power: 9.650 W
auxiliary: 1.100 W
semi-rapid: 1.750 W



rapid: 3.000 W
triple crown: 3.800 W
Electric ignition
Safety valves
with ultra-rapid
thermocouples

Supplied with: **1**
Accessories Flush-mount: **5** (see page 218)

 **7250 042**
available until exhaustion

 **7259 042**


Flat-edge: **1179x368** - cut-out: **1162x351**
Flush-mount: **1179x368** - cut-out (FT):
see web site
up-mount cut-out (FTS): **1162x351**

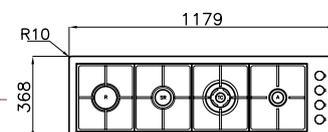

External dimensions refer to
Flush-mount version

Power supply: 220-240 V 50-60 Hz




AISI 304 brushed
Cast iron grids and
enamelled burner covers
Tot. power 6.650 W
auxiliary: 1.100 W

semi-rapid: 1.750 W
triple crown: 3.800 W
Electric ignition
Safety valves
with ultra-rapid
thermocouples

Supplied with: **1**
Accessories Flush-mount: **5** (see page 218)

 **7286 032**


Flush-mount: **925x368** - cut-out (FT):
see web site
up-mount cut-out (FTS): **908x351**

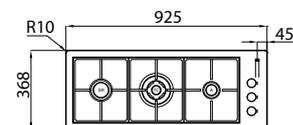

Power supply: 220-240 V 50-60 Hz

Elegant metallic knob

The entire 4000 Series is equipped with the new elegant and plain knob. As on all Foster cooker hobs, the appliances have under-knob ignition. Moreover, ignition is now even quicker thanks to the new burners.



Quadra Angolare

A PERFORMING COOKING CORNER





Features	Version	Ref.	Technical Drawing
----------	---------	------	-------------------

Flat-edge: 972x972 - cut-out: see web site



available until exhaustion

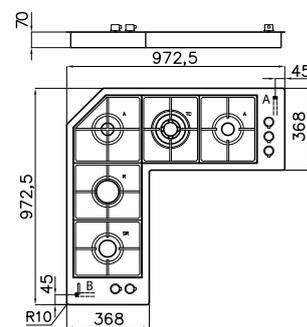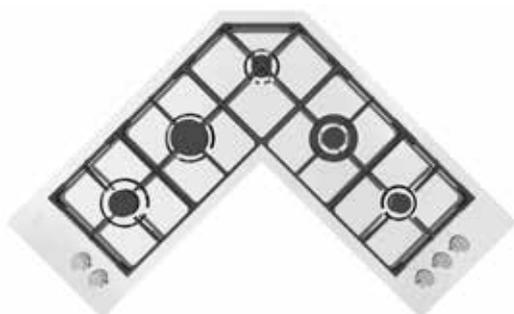

AISI 304 brushed
Cast iron grids and
enamelled burner covers
Tot. power: 9.950 W
auxiliary: 2x1.000 W
semi-rapid: 1.750 W

rapid: 2.700 W
triple crown: 3.500 W
Electric ignition
Safety valves
with ultra-rapid
thermocouples

Connection to the gas supply network must be carried out through both inlets (A and B)

Power supply: 220-240 V 50-60 Hz

Accessories: **1** (see page 218)

A smart corner

Thanks to its broad front work surface, the Quadra Corner cooker hob allows for optimally exploiting corner spaces.





FL

PERFORMANCE AND EFFICIENCY WITH STYLE



High-Efficiency burners
Up to 25% energy saving

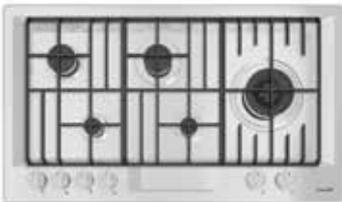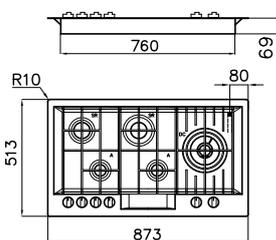	Features	Version	Ref.	Technical Drawing
 <p>Supplied with:</p> <p>2  Wok support 9601 727</p>	<p>AISI 304 brushed Cast iron grids and enamel burner covers</p> <p>Tot. power 10.500 W auxiliary: 2x1.000 W dual AE: 5.000 W semi-rapid: 2x1.750 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>		7201 032	<p>Standard: 860x500 - cut-out: 840x480 Flat-edge: 873x513 - cut-out: 840x480 Flush-mount: 873x513 - cut-out (FT): see web site up-mount cut-out (FTS): 860x500</p>  <p>External dimensions refer to Flush-mount version</p> <p>Power supply: 220-240 V 50-60 Hz</p>
			7205 032	
		available until exhaustion		
			7206 032	
				
			7206 082	
	<p>version vintage</p> 			

Ultra-flat grids






The sturdy cast iron grids form a single surface on which you can move pans easily and in complete safety.

5 kW burner

FL cooker hob feature a powerful 5kw burner with two totally independent crown of flames, controlled by two different knobs.



FL

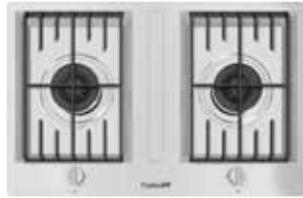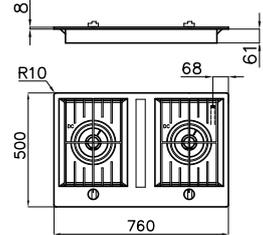	Features	Version	Ref.		Technical Drawing
	<p>AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power 10.000 W dual AE: 2x5.000 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>		<p>7203 032</p>		<p>Standard: 760x500 - cut-out: 740x480</p> 
<p>Supplied with: 2x  (see page 218)</p>					<p>Power supply: 220-240 V 50-60 Hz</p>
	<p>AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power 2.750W auxiliary: 1.000 W semi-rapid: 1.750 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>		<p>7209 032</p>	<p>available until exhaustion</p>	<p>Flat-edge: 353x513 - cut-out: 320x480 Flush-mount: 353x513 - cut-out (FT): see web site up-mount cut-out (FTS): 340x500</p> 
			<p>7208 032</p>		<p>Power supply: 220-240 V 50-60 Hz</p>
	<p>AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power 5.000 W dual AE: 5.000 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>		<p>7204 032</p>	<p>available until exhaustion</p>	<p>Flat-edge: 353x513 - cut-out: 320x480 Flush-mount: 353x513 - cut-out (FT): see web site up-mount cut-out (FTS): 340x500</p> 
<p>Supplied with:  (see page 218)</p>			<p>7207 032</p>		<p>Power supply: 220-240 V 50-60 Hz</p>



Thanks to the powerful and versatile AE Dual burner, the FL domino is a complete hob even with its single burner. It is possible to supply little power for a single-cup moka, or up to 5000 W to boil water or cook with a wok.



On FL cooker hobs, AE dual is even more flexible thanks to a twin-knobs system that allows to have the two completely independent crowns of flames.

KE

QUALITY OF FORM AND SUBSTANCE



 **New generation hobs.**
Up to 20% energy saving

Features	Version	Ref.	Technical Drawing
----------	---------	------	-------------------




AISI 304 brushed
Cast iron grids and
enamelled burner
covers
Tot. power: 9.500 W
auxiliary: 2x1.100 W
semi-rapid: 2x1.750 W
triple crown: 3.800 W

Electric ignition

Safety valves
with ultra-rapid
thermocouples

 **7603 032**

Standard: **860x500** - cut-out: **840x480**

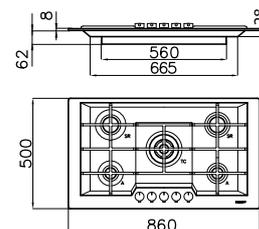

Accessories: **2** (see page 218)

Power supply: 220-240 V 50-60 Hz




AISI 304 brushed
Cast iron grids and
enamelled burner
covers
Tot. power: 9.500 W
auxiliary: 2x1.100 W
semi-rapid: 2x1.750 W
triple crown: 3.800 W

Electric ignition

Safety valves
with ultra-rapid
thermocouples

 **7602 032**

Standard: **790x500** - cut-out: **750x480**



Accessories: **2** (see page 218)

Power supply: 220-240 V 50-60 Hz



AISI 304 brushed
Cast iron grids and
enamelled burner
covers
Tot. power: 9.500 W
auxiliary: 2x1.100 W
semi-rapid: 2x1.750 W
triple crown: 3.800 W

Electric ignition


Safety valves
with ultra-rapid
thermocouples

 **7600 032**

 **7601 032**



Flat-edge: **803x513** - cut-out: **770x480**
Flush-mount: **803x513** - cut-out (FT):
see web site
up-mount cut-out (FTS): **790x500**



Accessories: **2** (see page 218)




External dimensions refer to
Flush-mount version
Power supply: 220-240 V 50-60 Hz

KE Black

A SPORTY AND GRITTY DESIGN



 **New generation hobs.**
Up to 20% energy saving

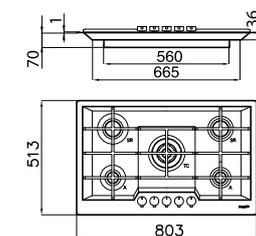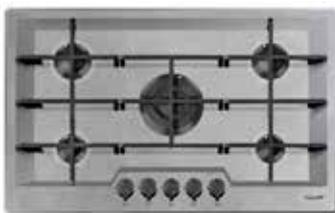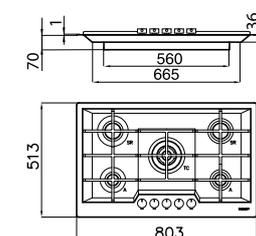	Features	Version	Ref.	Technical Drawing
 <p>Accessories: 2 (see page 218)</p>	<p>AISI 304 brushed Cast iron grids, gun metal burners and enamelled burner covers Tot. power: 9.500 W auxiliary: 2x1.100 W semi-rapid: 2x1.750 W triple crown: 3.800 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	<p> FT  FTS</p>	<p>7600 666</p>	<p>Flush-mount:803x513 - cut-out (FT): see web site up-mount cut-out (FTS): 790x500</p>  <p>Power supply: 220-240 V 50-60 Hz</p>
 <p>Accessories: 2 (see page 218)</p>	<p>AISI 304 Vintage Cast iron grids, gun metal burners and enamelled burner covers Tot. power 9.500 W auxiliary: 2x1.100 W semi-rapid: 2x1.750 W triple crown: 3.800 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	<p> FT  FTS</p> <p>vintage versions </p>	<p>7601 082</p>	<p>Flush-mount:803x513 - cut-out (FT): see web site up-mount cut-out (FTS): 790x500</p>  <p>Power supply: 220-240 V 50-60 Hz</p>

KE Black is also available in
Vintage-finish version.



KE COLORS

THE ELEGANCE OF KE HOB IN NEW EXCLUSIVE FINISHES.



New generation hob.
Up to 20% energy saving



Features

Version

Ref.

Technical Drawing

AISI 304 **Gold**
Cast iron grids,
gun metal burners
and enamelled
burner covers
Tot. power 9.500 W
auxiliary: 2x1.100 W
semi-rapid: 2x1.750 W
triple crown: 3.800 W




7601 932

Electric ignition

Safety valves
with ultra-rapid
thermocouples

Filterop: **803x513** - cut-out (FT):
see web site
up-mount cut-out (FTS): **790x500**

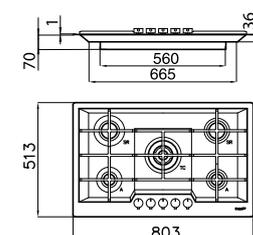

Power supply: 220-240 V 50-60 Hz

Accessories: **2** (see page 218)



AISI 304 **Copper**
Cast iron grids,
gun metal burners
and enamelled
burner covers
Tot. power 9.500 W
auxiliary: 2x1.100 W
semi-rapid: 2x1.750 W
triple crown: 3.800 W




7601 866

Electric ignition

Safety valves
with ultra-rapid
thermocouples

Filterop: **803x513** - cut-out (FT):
see web site
up-mount cut-out (FTS): **790x500**

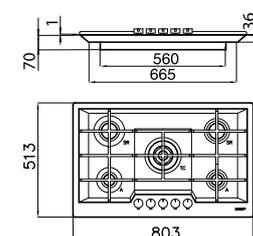

Power supply: 220-240 V 50-60 Hz

Accessories: **2** (see page 218)



AISI 304 **Gun Metal**
Cast iron grids,
gun metal burners
and enamelled
burner covers
Tot. power 9.500 W
auxiliary: 2x1.100 W
semi-rapid: 2x1.750 W
triple crown: 3.800 W




7601 632

Electric ignition

Safety valves
with ultra-rapid
thermocouples

Filterop: **803x513** - cut-out (FT):
see web site
up-mount cut-out (FTS): **790x500**

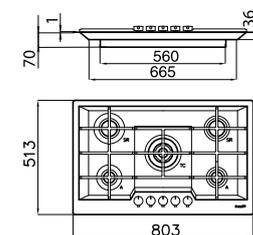

Power supply: 220-240 V 50-60 Hz

Accessories: **2** (see page 218)

KE Line

THE LINE IN A LIGHTWEIGHT AND ORIGINAL DESIGN




New generation hob.
Up to 20% energy saving



available until exhaustion

Accessories: **2** (see page 218)

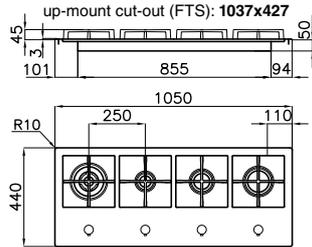Features	Version	Ref.	Technical Drawing
AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power: 9.650 W auxiliary: 1.100 W semi-rapid: 1.750 W rapid: 3.000 W triple crown: 3.800 W	 SF	7606 032	Flat-edge: 1050x440 - cut-out: 1030x420 Flush-mount: 1050x440 - cut-out (FT): see web site up-mount cut-out (FTS): 1037x427 
Electric ignition	 FT	7607 032	
Safety valves with ultra-rapid thermocouples	 FTS		

External dimensions refer to
Flat-edge version
Power supply: 220-240 V 50-60 Hz

A detail of the precious knob
and of the highly performing
burners of KE hobs.



KF Marine

A SUPER STEEL FOR A CHAMPION OF FUNCTIONALITY



Features	Version	Ref.	Technical Drawing
----------	---------	------	-------------------



available until exhaustion


Accessories: **2** (see page 218)

AISI 316
Stainless Steel
 Cast iron grids and enamelled burner covers
 Tot. power 10.700 W
 auxiliary: 1.000 W
 semi-rapid: 2x1.750 W
 rapid: 2.700 W
 triple crown: 3.500 W


Electric ignition

Safety valves with ultra-rapid thermocouples

 **STD** 7666 962

Strait cut-out 

Dimensions: **760x500** - cut-out: **560x480**

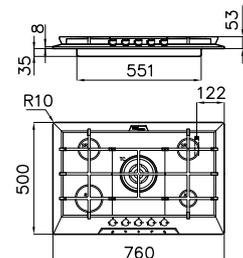

Power supply: 220-240 V 50-60 Hz
 Model which cannot be welded into stainless steel worktops



- **Superior resistance:**
- to sea-salt
- to detergents
- to acids contained in food

Foster
marine

Ideal for sea-side houses

Marine sinks see page 46-47





KS

REFINED ELEGANCE



 **New generation hobs.**
Up to 20% energy saving

	Features	Version	Ref.	Technical Drawing
	<p>AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power: 10.150 W auxiliary: 1.100 W semi-rapid: 3x1.750 W triple crown: 3.800 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>		<p>7610 032</p>	<p>Standard: 790x500 - cut-out: 750x480</p>  <p>Power supply: 220-240 V 50-60 Hz</p>
<p>available until exhaustion</p> <p>Accessories: 2 (see page 218)</p>				

	<p>AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power: 7.600 W auxiliary: 1.100 W semi-rapid: 2x1.750 W rapid: 3.000 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>		<p>7615 032</p>	<p>Standard: 590x500 - cut-out: 560x480</p>  <p>Power supply: 220-240 V 50-60 Hz</p>
<p>available until exhaustion</p>				

Sloped recess

The sloped recess conveys a modern, elegant touch besides facilitating the cleaning of the corners. A piece of highly refined workmanship to be found on both the KE and KS ranges.





Ceramik

CERAMIC GLASS AND GAS. A COMBINATION OF ELEGANCE, PRACTICALITY AND SAFETY.



 Flat burners
20% energy saving


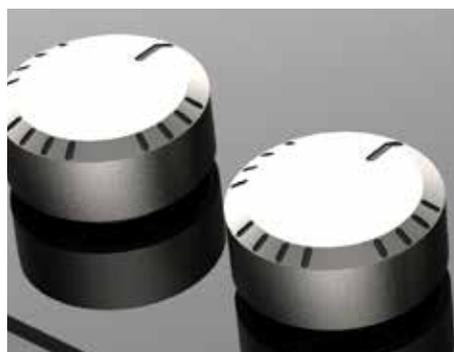
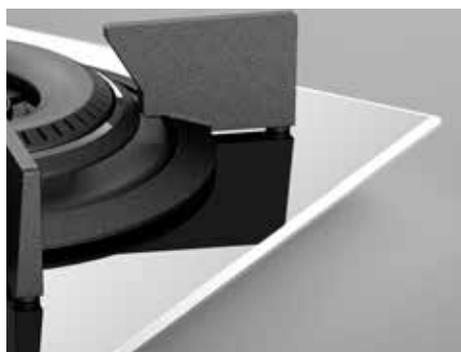


The profile of the hobs is embellished by an elegant 2 mm bevelled edge that makes it slimmer and suitable for a refined flush-mount installation.


The Flat burners have a limited height and an accurate design that facilitates cleaning operations. They are embellished by the double finish with a satin-finish steel ring.

The knobs have been designed to be perfectly coordinated with the aesthetics of the burners.

Ceramik

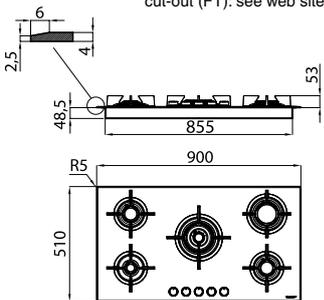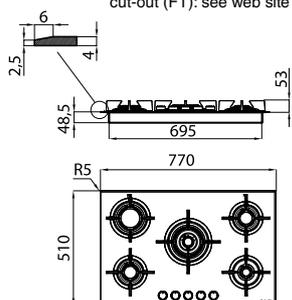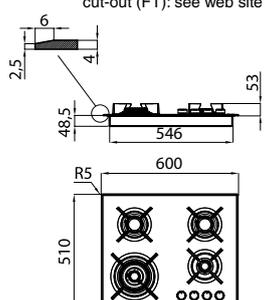Features	Version	Ref.	Technical Drawing
	<p>Black ceramic glass Cast iron grids and enamelled burner covers Tot. power 11.500 W auxiliary: 1.000 W semi-rapid: 2x1.750 W rapid: 3.000 W double crown: 4.000 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	 <p>7040 632</p> <p>*WARNINGS! The cut-out is not centred on the perimeter of the hob, check the technical data sheet on web site before cutting.</p>	<p>Dimensions: 900x510 - cut-out*: 860x480 cut-out (FT): see web site</p>  <p>Power supply: 220-240 V 50-60 Hz</p>
<p>Accessories: 2 (see page 218)</p>			
	<p>Black ceramic glass Cast iron grids and enamelled burner covers Tot. power 11.500 W auxiliary: 1.000 W semi-rapid: 2x1.750 W rapid: 3.000 W double crown: 4.000 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	 <p>7039 632</p> <p>*WARNINGS! The cut-out is not centred on the perimeter of the hob, check the technical data sheet on web site before cutting.</p>	<p>Dimensions: 770x510 - cut-out*: 700x480 cut-out (FT): see web site</p>  <p>Power supply: 220-240 V 50-60 Hz</p>
<p>Accessories: 2 (see page 218)</p>			
	<p>Black ceramic glass Cast iron grids and enamelled burner covers Tot. power 8.500 W auxiliary: 1.000 W semi-rapid: 2x1.750 W double crown: 4.000 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>	 <p>7038 632</p>	<p>Dimensions: 600x510 - cut-out*: 560x480 cut-out (FT): see web site</p>  <p>Power supply: 220-240 V 50-60 Hz</p>
<p>Accessories: 2 (see page 218)</p>			

Much more than a tempered glass


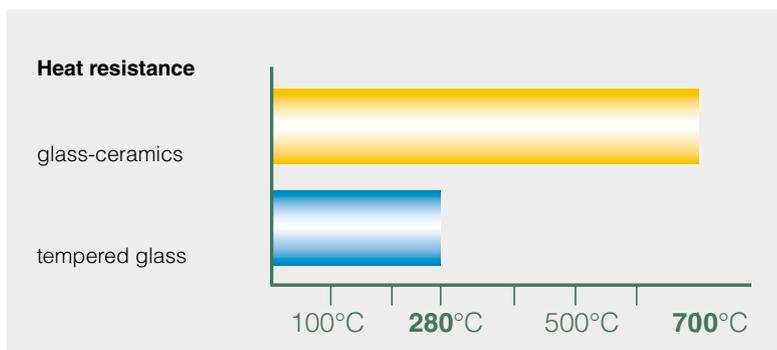


The top of the Ceramik hobs is made of glass-ceramics and not of tempered glass, like most of the gas hobs of this type. This ensures a greater resistance to high temperatures, thus preventing any possibility of glass explosion.


Professionale

A PERFORMING AND PRACTICAL EVERGREEN

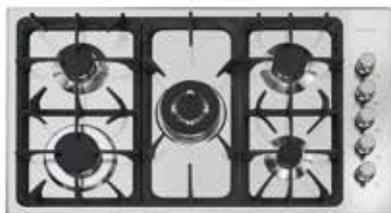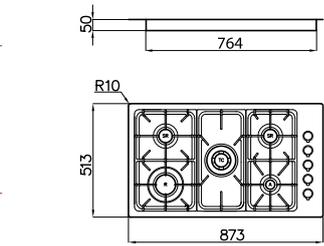

	Features	Version	Ref.		Technical Drawing
	<p>AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power: 10.700 W auxiliary: 1.000 W semi-rapid: 2x1.750 W rapid: 2.700 W triple crown: 3.500 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>		7055 062		<p>Standard: 860x500 - cut-out: 840x480 Flat-edge: 873x513 - cut-out: 840x480 Flush-mount: 873x513 - cut-out (FT): see web site up-mount cut-out (FTS): 860x500</p>
			7246 062	<p>available until exhaustion</p>	
			7245 062		<p>External dimensions refer to Flush-mount version Power supply: 220-240 V 50-60 Hz</p>
					


Accessories: **1 3** (see page 218)



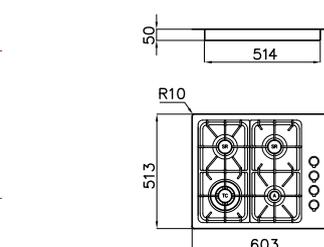
	<p>AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power: 8.000 W auxiliary: 1.000 W semi-rapid: 2x1.750 W triple crown: 3.500 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>		7053 062		<p>Standard: 590x500 - cut-out: 560x480 Flat-edge: 603x513 - cut-out: 560x480 Flush-mount: 603x513 - cut-out (FT): see web site up-mount cut-out (FTS): 590x500</p>
			7244 062	<p>available until exhaustion</p>	
			7243 062		<p>External dimensions refer to Flush-mount version Power supply: 220-240 V 50-60 Hz</p>
					

Accessories: **1** (see page 218)

Veronika

THE PRACTICALITY OF A STREAMLINED, FLAT HOB

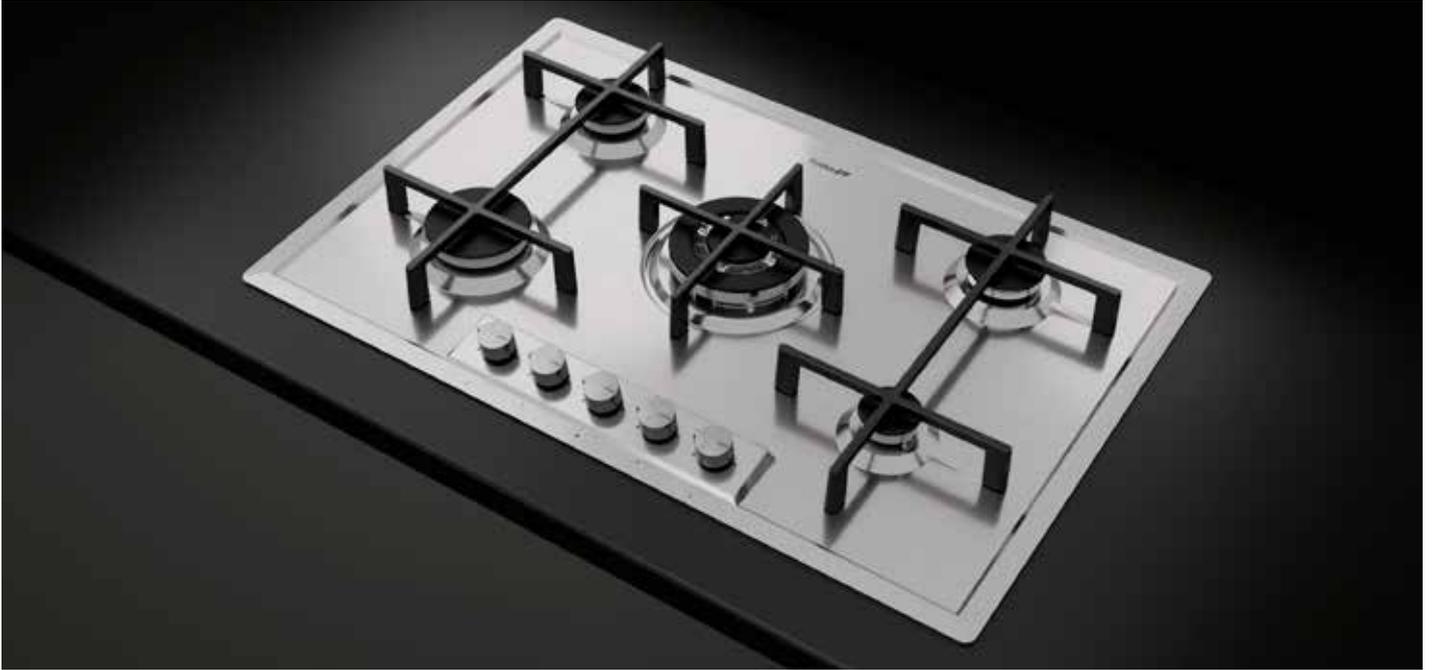




	Features	Version	Ref.	Technical Drawing
 <p data-bbox="97 1337 367 1364">Accessories: 2 (see page 218)</p>	<p data-bbox="544 999 715 1088">AISI 304 brushed Cast iron grids and enamelled burner covers</p> <p data-bbox="544 1090 715 1202">Tot. power: 10.700 W auxiliary: 1.000 W semi-rapid: 2x1.750 W rapid: 2.700 W triple crown: 3.500 W</p> <p data-bbox="544 1223 671 1247">Electric ignition</p> <p data-bbox="544 1267 671 1335">Safety valves with ultra-rapid thermocouples</p>		<p data-bbox="852 1034 938 1059">7067 062</p> <div data-bbox="1074 1254 1198 1357" style="border: 1px solid black; padding: 5px; display: inline-block;"> <p data-bbox="1114 1294 1158 1319">56x48</p> </div> <p data-bbox="952 1337 1064 1361">Strait cut-out</p>	<p data-bbox="1251 985 1522 1010">Standard: 760x500 - cut-out: 560x480</p>  <p data-bbox="1262 1281 1522 1323">Model which cannot be welded into stainless steel worktops</p> <p data-bbox="1275 1337 1522 1361">Power supply: 220-240 V 50-60 Hz</p>
	<p data-bbox="544 1393 699 1482">AISI 304 brushed Cast iron grids and enamelled burner covers</p> <p data-bbox="544 1485 715 1574">Tot. power: 7.200 W auxiliary: 1.000 W semi-rapid: 2x1.750 W rapid: 2.700 W</p> <p data-bbox="544 1594 671 1619">Electric ignition</p> <p data-bbox="544 1639 671 1706">Safety valves with ultra-rapid thermocouples</p>		<p data-bbox="852 1429 938 1453">7066 052</p>	<p data-bbox="1246 1379 1522 1404">Standard: 590x500 - cut-out: 560x480</p>  <p data-bbox="1262 1675 1522 1718">Model which cannot be welded into stainless steel worktops</p> <p data-bbox="1275 1731 1522 1756">Power supply: 220-240 V 50-60 Hz</p>
	<p data-bbox="544 1809 699 1899">AISI 304 brushed Cast iron grids and enamelled burner covers</p> <p data-bbox="544 1901 715 1991">Tot. power: 5.850 W auxiliary: 1.100 W semi-rapid: 1.750 W rapid: 3.000 W</p> <p data-bbox="544 2011 671 2036">Electric ignition</p> <p data-bbox="544 2056 671 2123">Safety valves with ultra-rapid thermocouples</p>		<p data-bbox="852 1823 938 1848">7063 052</p>	<p data-bbox="1246 1774 1522 1798">Standard: 440x500 - cut-out: 420x480</p>  <p data-bbox="1270 2119 1522 2143">Power supply: 220-240 V 50-60 Hz</p>



New generation hob.
Up to 20% energy saving


ERGONOMICS AND FUNCTIONALITY





	Features	Version	Ref.		Technical Drawing
	<p>AISI 304 brushed Cast iron grids and enamel burner covers Tot. power: 11.700 W limited semi-rapid: 1.400 W semi-rapid: 2x1.750 W rapid: 2.800 W double crown: 4.000 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>		<p>7016 032</p>		<p>Dimension: 860x500 - cut-out: 840x480</p>  <p>Power supply: 220-240 V 50-60 Hz</p> <p>Model which cannot be welded into stainless steel worktops</p>
	<p>AISI 304 brushed Cast iron grids and enamel burner covers Tot. power: 10.900 W auxiliary: 1.000 W semi-rapid: 1.750 W rapid: 2.800 W limited semi-rapid.: 1.400 W double crown: 4.000 W Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>		<p>7015 032</p>	<p>Strait cut-out</p> 	<p>Dimension: 750x500 - cut-out: 560x480</p>  <p>Power supply: 220-240 V 50-60 Hz</p> <p>Model which cannot be welded into stainless steel worktops</p>
	<p>AISI 304 brushed Cast iron grids and enamel burner covers Tot. power: 9.550 W auxiliary: 1.000 W semi-rapid: 1.750 W rapid: 2.800 W double crown: 4.000 W</p> <p>Electric ignition</p> <p>Safety valves with ultra-rapid thermocouples</p>		<p>7014 032</p>		<p>Dimension: 580x500 - cut-out: 560x480</p>  <p>Power supply: 220-240 V 50-60 Hz</p> <p>Model which cannot be welded into stainless steel worktops</p>

Elettra

CHAMPION OF CONVENIENCE

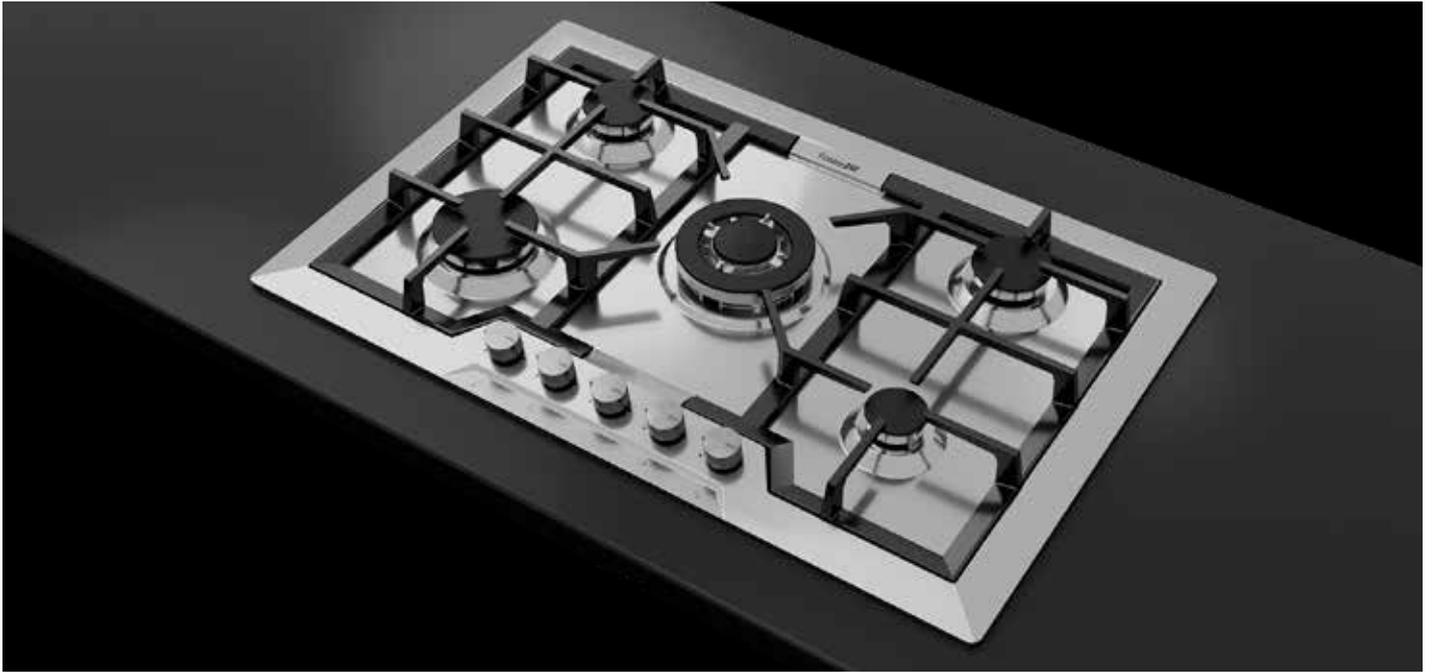

	Features	Version	Ref.	Technical Drawing
 <p data-bbox="94 1332 359 1366">Accessories: 1 (see page 218)</p>	<p data-bbox="534 996 730 1198">AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power: 10.700 W auxiliary: 1.000 W semi-rapid: 2x1.750 W rapid: 2.700 W triple crown: 3.500 W</p> <p data-bbox="534 1220 730 1243">Electric ignition</p> <p data-bbox="534 1265 730 1332">Safety valves with ultra-rapid thermocouples</p>		<p data-bbox="837 1030 933 1064">7064 062</p> <div data-bbox="1069 1243 1189 1355" style="border: 1px solid black; padding: 5px; display: inline-block;"> <p>56x48</p> </div> <p data-bbox="949 1332 1061 1355">Strait cut-out</p>	<p data-bbox="1244 985 1516 1008">Standard: 760x500 - cut-out: 560x480</p>  <p data-bbox="1244 1299 1516 1355">Model which cannot be welded into stainless steel worktops Power supply: 220-240 V 50-60 Hz</p>
	<p data-bbox="534 1388 730 1579">AISI 304 brushed Cast iron grids and enamelled burner covers Tot. power: 7.200 W auxiliary: 1.000 W semi-rapid: 2x1.750 W rapid: 2.700 W</p> <p data-bbox="534 1590 730 1612">Electric ignition</p> <p data-bbox="534 1635 730 1702">Safety valves with ultra-rapid thermocouples</p>		<p data-bbox="837 1422 933 1456">7068 042</p>	<p data-bbox="1244 1377 1516 1400">Standard: 590x500 - cut-out: 560x480</p>  <p data-bbox="1244 1691 1516 1747">Model which cannot be welded into stainless steel worktops Power supply: 220-240 V 50-60 Hz</p>


Smart grids

A detail of sturdy square grids of Elettra hob: just two symmetrical grids create the support for all the five burners.



Angolare

THE CORNER IN A PROFESSIONAL STYLE

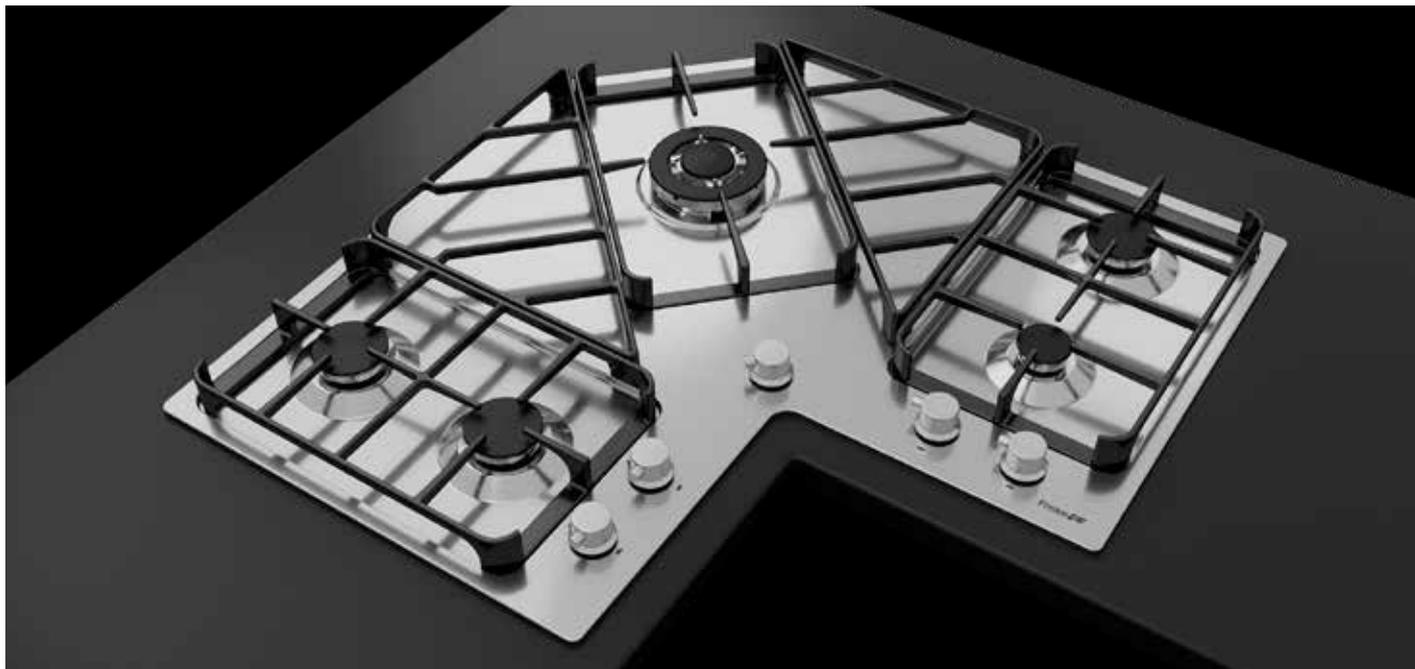

Features

Version

Ref.

Technical Drawing

Standard: 830x830 - cut-out: see web site




 STD 7038 052

AISI 304 brushed
Cast iron grids and
enamelled burner
covers
Tot. power: 9.750 W
auxiliary: 1.000 W
semi-rapid: 3x1.750 W
triple crown: 3.500 W

Electric ignition

Safety valves
with ultra-rapid
thermocouples

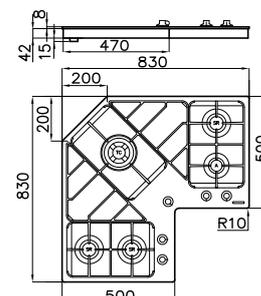

Power supply: 220-240 V 50-60 Hz

Accessories: **1** (see page 218)

The perfect cooking corner

Foster's Angolare hob maximizes space thanks to the cast iron "pan-support" zones that create a continuous surface with the grids on cooking zones.





OVENS AND COORDINATES

High technology modular systems

S4001
ovens
p. 252



S4001
Combi Steam
p. 252



S4001
Micro Combi
p. 253



S4001
Plate-warmer
module
p. 253



FL 90 oven
p. 254



FL 90 Vintage
oven
p. 255



Blast Chiller
Skin
p. 256

NEW



Vacuum Dower
Skin
p. 258

NEW



KE
Ovens
p. 260

NEW



KE
Micro-Combi
p. 261



KE 90
Ovens
p. 262



Stainless Steel
Plate-warmer
p. 262



KS
Ovens
p. 263

NEW



KS
Micro+Grill
p. 263



Features



Easy-Clean enamelling

The Easy-Clean enamelling makes the internal oven surfaces and accessories non-adhesive, while the limited porosity ensures durability and easy cleaning.



Soft-closing door

In the FL One Touch oven every detail is taken care of. The door's hinges automatically slow down in the final part of their movement, to achieve a delicate and silent closing.



Extractable telescopic guides

Most of Foster ovens feature telescopic guides on three levels which improve space distribution and ensure easy and safe extraction of grids and pans.



Stop Sol glass

The special screening and mirroring treatment of external glass gives the oven an elegant and modern aesthetic.



Cooking chamber capacity

Foster ovens top their category for guaranteed capacity. **XL** means that those models feature a capacity exceeding 60 litres. **XXL** indicates ones with out-of-standard size.



Multilevel cooking

The special ventilation makes the temperature uniform and avoids the mixing of smells, thus allowing to cook different kinds of food at the same time.




Heat probe

It records the temperature of the product. Once the temperature has been set, the oven signals when the core of the food has reached it, and deactivates the heating elements.



Self-Cooking

An extensive recipe menu is available and you can turn into a good cook in a short time. Those who are already expert cooks can create their personal cook book by memorizing the recipes.

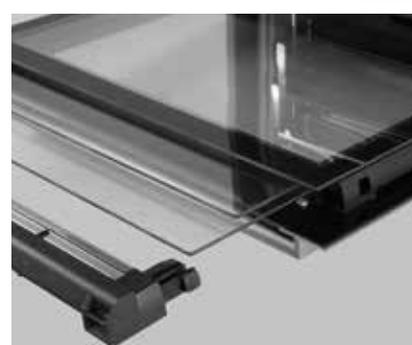

Removable glasses


The glass of the door of the oven can be removed for complete cleaning. In the picture the system of KE oven: the glass can be removed with a simple "click."

Features



Energy class

An oven range entirely in **A++**, **A+** and **A Class**. An important result which proves the high quality, targeted for performance and savings.

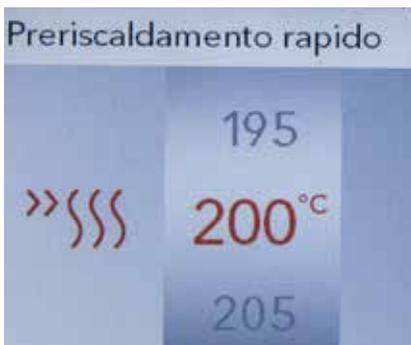

Fast preheating

This function turns on the heating elements and a flow of hot air raises the temperature to 200°C within a very short time.



Full-Glass door

In many models the inside of the oven door constitutes a single smooth glass surface making it practical for cleaning purposes.



Anti-touch finish

The new ovens are offered with the innovative anti-touch finish which, thanks to its special protection, safeguards the steel surfaces from the annoying fingerprints.



Thermal insulation and tangential fan

The tangential ventilation creates a flow of air between the muffle and framework, thereby reducing the temperature of the external surfaces. The oven does not expose furniture to temperature shock.



Triple glass door

All Foster ovens are equipped with a multiple glass door (up to 3 glasses, 4 for the pyrolytic models). This device ensures low temperatures of external surfaces and lower heat loss.



Multifunctional ovens cooking functions

The wide range of available programs allows Foster ovens to be performing in any situation: from delicate pastry cooking to the meat or pizza intensive ones.



- | | |
|--|--|
| <p> Bottom cooking
Suitable for heating foodstuffs.</p> <p> Upper-level cooking
Suitable for cooking particularly delicate foodstuffs and for keeping them warm after cooking</p> <p> Traditional cooking
The ideal function for all traditional recipes, including bread, cakes and roasts.</p> <p> Ventilated cooking
The combination of ventilation and circular heating elements allows for cooking different types of foodstuffs together, without mixing aromas and flavours.</p> <p> Intensive cooking
The upper and lower heating elements and the fan ensure rapid, uniform cooking. Ideal for cooking pizzas, roasts, lasagne and savoury pies.</p> <p> Bottom Cooking + Fan
Programme that ensures limited energy consumption, ideal for heating foodstuffs or for foodstuffs that require delicate, gradual cooking.</p> <p> Fast preheating
This function turns on the heating elements and a flow of hot air raises the temperature to 200°C within a very short time.</p> <p> Keep warm
Ideal to keep at the right temperature before serving.</p> <p> Low temperatures
Program for a slow and gentle cooking at contained temperatures.</p> <p> Bottom + Ventilated cooking
The combined action of the static heat from below and the ventilated one of the circular heating element, for deep cooking for thick foods.</p> | <p> Central grill
Ideal for toasting or cooking small portions au gratin.</p> <p> Double grill
Heat is generated by the upper grill only: ideal for toasting, cooking au gratin and browning foodstuffs and also suitable for meat, fish and pasta.</p> <p> Bottom cooking + grill
To complete static cooking and to cook au gratin simultaneously.</p> <p> Bottom cooking + double grill
To complete the static cooking giving the right crispiness to preparations.</p> <p> Fan + grill
The combined action of the fan and grill produces rapid and thorough cooking of thick foodstuffs.</p> <p> Fan + double grill
For the final stages of cooking of foods such as roasts and poultry, to give the surfaces the right browning.</p> <p> Defrosting
Allows for thawing foodstuffs in one-third of the normal time through uniform distribution of the air at ambient temperature.</p> <p> Pizza function
The combination of lower-level, ventilated and grill cooking allows for obtaining a crisp, optimally done pizza.</p> <p> Grill+Spit
The grill and spit combination produces perfect browning of foodstuffs.</p> <p> Eco
It cooks with minimal energy consumption. It uses forced convection heating and stops the operation a few minutes before the end of cooking, exploiting the residual heat.</p> <p> Bottom + grill + fan
The uniformity of ventilated cooking accompanied by a crispy grill gratin.</p> |
|--|--|

Gas ovens cooking functions

- | | |
|--|---|
| <p> Ventilated and static gas cooking
The heat of the gas burner may or may not be accompanied by ventilation depending on the result to be obtained.</p> | <p> Grill
Heat is generated by an electrical resistance on the upper level: ideal for toasting, cooking au gratin and browning foodstuffs and also suitable for meat, fish and pasta.</p> |
|--|---|

Steam ovens cooking functions



The **S4001 combi steam oven** is a top-class product with excellent performances and great flexibility. It can be considered as a **gastronomic oven** thanks to a sophisticated technology deriving from professional solutions. Steam cooking is combined with convection and creates a complete set of programs ensuring excellent results for all dishes.

Here are the specialized cooking functions, which are added to the normal programs of a multifunction oven



Professional cooking (combined steam-cooking)

A mixed system combining the flow of warm air with steam to obtain tasty dishes just like a pro.



Regeneration

A programme specific for regenerating your dishes, using steam to replenish the proper humidity, combined with hot air between 70°C and 130°C.



Pure steam

The virtues of steam, to obtain a healthy and nutritious cooking. Perfect for all delicate dishes (vegetable, fish...) and for low-temp cooking (sous-vide or jar-cooking).

Combi Micro oven cooking functions



Three different microwave solutions.

The new **S4001** and **KE Combi models** are complete ovens, which add to microwaves and grill also convection cooking, making it possible an incredible set of cooking programs.

So much convenience for **KS micro+grill**, perfectly matched to the many steel ovens.



Microwave oven cooking

Ideal for cooking or rapidly heating vegetables, rice, fish, meat and liquids. Different power levels are available.



Automatic thawing

Allows for thawing foodstuffs by setting the latter's weight and type.



Convection microwave

The movement of air generated by the fan ensures better homogeneity of micro cooking.



Defrosting by time

Allows you to defrost by setting the duration of the process.



Micro+grill cooking

A combined cooking method that is ideal for lasagne, potatoes, roasts and pies.

S4001



Model	Finish	Ref.	Technical Drawing
-------	--------	------	-------------------

4001 Series
multifunctional 60x60-65 litres




satin anti-touch
anti touch
7131 054



- Multifunctional oven 60x60 cm, 65 litres capacity • 15 cooking functions • Touch controls • Display with intuitive electronic programming • Automatic cooking with programmed recipes • Heat probe for temperature control • Storable personal cookbook • customizable recipes • Fast-preheating function • Cooling system with tangential ventilation • 3 fully extractable telescopic guides • Door: 3-glazed • Soft Closing door • Black Mirror glass • Full-Glass door • Easy-Clean enamelling • Protection for grill heating element • Safety shut-off • Anti-touch finish • Independent inside light • Programming available in 12 languages • Demo mode • **Energy class: A++** • Power supply: 220-240 V 50-60 Hz

Standard accessories: 2 EasyClean enamelled trays - 1 stainless steel grid

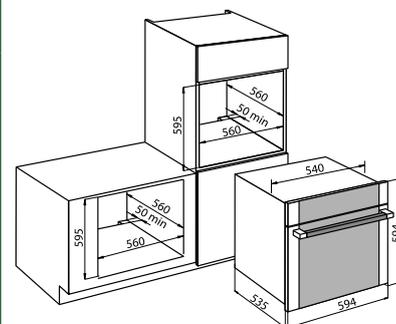

UPPER COOKING	BOTTOM COOKING	TRADIT. COOKING	FANNED COOKING	ECO FANNED COOKING	FANNED + GRILL	ENERGY SAVING	INTENSIVE COOKING	BOT. COOKING FANNED+GRILL	DOUBLE GRILL	CENTRAL GRILL	DEHYDRATION	DEFROSTING	PIZZA FUNCTION	CLEAN


4001 Series
combined steam 60x46 - 34 litres

satin anti-touch
anti touch
7135 081






- Combined steam oven 60x46 cm, 34 litres capacity • Controlled injection of steam in the cooking chamber • 8 cooking functions • Touch controls • Self Cooking electronic programming • Modifiable pre-programmed recipes • Heat probe for temperature control • Puff function • Cooling system with tangential ventilation • Assisted cleaning cycle for oven and steam piping • Door: 3-glaze • Black Mirror glass • Stainless steel cooking chamber • Anti-touch finish • Independent inside light • Programming available in 12 languages • Demo mode • **Energy class: A++** • Power supply: 220-240 V 50-60 Hz

Standard accessories: 1 2/3 Gastronorm h20 tray, 1 deep 2/3 gastronorm tray h40 with lid and stainless steel support grid, 1 stainless steel grid

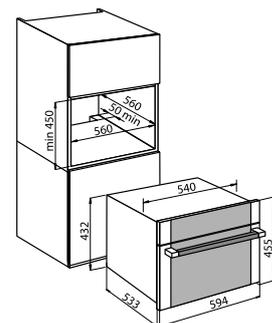

FANNED COOKING	FANNED COOK. +GRILL	STEAM COOK. 100 GRADES	STEAM COOK. 130 GRADES	FANNED COOK. +STEAM	GRILL	FANNED + GRILL	ECO

S4001

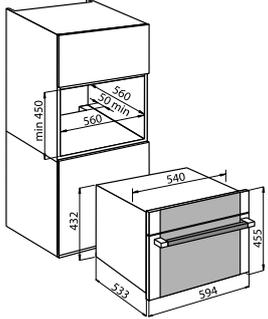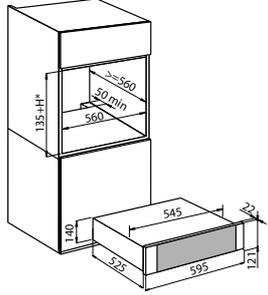Model	Finish	Ref.	Technical Drawing																		
<p>4001 Series micro combi 60x46 - 34 litres</p> 	<p>satin anti-touch </p> <p>7136 021</p> <p></p> <p>• 9 cooking functions • Microwave power 1000 W • Touch controls • Self Cooking electronic programming • Modifiable pre-programmed recipes • Automatic defrosting by time and weight • Cooling system with tangential ventilation • Black Mirror glass • Stainless steel cooking chamber • Anti-touch finish • Independent inside light • Power supply: 220-240 V 50 Hz</p> <p>Standard accessories: 1 Integrated rotating plate Ø 32 cm - 1 stainless steel round grid - 1 2/3 Gastronorm tray, h20 - 1 stainless steel grid</p>																				
<table border="1"> <tr> <td>FANNED COOKING</td> <td>FANNED COOK. +GRILL</td> <td>FANNED +GRILL</td> <td>GRILL</td> <td>DEFROSTING BY WEIGHT</td> <td>DEFROSTING BY TIME</td> <td>MICROWAVE COOKING</td> <td>MICROWAVE + GRILL</td> <td>MICROWAVE +FANNED COOK.</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>				FANNED COOKING	FANNED COOK. +GRILL	FANNED +GRILL	GRILL	DEFROSTING BY WEIGHT	DEFROSTING BY TIME	MICROWAVE COOKING	MICROWAVE + GRILL	MICROWAVE +FANNED COOK.									
FANNED COOKING	FANNED COOK. +GRILL	FANNED +GRILL	GRILL	DEFROSTING BY WEIGHT	DEFROSTING BY TIME	MICROWAVE COOKING	MICROWAVE + GRILL	MICROWAVE +FANNED COOK.													
																					
<p>4001 Series plate-warmer module - 60x14</p> 	<p>satin anti-touch </p> <p>7138 001</p> <p>• Module 60x14 cm • Slide-out drawers • Stainless steel inside, crystal base • Temperature: 40 - 70°C • Suitable to warm and maintain the temperature of food</p> <p>• Power supply: 220-240 V 50 Hz</p>		<p>Cut-out: 560x(140 mm + H oven cut-out)</p> 																		



Perfect alignment

The S4001 ovens are perfect to be installed horizontally, thanks to the alignment of handle and control panel on the 60 cm and 46 cm models (with warmer drawer)

FL 90



Model	Finish	Ref.	Technical Drawing
-------	--------	------	-------------------


FL Black Mirror - 90
multifunctional 90x48 - 91 litres

BLACK MIRROR 7107 642

Standard accessories:
deep tray
stainless steel grid



- Multifunctional oven 90x48 cm, 91 litres capacity
- 10 cooking functions
- Electronic programming of start-end of cooking
- Retractable selection knobs
- Collapsible double grill
- 2 telescopic guides
- Door: 3-glazed
- Chromed handle
- Full-Glass door
- StopSol glass
- Removable door glasses
- Easy-Clean enamelling
- Protection for grill heating element
- Cooling system with tangential ventilation
- Asymmetric double halogen light, light-on at door opening
- Door contact switch
- Energy class: A
- Power supply: 220-240V 50-60Hz

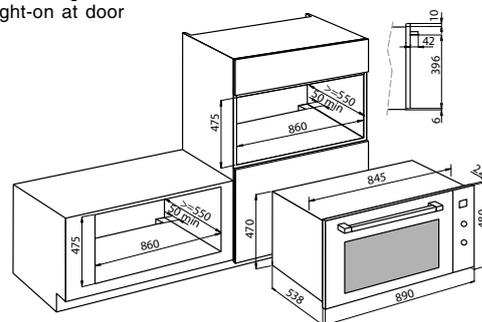

BOTTOM COOKING	TRADIT. COOKING	INTENSIVE COOKING	FANNED COOKING	CENTRAL GRILL	DOUBLE GRILL	BOTTOM COOK. + GRILL	FANNED + MAXI GRILL	FANNED + BOTTOM COOK.	DEFROSTING

FL 90 Vintage



Model	Finish	Ref.	Technical Drawing
-------	--------	------	-------------------


FL Vintage - 90
multifunctional 90x48 - 91 litres

VINTAGE ANTI-TOUCH  7107 042

Standard accessories:
deep tray
stainless steel grid



- Multifunctional oven 90x48 cm, 91 litres capacity • 10 cooking functions • Electronic programming of start-end of cooking
- Retractable selection knobs • Collapsible double grill • 2 telescopic guides • Door: 3-glazed • Black finish handle • Full-Glass door • Removable door glasses • Easy-Clean enamelling • Protection for grill heating element • Cooling system with tangential ventilation • Asymmetric double halogen light, light-on at door opening • Door contact switch
- Energy class: A
- Power supply: 220-240V 50-60Hz

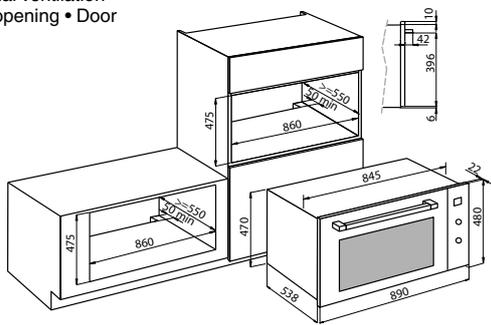


BOTTOM COOKING	TRADIT. COOKING	INTENSIVE COOKING	FANNED COOKING	CENTRAL GRILL	DOUBLE GRILL	BOTTOM COOK. + GRILL	FANNED + MAXI GRILL	FANNED + BOTTOM COOK.	DEFOSTING
									

Skin - multifunction blast chiller



The freezer preserves food but it is not suitable for deep-freezing. The blast chiller chills the product in a limited amount of time, enabling a micro-crystallization which preserves the organoleptic characteristics of food.

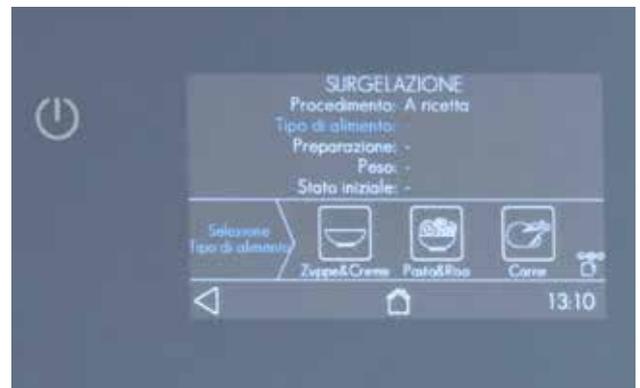

The FL blast chiller is simple and intuitive to use. Simple questions guide to set all parameters, even by a beginner.



The temperature probe is a useful accessory. It makes it possible to obtain a precise result at the end of the chilling or cooking process.



The blast-chiller and vacuum drawer are not only useful for conservation: they also allow the use of innovative cooking techniques, which thus become available also in your home kitchen.

Skin - multifunction blast chiller


Model	Finish	Ref.	Technical Drawing
-------	--------	------	-------------------

Skin blast chiller
multifunctional 60x46 - 40 litres

BLACK MIRROR 2980 601



- Built-in multifunction blast chiller 60x46 cm, volume 40 lt
- 11 programs
- TFT touch-control display
- Assisted intuitive programming
- Stainless steel chamber • LED lighting
- Over-temperature protection sensors
- Exercise temperature +75°C / -30°C
- Climate Class: SN

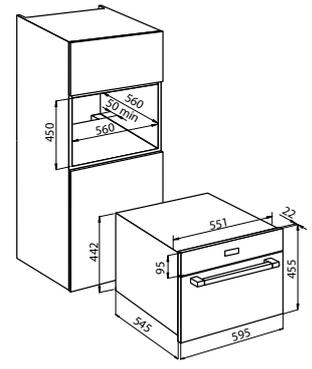

Standard features:
Temperature probe - high-temperature glass tray - steel grid
Power supply: 220-240V 50Hz - Maximum power: 300 W

Blast chiller functions



Temperature dropping to +3°C

It reduces the time of permanence in the bacteria proliferation temperature range, and increases the shelf-life of food. The quick drop in temperature also blocks water evaporation.



Deep-freezing at -18°C

It makes months long conservation possible. The organoleptic properties, savour, aroma and aspect of food remain unaltered because of the micro-crystallization of water which prevents fibres from breaking apart.



Rapid pre-chilling to optimize program-execution time

It reduces the time of execution of programs by chilling the inner parts of the appliance before use.



Rapid chilling of food after cooking

It is possible to accelerate the chilling process, down to the required temperature, without waiting for natural acclimatization.



Quick chilling of beverages to service temperature

This program quickly chills up to six bottles of beverage to the required temperature.



0°C conservation of prepared food

This program is suitable to preserve food such as meat, fish or vegetables for a few hours before their preparation.



Raw food sanitization through temperature drop to -30°C

Bad conservation of seafood can cause health hazards do to contamination with Anisakis, a parasite which can be eliminated with a deep-freezing at -30°C.



Controlled defrosting of deep-freeze food

The program brings food from deep-freeze temperature to 1÷3°C without losing its liquids and without commencing its cooking, and thus avoiding the transformation of proteins which is brought on by the microwave.



Food regeneration at serving temperature

This program warms at proper serving temperature food which was pre-cooked and kept in the refrigerator.



Low-temperature cooking

This function cooks food at a constant temperature for a given time. Thanks to the limited evaporation of water from the food, it maintains the quality and tenderness of the food.



Rising with temperature- and humidity-control

This program creates a micro-climate with controlled temperature and humidity in which fermentation can take place in a perfect environment. By programming the duration, it is possible to reduce the quantity of yeast, and obtain a lighter and easier to digest food.



Skin Vacuum Drawer



The culture of healthy cuisine

The vacuum technique brings high-quality raw materials to your table, preserved with perfect hygiene and prepared in a quick and economic way.



The real 99,9 % “sous-vide”

Foster's vacuum is based on the “bell” technology, the same used in professional appliances, which guarantees a very powerful vacuum (99,9%).



Marinated products, maturation and infusion

The Chef Sous-Vide function “massages” the food and facilitates the absorption of seasonings. It replicates processes like marinade, meat seasoning or infusion.



No waste of food

The set of optional containers is one of the few adapted to professional use. It is very useful to vacuum-seal foods and preparations which are prone to squashing.


Skin Vacuum Drawer

Model	Finish	Ref.	Price €	Technical Drawing
-------	--------	------	---------	-------------------

Skin Vacuum Drawer 60x14	BLACK MIRROR	2981 601	€ 2.482,00	
------------------------------------	--------------	----------	------------	--



- Built-in professional Vacuum Drawer 14 cm
- Tempered glass cover with safety treatment
- AISI 304 stainless steel tub – volume 6,5 lt.
- Push-push opening on guides – maximum opening 44 cm
- Stop-system on the open position of the drawer
- Three levels of air extraction (vacuum up to 99,9%)
- Double-phase sealing bar with three sealing levels
- Bar length: 260 mm
- Maximum size of bags: 25x35 cm
- Chef “Sous-Vide” function for marinades, seasoning and infusion
- Mode for vacuum creation in external containers
- Touch-control
- Cycle duration: 1 minute approx., depending on food type
- Control Sensor for a guaranteed level of vacuum
- Automatic pump dehumidification cycle
- Electric safety-valve of no-return for the pump-oil
- Maximum absorbed power: 230 W
- Power supply: 220-240 V 50-60 Hz

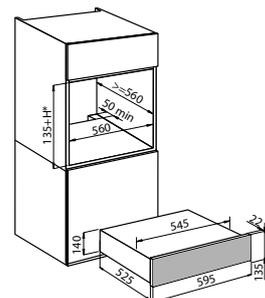

*Cut-out: 560x(140 mm + H oven cut-out)

accessories

- Kit of 25 bags for vacuum-preservation 20x30 cm
- Kit of 25 bags for vacuum-preservation 25x35 cm
- Kit of 25 bags for vacuum-cooking 20x30 cm
- kit of 25 bags for vacuum-cooking 25x35 cm
- kit of 3 containers for professional vacuum

Ref.	Prezzo €
8502 003	€ 10,00
8502 004	€ 14,00
8502 005	€ 15,00
8502 006	€ 16,00
8502 007	€ 93,00



Vacuum for solids and liquids

An important feature is that it can vacuum-pack also liquids. All your preparations can thus be put “sous-vide” to lengthen their shelf-life.



Double-phase sealing

The sealing tool operates on a double phase, ensuring an always perfect sealing. The three levels of sealing permit the use of bags with different thicknesses.



Three levels of vacuum

Not all preparations require a high degree of vacuum. Three different levels can be selected, plus the sealing function without air extraction




Preserve in easy-to-use mono-doses

The vacuum process makes it possible to spare time and money. One can cook multiple portions and vacuum single-dose jars directly in the appliance.


KE




KE

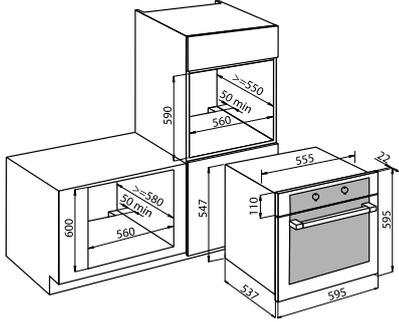Model	Finish	Ref.	Technical Drawing
KE series multifunctional 60x60 - 70 litres 	satin anti-touch 	7142 045	
<div style="display: flex; justify-content: space-between;"> <div style="display: flex; gap: 5px;"> A XL </div> <div style="display: flex; gap: 5px;">     </div> </div> <p> • Multifunctional oven 60x60 cm, 70 litres capacity • 10 cooking functions • Electronic programming of start and end of cooking • Soft-closing door • Cooling system with tangential ventilation • 3 telescopic guides • Door: 3-glazed • Full-Glass door • Removable door glasses • Easy-Clean enamelling • Protection for grill heating element • Anti-touch finish • Energy class: A • Power supply: 220-240 V 50-60 Hz </p> <p>Standard accessories: 1 tray and 1 drip tray with EasyClean enamelling XXL 1 stainless steel grid</p>			

BOTTOM COOKING	TRADIT. COOKING	VENTILATED COOKING	DOUBLE GRILL + FAN	INTENSIVE COOKING	BOTTOM + VENTILATED COOKING	DOUBLE GRILL	BOTTOM COOKING + FAN	BOTTOM COOK. + GRILL	DEFROSTING
									

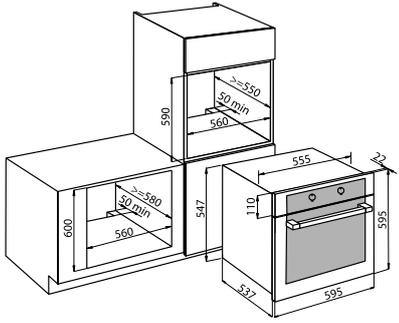KE series multifunctional 60x60 - 70 litres 	satin anti-touch 	7141 044	
<div style="display: flex; justify-content: space-between;"> <div style="display: flex; gap: 5px;"> A XL </div> <div style="display: flex; gap: 5px;">     </div> </div> <p> • Multifunctional oven 60x60 cm, 70 litres capacity • 8 cooking functions • Electronic programming of start and end of cooking • Soft-closing door • Cooling system with tangential ventilation • 1 telescopic guide • Door: 3-glazed • Full-Glass door • Removable door glasses • Easy-Clean enamelling • Protection for grill heating element • Anti-touch finish • Energy class: A • Power supply: 220-240 V 50-60 Hz </p> <p>Standard accessories: 1 tray and 1 drip tray with EasyClean enamelling XXL 1 stainless steel grid</p>			

BOTTOM COOKING	TRADIT. COOKING	INTENSIVE COOKING	BOTTOM COOK. + GRILL	DOUBLE GRILL	DOUBLE GRILL + FAN	FANNED + GRILL	BOTTOM COOKING + FAN
							

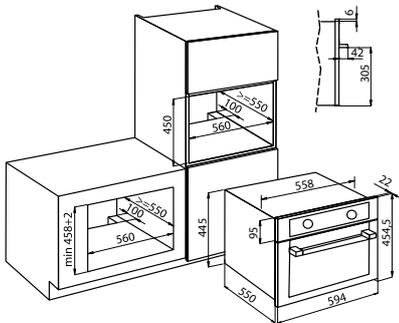Serie KE micro combi 60x46 - 44 litri 	satin anti-touch 	7146 022	
<div style="display: flex; justify-content: space-between;"> <div style="display: flex; gap: 5px;">      </div> </div> <p> • Forno combinato microonde + grill + ventilato 60x46 cm - 44 litri • Microonde 900 W • Resistenze 1750W • Temperatura max 230°C • 10 funzioni di cottura • Display LED con comandi touch-control / manopole • 15 programmi automatici pre-impostati • Finitura antitouch • Interno forno in acciaio inox • Porta: 3 vetri • Ventilazione tangenziale • Impostazione timer 0-90 minuti • Scongelo automatico per tempo e peso • Piatto girevole ø 36 cm • Interno porta Full Glass • Alimentazione: 230 V 50 Hz </p> <p>Dotazioni di serie: 2 griglie in acciaio inox (grill alto e basso) e 1 teglia rotonda smaltata</p>			

COTTURA MICROONDE	COTTURA CONVEZIONE	VENTOLA + GRILL	GRILL	VENTOLA + COTTURA SOTTO	MICROONDE + GRILL	MICROONDE + VENTOLA	MICROONDE + GRILL + VENT.	COTTURA INF. VENT. + MICROONDE	SCONGELAM. AUTOMATICO
									

KE 90

Model	Finish	Ref.	Technical Drawing
-------	--------	------	-------------------


KE 90
multifunctional 90x60 - 103 litres



satin anti-touch  7126 047



- Multifunctional oven 90x60 cm, 103 litres gross volume • 8 cooking functions • Electronic programming of start and end of cooking • Digital display • Cooling system with tangential ventilation • Door: 3-glazed • Full-Glass door
 - Easy-Clean enamelling • Protection for grill heating element • Independent inside light
 - Anti-touch finish • Power supply: 220-240 V 50-60 Hz
- Standard accessories:
2 grids and 1 enamelling drip tray

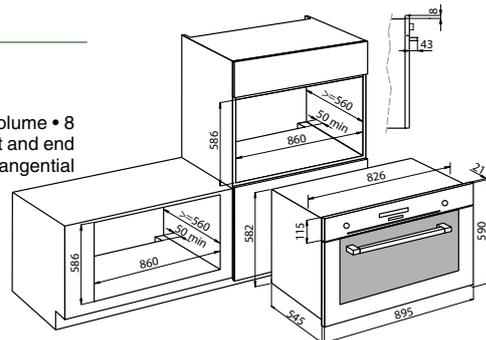

BOTTOM COOKING	TRADIT. COOKING	INTENSIVE COOKING	FANNED COOKING	CENTRAL GRILL	DOUBLE GRILL	FANNED + GRILL	FANNED COOKING +BOTTOM	ECO
								

KE 90 - GAS
ventilated gas 90x60 - 91 litres




satin anti-touch  7193 047



- Ventilated gas oven 90x60 cm, 91 litres gross volume • 4 cooking functions • Electric grill • Under knob ignition • Safety valves • End of cooking timer • Cooling system with tangential ventilation • Door: 3-glazed • Easy-Clean enamelling • Independent inside light • Power supply: 220-240 V 50-60 Hz

Standard accessories:
1 baking tray, 1 grill and 1 rotisserie spit

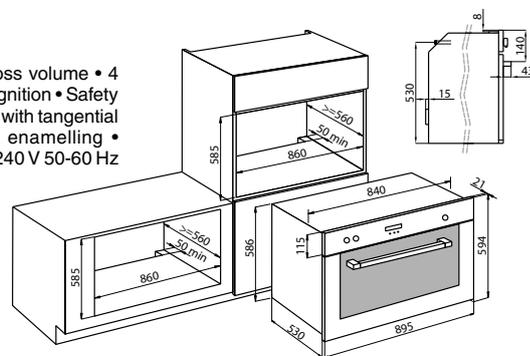

BOTTOM COOKING	ELECTRIC GRILL	FAN	SPIT
			

Plate-warmer module KE-KS


Model	Finish	Ref.	Technical Drawing
-------	--------	------	-------------------

KE-KS
Plate-warmer 60x14 - 24 litres



satin anti-touch  7104 000

- Push-pull opening with telescopic guides
- Stainless steel inner with non-slip coating
- Heating resistors with level control
- Max temperature: 85°C
- Maximum load: 15 kg
- Power supply: 220-240V 50-60Hz

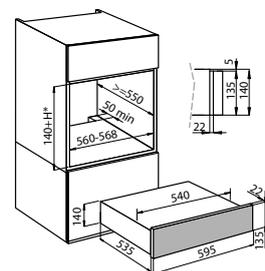

*Cut-ou: 560x(140 mm + H oven cut-out)

KS

Model	Finish	Ref.	Technical Drawing
-------	--------	------	-------------------

KS series
multifunctional PP 60x60 - 70 litres

NEW




satin anti-touch  7122 055



• Multifunctional oven 60x60 cm, 70 litres capacity • 8 cooking functions • End of cooking timer • Cooling system with tangential ventilation • Door: 2-glazed • Full-Glass door • Removable door glasses • Easy-Clean enamelling • Protection for grill heating element • Anti-touch finish • Energy class: A • Power supply: 220-240 V 50-60 Hz

Standard accessories: 1 tray and 1 drip tray with EasyClean enamelling XXL
1 stainless steel grid

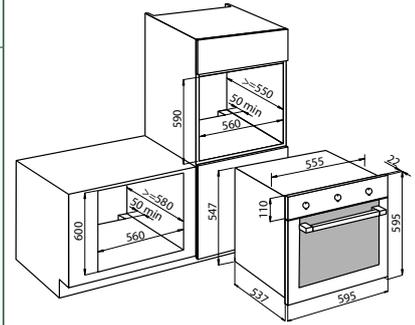

BOTTOM COOKING	TRADIT. COOKING	INTENSIVE COOKING	BOTTOM COOK. + GRILL	DOUBLE GRILL	FAN + DOUBLE GRILL	FANNED + GRILL	FANNED + BOTTOM COOK.
							


KS series
micro+grill 60x38 - 25 litres



satin anti-touch  7151 010

• Micro+grill 60x38 cm, 25 litres capacity • 5 cooking functions • 8 Self Cooking functions • 5 power settings up to 900 W (1000 W Grill) • Electronic programming • Automatic defrosting by time and weight • Stainless steel cooking chamber • Power supply: 230 V / 50 Hz

Standard accessories:
1 grid
1 rotating plate

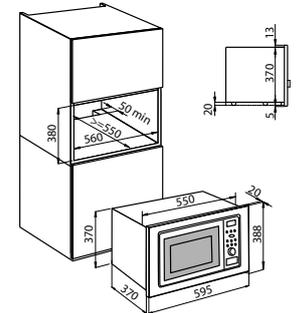

MICROWAVE COOKING	GRILL	MICROWAVE + GRILL	AUTOMATIC THAWING	PRE-SET PROGRAMMES
				



HOODS

Breeze
p. 272New Sky
p. 273Ghost
p. 274S4000
Domino Ghost
p. 276Domino Air
p. 277S4001 Special
p. 278S4001
p. 280Cilindro
p. 281FL Slim
p. 282Stripe
p. 283KS Lux
p. 284

KS p. 285

Florence
p. 286Pitagora
p. 287Amélie
p. 288New Wing
p. 289Flat
p. 290

A hood for every kitchen



Wall-mount hoods

A large range of choices in size, shape, materials and functionality.



Island hoods

For many models an island version is available, easy to install thanks to telescopic chimneys.



Ceiling-mount suction systems

Not mere hoods, but complete ventilation systems, engineered to improve the quality of the air.



Table hoods

Elegant and minimalistic solutions which perfectly match the Domino and In-line cooker hobs, both gas and induction.



Built-in hoods

These special solutions are craftily studied to disappear within the kitchen cabinets, nevertheless maintaining their own personality and functionality.



Custom-made hoods

Foster is able to manufacture bespoke products according to the customer's drawing, guaranteeing the best match between worktop and cooker hood.





Lighting



Particular attention to energy saving with LED lighting systems. They assure a 10 times lower consumption and a 10 times longer duration. Our LED lights are designed to create an adequate comfort and safety in the cooking area.



LED colour temperature selector

The colour temperature of the Breeze hood can be changed according to the environment in which it is inserted, so you can choose among a warm, natural or cold light.




LED Strip

The Ghost table hood is equipped with an LED strip that guarantees an extended and homogeneous illuminated area, despite the proximity of the source to the hob.



LED lighting plates

The Modular ceiling suction system is conceived to be able to be the kitchen main lighting source. It features high power, efficient LED lighting plates which guarantee a natural and comfortable lighting, while granting a considerable energy saving.

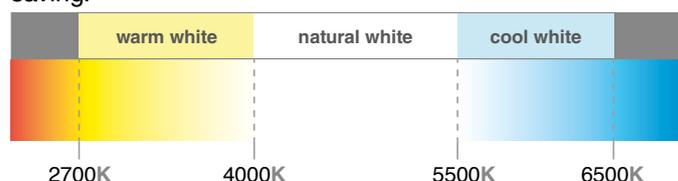

Colour temperature

The colour of light is very important for the welfare of a long living room like the kitchen. The LED lights of Foster hoods are neutral lights with a temperature close to natural light, particularly comfortable.

Silent power


Power and quietness are the two principal features of a cooker hood, even though they are often in contrast with one-another. All the Foster solutions have an outstanding suction power which makes them efficient and well-performing in all conditions of use, both in extracting and filtering modes.

High performance motors

The motors Foster hoods have a high suction capacity. Their refined design hides a powerful appliance with professional features.


Silent System motors

The new Silent System motors sport a very high efficiency leading to top suction-power coupled with reduced consumption and a noise-level 10 times lower compared to standard solutions.

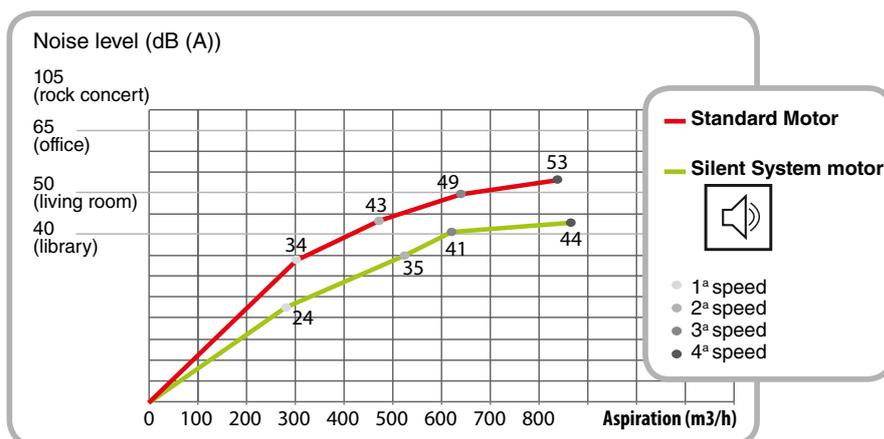


Filters

All the Foster hoods are, in their original configuration, suction hoods, and are equipped with grease, beehive, multilayer, anodized aluminium filters. Wherever it is not possible to install a suction hood, the addition of active carbon filters (available as accessory) can transform the hood in “filtering” hood.

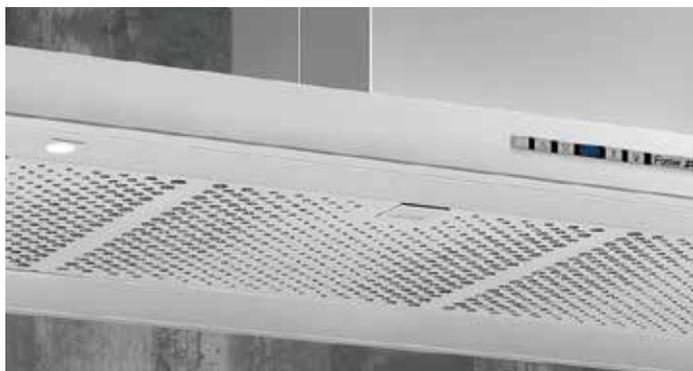

Remark: the grease filters can periodically be washed in the dishwasher in order to bring them back to their original filtering efficiency. It is however recommended to use a low-temperature programme (max. 40° C) to avoid any deformation and colour-change of the aluminium surfaces.

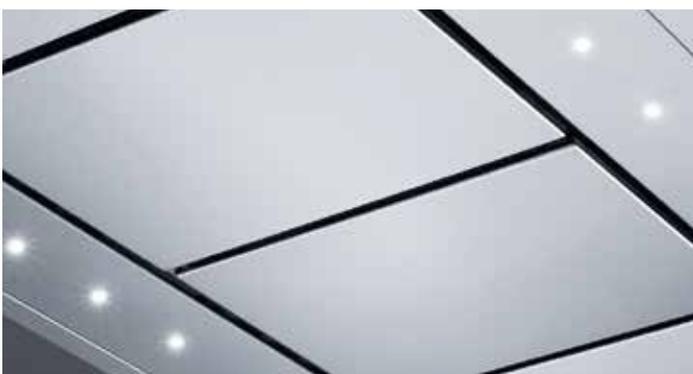

Digital control

Almost all Foster hoods are equipped with advanced electronic controls that allow a perfect control and improve the efficiency of the engines. The different solutions favour the aesthetic or functional aspect with additional functions such as digital thermometer and the timer, always useful for keep control of your preparations.




Remote control

The ceiling suction systems and the Maya hoods are equipped with a remote control to easily activate all their functions from any position.



Stainless steel filters

In many models, especially the ones where the filter is in plain sight, the aluminium filtering element is covered in stainless steel. This solution improves the look and increases the durability of the product.



Standard stainless steel filter

It guarantees an excellent filtering function, thanks to the double stainless steel filtering layer, and as many as five layers of aluminium beehive structure.



Hi-class stainless steel filter

It features a peculiar and elegant look, as well as heightened filtering power due to the seven-layer structure.



Perimeter suction

The perimeter suction is a feature common to many Foster hoods. The filters are hidden by steel- or crystal plates and the suction occurs along their perimeter. This has aesthetic advantages but also functional ones: the cleaning is easier, the suction power and noise-level are improved. The depression which occurs in the perimeter area facilitates in fact the suction of the particles composing the fumes.



Special functions



Auto Mode function

With the Auto function the hood has temperature sensors and it can automatically set the suction power according to the heat developed by the cooker hob underneath.



Off-Timer

All the models with electronic interface can be programmed to turn off the suction at a postponed moment, so as to prolong the aeration of the room even after the cooking has been completed.



Filter-cleaning alarm

This function keeps track of the hours of use of the hood and signals the need to wash the filters in order to maintain the perfect efficiency of the hood.



Brushless motor

State-of-the-art Brushless motors allow high air flow rates while maintaining a low energy consumption. Furthermore, they have an almost never-ending duration.



Swiveling or four-exit-position motors

Swiveling or four-exit motors are flexible systems that allow an easy installation, in any situation.



Thin encumbrance

Foster ceiling-mount ventilation systems require little space. The icon appears next to models that require less than 20 cm between the concrete ceiling and the countertop.



50 cm distance

This hood is approved to be inserted even at a much lower distance than normal from the floor, up to 50 cm, all to the benefit of its suction efficiency.

Choice suggestions

The correct choice of power and kind of installation are important in order to achieve good performances, efficiency, noise-level and consumption. In order to avoid possible mistakes when buying, we list hereafter some suggestions to make the choice easier.



Choice of the flow capacity



The suction power of the hood must be correctly dimensioned compared to the volume of the room in which it is installed, in order to ensure a correct air circulation. The optimal air flow can be calculated by multiplying the volume of the room by 12 (number of complete air volume replacements in one hour). For ceiling suction systems it is recommended to calculate an air replacement of 15 cycles/hour.

m^2 Kitchen area	x	h Kitchen height	x	12 Number of complete air replacements per hour
=				
m^3/h Air flow (necessary suction power)				

Choice suggestions

Positioning on the cooker hob

The optimal height above the cooker hob is 65 cm and anyway comprised between 60 and 70 cm. For wall hoods with inclined suction surface (Garage hoods excluded), this height is determined starting from the median point of the filtering area.

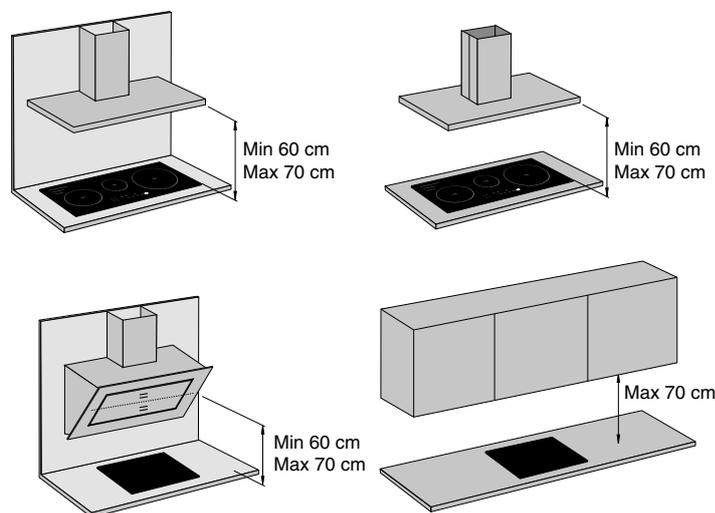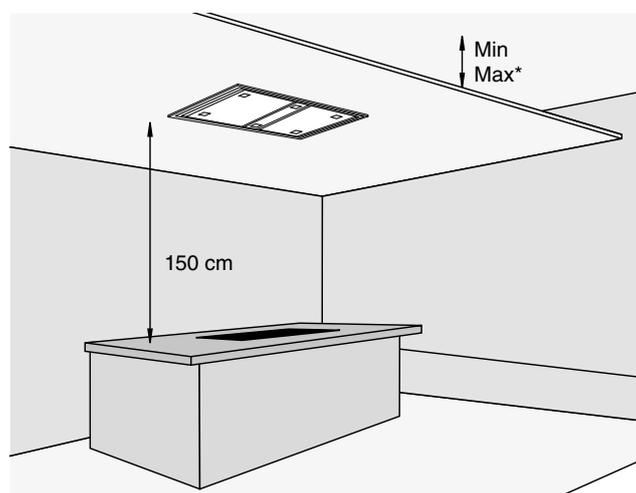

For the ceiling systems a ceiling-panelling height of maximum 150 cm from the cooker hob is recommended. The fixing systems of the hood makes it possible to regulate the distance between ceiling and panelling, based on specific needs. *See min. and max. dimensions for each specific model.


Width of hood

The dimension of the hood must be adapted to the size of the cooker hob underneath. A slightly larger hood compared to the hob will ensure an optimized suction.

Placement of pipelines

It is advisable to foresee extraction air ducts as straight as possible, without bends or corners. A tortuous extraction duct will determine a loss of suction power and therefore a less-than-optimal performance. Moreover, it is important not to connect the air exit-duct with chimneys of other appliances or heating boilers.

Connect the outlet for the air extracted by the hood to fumes discharge ducts with a suitable internal diameter, and no less than 120 mm.

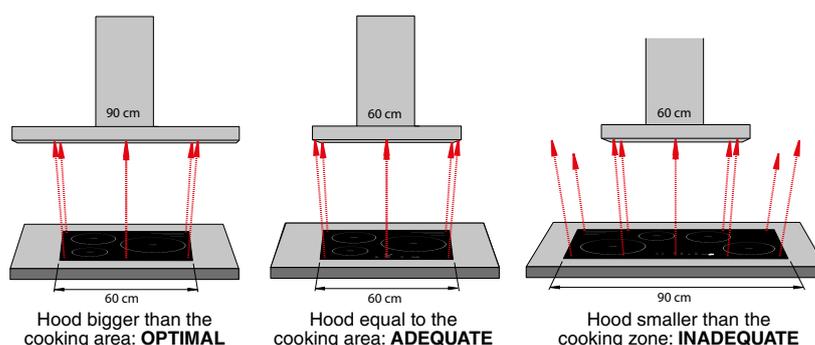

Air currents

In order for the hood to perform efficiently it is important to position it in a place not subject to air streams.

Canalization systems

Space-saving channel system with rectangular section.

For ceiling hoods **Breeze** and **New Sky** and for the extractor hobs **Foster Milano AIR**, **Milanello AIR** and **Domino AIR**.



9700 532

White tube with rectangular section 222x89 mm

dim: 222x89x1000 mm



9700 537

Rectangular/round adapter: Section 227x94 mm / ø 158 mm

dim: 190x 150x227 mm



9700 533

White connector with rectangular section 227x94 mm

dim: 227x94x80 mm



2541 000

3 meters (9,84 ft) white flexible tube with rectangular section



9700 534

Horizontal 90° Corner connector with rectangular section: 227x94 mm

dim: 288x288x94 mm



9700 538

Non-return valve ø 148 mm



9700 535

Vertical 90° Corner connector with rectangular section: 227x94 mm

dim: 174x174x227 mm



9700 539 *

gray grid for 100/150 mm bases

dim: 273x150 mm



9700 536

Horizontal 15° Corner connector with rectangular section: 227x94 mm

dim: 233x138x94 mm



9700 574 *

carbon filter for 100-150 mm plinth

9700 575 *

Active charcoal refill for Plinth filter

* only for extractor hobs **Milano AIR** e **Domino AIR**

Space-saving channel system with circular section

For **island hoods**, **wall hoods**, **built-in hoods** and **table hood Ghost**.



9700 602

Flexible silencing canalization 10 mt. - ø 120 mm

9700 603

Flexible silencing canalization 10 mt. - ø 150 mm

Breeze



A+
CLASS



Ref.

Technical Drawing

Breeze inox

2537 001
100 cm


Ceiling suction hood
Finish: **stainless steel**
Remote control included
3 grease filters
4 speeds
Illumination 2 LED strip
(2.700/4.000/5.500 kelvin)
Perimetric aspiration
Automatic delayed shutdown

Air flow rate: **930 m³/h**
Air exhaust hole: 230x80 mm
Motor power: 85 W
Silence Plus motor
360° Swiveling motor
Easy fix
Power supply: 220-240 V, 50-60 Hz
Energy Class: A+
Suspended ceiling height:
min 200 mm - max 280 mm
"Filtering mode" option not available for this model

accessories:
canalization systems and silencing kits, see p. 271



 **LED colour temperature selector**
The colour temperature of the Breeze hood can be changed according to the environment in which it is installed, choosing among a warm, natural or cold light.

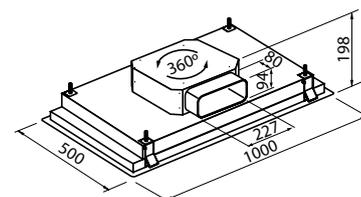

cut-out: 473 x 970 mm

Breeze white

2537 101
100 cm


Ceiling suction hood
Finish: **white painted steel**
Remote control included
3 grease filters
4 speeds
Illumination 2 LED strip
(2.700/4.000/5.500 kelvin)
Perimetric aspiration
Automatic delayed shutdown

Air flow rate: **930 m³/h**
Air exhaust hole: 230x80 mm
Motor power: 85 W
Silence Plus motor
360° Swiveling motor
Easy fix
Power supply: 220-240 V, 50-60 Hz
Energy Class: A+
Suspended ceiling height:
min 200 mm - max 280 mm
"Filtering mode" option not available for this model

accessories:
canalization systems and silencing kits, see p. 271




 **LED colour temperature selector**
The colour temperature of the Breeze hood can be changed according to the environment in which it is installed, choosing among a warm, natural or cold light.

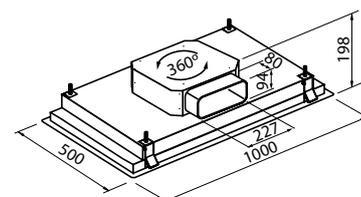

cut-out: 473 x 970 mm

New Sky



Ref.	Technical Drawing
------	-------------------


New Sky 100 stainless steel

2522 100
100 cm



Ceiling suction hood
Finish:
satin stainless steel
Remote control included
2 grease filters
4 speeds
Perimetric aspiration
Brushless motor
Automatic delayed shutdown
360° Swiveling motor

Air flow rate: 930 m3/h
Air exhaust hole: 230x80 mm
Motor power: 85 W
Power supply: 220-240 V, 50-60 Hz
Energy Class: A+

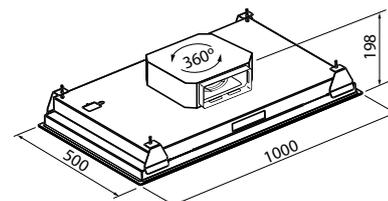

cut-out: 970 x 473 mm

Suspended ceiling height:
min 200 mm / max 280 mm

“Filtering mode” option not available for this model

accessories:

canalization systems and silencing kits, see p. 271




New Sky 100 white

2522 110
100 cm



Ceiling suction hood
Finish:
white painted steel
Remote control included
2 grease filters
4 speeds
Perimetric aspiration
Brushless motor
Automatic delayed shutdown
360° Swiveling motor

Air flow rate: 930 m3/h
Air exhaust hole: 230x80 mm
Motor power: 85 W
Power supply: 220-240 V, 50-60 Hz
Energy Class: A+

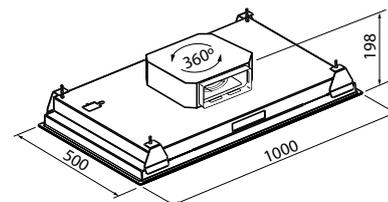

cut-out: 970 x 473 mm

Suspended ceiling height:
min 200 mm / max 280 mm

“Filtering mode” option not available for this model

accessories:

canalization systems and silencing kits, see p. 271





Ghost

Receding completely into the worktop, the Ghost hoods **combine functionality and performance with an essential and classy design**. The 120 version has been engineered for a perfect matching with the many in-line solutions of Foster, both gas and induction.

Ghost

Ref.

Technical Drawing

Ghost 90 Flush-mount





2451 090



Flush-mount table hood
 Finish:
satin stainless steel AISI 304 - black glass
Touch control
 2 grease filters
 4 speeds
 LED Strip illumination (5W - 4.200 kelvin)
 Automatic delayed shutdown
 Filter-cleaning alarm
 Optional filtering operation mode

Air flow rate: **760 m³/h**
 Height from floor: 300 mm
 Dimensions on the worktop: 875x120 mm
 Cut-out:
 - on-top built-in: 842x100 mm
 - flush-mount built-in: see drawing beside
 Air exhaust hole: Ø 120/150 mm
 Motor power: 275 W
 Power supply: 220-240 V, 50-60 Hz
Energy Class: A

Note: the motor can be positioned frontally, on the back of the hood or detached, by means of the specific optional kit (see drawing here next)

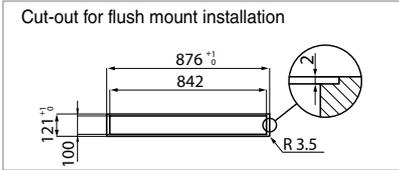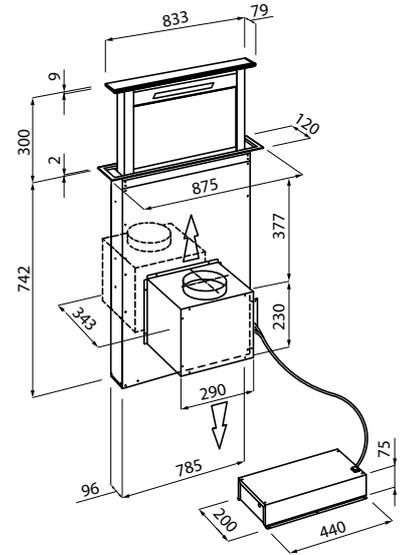

Ghost 120 Flush-mount





2451 120



Flush-mount table hood
 Finish:
satin stainless steel AISI 304 - black glass
Touch control
 2 grease filters
 4 speeds
 LED Strip illumination (9W - 4.200 kelvin)
 Automatic delayed shutdown
 Filter-cleaning alarm
 Optional filtering operation mode


Air flow rate: **800 m³/h**
 Height from floor: 300 mm
 Dimensions on the worktop: 1175x120 mm
 Cut-out:
 - on-top built-in: 1142x100 mm
 - flush-mount built-in: see drawing beside
 Air exhaust hole: Ø 120/150 mm
 Motor power: 275 W
 Power supply: 220-240 V, 50-60 Hz
Energy Class: A

Note: the motor can be positioned frontally, on the back of the hood or detached, by means of the specific optional kit (see drawing here next)

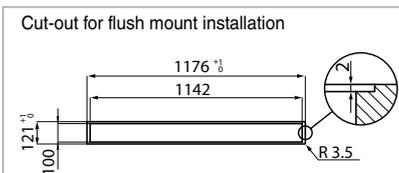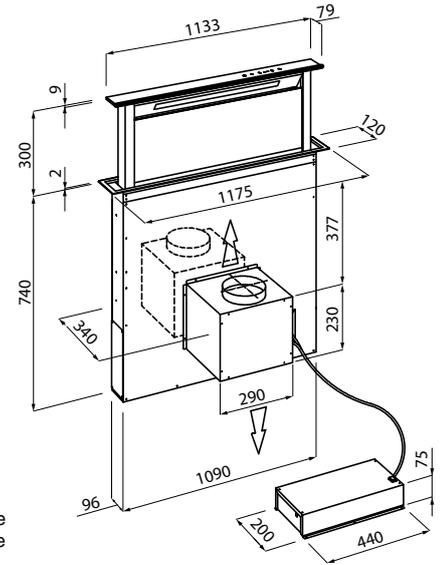

Remote motor installation schemes

The parts in red in the drawing represent a kit for installation of the engine remotely, up to a distance of 5 meters.

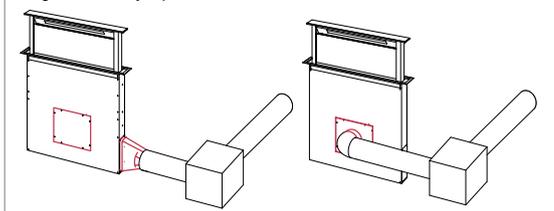

accessories:

	Ref.
2 carbon filters kit	9700 460
remote motor installation kit	9700 459

S4000 Domino Ghost



Ref.

Technical Drawing

S4000 Domino Ghost

2451 000

Table-top hood

Finish:

satin stainless steel - black glass**Touch control****Suction on both sides**

1 grease filter

4 speeds

Automatic delayed shutdown

Filter-cleaning alarm

Optional filtering operation mode

Air flow rate: **640 m³/h**

Adjustable height from table 180-300 mm

Dimensions on the worktop: 520x120 mm

Cut-out: 490x104 mm

Air exhaust hole: Ø 120/150 mm


Motor power: 275 W

Power supply: 220-240 V, 50-60 Hz

Energy Class: B



available until exhaustion

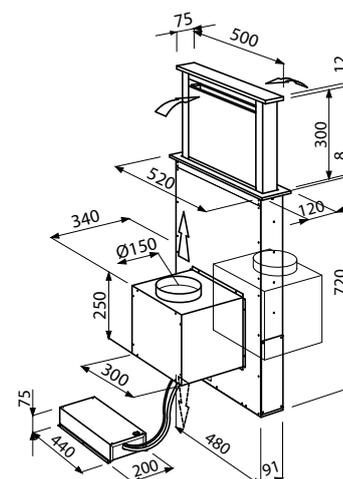


The Ghost hoods offer a great easiness of installation: the motor can be positioned frontally, on the back of the hood or detached, by means of the specific optional kit (see drawing here next)



Remote motor installation schemes

The parts in red in the drawing represent a kit for installation of the engine remotely, up to a distance of 5 meters.

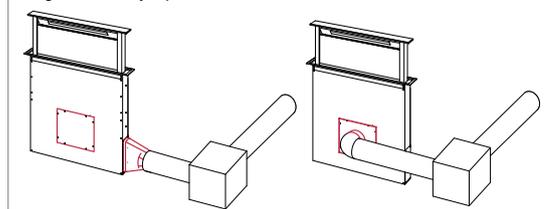

accessories:

2 carbon filters kit

Ref.
9700 450

remote motor installation kit

9700 459

Domino Air



Model	Ref.	Price €	Technical Drawing
-------	------	---------	-------------------


Foster Domino Air  

Domino 2455 000



- Table hood
- Finish: **black glass**
- Touch control**
- 1 stainless steel grease filters
- 4 speeds
- Automatic delayed shutdown
- Filter-cleaning alarm
- Optional filtering operation mode

Air flow rate: **490 m3/h**
 Height from floor: 140 x 520 mm
 Q4 cut-out: 126 x 490
 FT cut-out: vedi sito web
 Air exhaust hole: 220 x 90 mm
 Motor power: 190 W
 Power supply: 220-240 V, 50-60 Hz
Energy Class: B

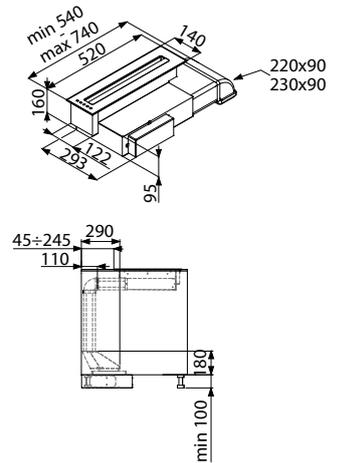


 **Do not use in combination with gas cooker hobs.**

available until exhaustion



accessories:

	Ref.
Professional Long Life filter for kitchen plinth	9700 574
Active charcoal refill for plinth filter	9700 575
canalization systems and silencing kits, see p. 271	

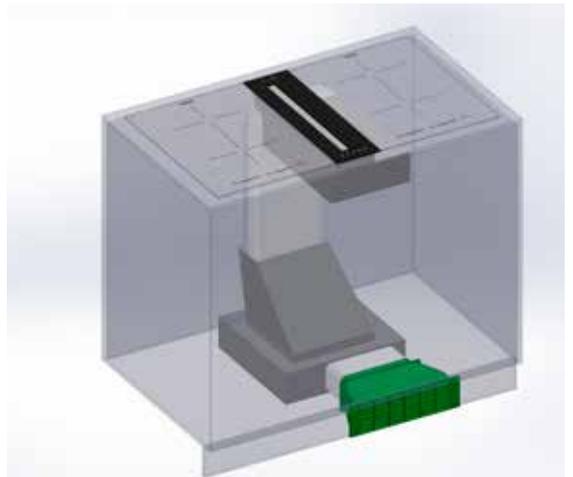

Installation scheme for Domino Air hood in filtering mode with active carbon plinth filter.



length mm	Ref.	Technical Drawing
-----------	------	-------------------

S4001 Special - island

Suction hood system with telescopic chimney and customizable length.

Finish:
AISI 304 satin stainless steel
Brushless motor - High Performance
 Minimal-design electronic commands
 2 grease filters
 4 speeds

Lighting: with LED spots, 1W (5.600 Kelvin) see chart
Perimetric aspiration
 Delayed automatic turn-off.
 Optional filtering operation mode
 Telescopic rods in $\varnothing 28 / 25$ mm tube.
 4 suction plates (120 cm) in central position

Chimney in central position.
 Total air flow rate: **700 m³/h**
 Chimney height: 810 – 1220 mm
 Air exhaust hole: $\varnothing 120/150$ mm
 Power supply: 220-240 V, 50-60 Hz
 Motor power: 160 W


Energy Class: see chart

Length	N. of light spots LED	Energy Class
1201 - 1500	18	A
1501 - 2100	24	A
2101 - 3000	30	A

1201 - 1500 2442 150

1501 - 2100 2442 210

2101 - 3000 2442 300

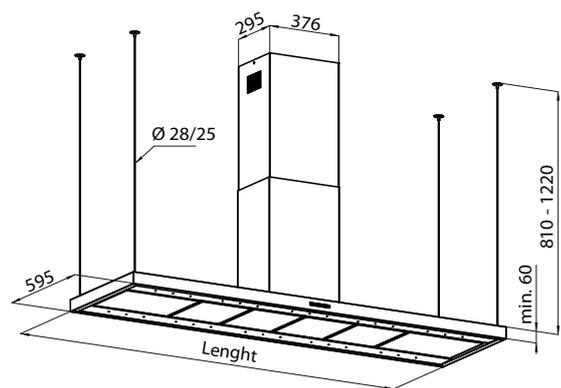

Optional with price surcharge, upon request:

- Ladle-rod
- Large steel shelf (min. thickness 30 mm)
- Rods with steel cable ($\varnothing 3\text{mm}^*$)
- Vintage steel finish
- Off-center chimney
- Shaped chimney for sloping ceiling
- Out-of-square Hood side
- Fixed cylindrical rods $\varnothing 10$ mm
- Hidden steel wall-support brackets
- Increased hood body depth

* Not compatible with large steel shelf.

accessories:

carbon filters kit - **Long Life**
 canalization systems and silencing kits, see p. 271

Ref.
9700 001



S4001



Ref.	Technical Drawing
------	-------------------

S4001 wall

2440 091

90 cm

2440 121

120 cm

Wall-mounted suction hood with telescopic chimney

Finish: **AISI 304** satin stainless steel

Brushless Motor - High Performance

Easy electronic control

2 grease filters

4 speeds

LED illumination: 6 x 1W (5.600 Kelvin)

Perimetric aspiration

Automatic delayed shutdown

Optional filtering operation mode

Air flow rate: **700** m3/h


Chimney height: 630 – 1050 mm

Air exhaust hole: Ø 120/150 mm

Motor power: 160 W

Power supply: 220-240 V, 50-60 Hz

Energy Class: A+

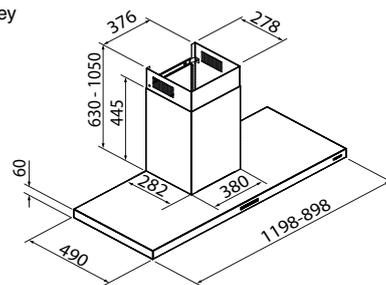

* **Long-Life filters** ensure high efficiency with a lifespan of three years. A Long-Life filter can be easily "regenerated" with simple operations, thus recovering the functionality of a new filter.

accessories:

carbon filter kit - **Long Life***

canalization systems and silencing kits, see p. 271

Ref.

9700 001

S4001 island

2442 091

90 cm

2442 121

120 cm

Wall-mounted suction hood with telescopic chimney

Finish: **AISI 304** satin stainless steel

Brushless Motor - High Performance

Easy electronic control

2 grease filters

4 speeds

LED illumination: 12 x 1W (5.600 Kelvin)

Perimetric aspiration

Automatic delayed shutdown

Optional filtering operation mode

Air flow rate: **700** m3/h


Chimney height: 810 – 1220 mm

Air exhaust hole: Ø 120/150 mm

Motor power: 160 W

Power supply: 220-240 V, 50-60 Hz

Energy Class: A+

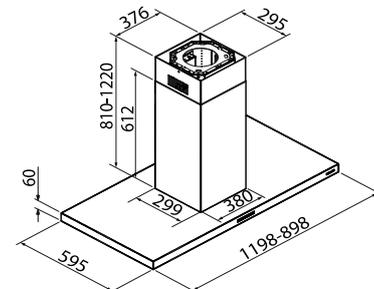

* **Long-Life filters** ensure high efficiency with a lifespan of three years. A Long-Life filter can be easily "regenerated" with simple operations, thus recovering the functionality of a new filter.

accessories:

carbon filter kit - **Long Life***

canalization systems and silencing kits, see p. 271

Ref.

9700 001

Cilindro




	Ref.		Technical Drawing
--	------	--	-------------------

Cilindro wall

2531 001



Wall-mounted suction hood
 Finish:
 AISI 304 satin stainless steel
Brushless Motor
 Easy electronic control
1 Stainless steel grease filter
 4 speeds
LED illumination: 4 x 1,2W (5.500 Kelvin)
 Automatic delayed shutdown
 Optional filtering operation mode

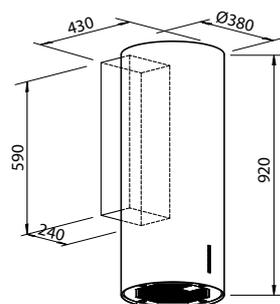

Air flow rate: **700 m3/h**
 height: 920 mm
 Air exhaust hole: Ø 120/150 mm
 Motor power: 160 W
 Power supply: 220-240 V, 50-60 Hz
Energy Class: A+

	Ref.
carbon filter	9700 380
canalization systems and silencing kits, see p. 271	




Cilindro island

2530 001



Wall-mounted telescopic suction hood
 Finish:
 AISI 304 satin stainless steel
Brushless Motor
 Easy electronic control
1 Stainless steel grease filter
 4 speeds
LED illumination: 4 x 1,2W (5.500 Kelvin)
 Automatic delayed shutdown
 Optional filtering operation mode

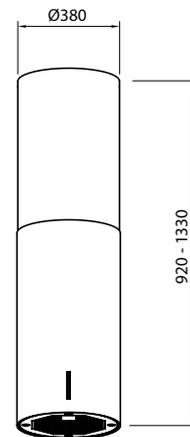

Air flow rate: **700 m3/h**
 height: 920 – 1330 mm
 Air exhaust hole: Ø 120/150 mm
 Motor power: 160 W
 Power supply: 220-240 V, 50-60 Hz
Energy Class: A+

accessories:	Ref.
carbon filter	9700 380
canalization systems and silencing kits, see p. 271	



FL Slim



Model	Ref.	Technical Drawing
-------	------	-------------------

FL Slim black mirror


black mirror	2450 690
hood body	90 cm
white	2450 190
hood body	90 cm
telescopic chimney kit	2454 000



Wall-mounted linear suction hood with telescopic chimney (optional)
Finish: **satin stainless steel, Black Mirror or White tempered glass**
Touch control

5 stainless steel grease filter
4 speeds
Illumination 2x2,1 W LED (4.000 kelvin)
Auto-mode functioning with temperature detector
Double aspiration: from below and front side
Automatic delayed shutdown 5-10-20"
Optional filtering operation mode

Air flow rate: **725 m³/h**
Chimney height (optional):
for suction mode: 320-500 mm
for filtering mode: 370-560 mm
Air exhaust hole: Ø 120/150 mm
Motor power: 175 W
Power supply: 220-240 V, 50-60 Hz
Energy Class: A

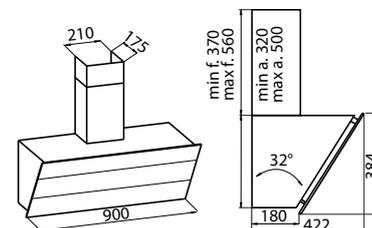

FL Slim white

**accessories:**

carbon filter
canalization systems and silencing kits, see p. 271

Ref.

9700 524



Stripe and **FL Slim** are equipped with a **double suction**, with 5 steel filters positioned below and on the front of the hood. The glass panel, opening up, further improves the flow of air.

Stripe



	Model	Ref.	Technical Drawing
--	-------	------	-------------------

Stripe 90 Black Mirror


hood body	2450 090	90 cm	
telescopic chimney kit	2454 000		



available until exhaustion

Wall-mounted linear suction hood with telescopic chimney (optional)
 Finish: **satin stainless steel, Black Mirror tempered glass**
Touch control
 5 stainless steel grease filter
 4 speeds
 Illumination 2x2,1 W LED (4.000 kelvin)
 Auto-mode functioning with temperature detector
Double aspiration: from below and front side
 Automatic delayed shutdown 5-10-20"
 Optional filtering operation mode

Air flow rate: **725 m³/h**
 Chimney height (optional):
 for suction mode: 320-500 mm
 for filtering mode: 370-560 mm
 Air exhaust hole: Ø 120/150 mm
 Motor power: 175 W
 Power supply: 220-240 V, 50-60 Hz
Energy Class: A

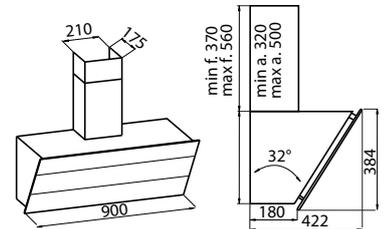

accessories:	Ref.
carbon filter	9700 524
canalization systems and silencing kits, see p. 271	



KS Lux



KS Lux	Ref.	Technical Drawing
--------	------	-------------------

KS Lux

2504 094
90 cm




Wall-mounted linear suction hood with telescopic chimney
Finish: satin stainless steel
Electronic control
Stainless steel grease filters

Auto-mode functioning with temperature detector
3 plus 1 intensive timed speeds
LED illumination (4.000 kelvin)
n. 2 Led

Automatic delayed shutdown
Optional filtering operation mode
n. 3 grease filters

Air flow rate: **700 m³/h**
Chimney height:
for suction mode 630 – 1050 mm
for filtering mode 700 – 1120 mm
Air exhaust hole: Ø 120/150 mm
Motor power: 250 W
Power supply: 220-240 V, 50-60 Hz
Energy Class: A

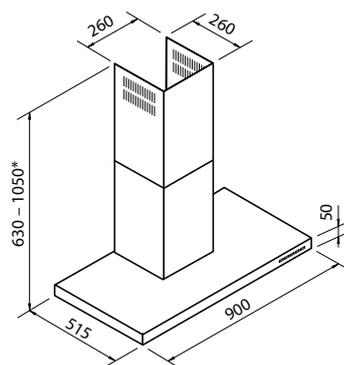

*chimney height in filtering mode is:
min 700 - max 1120



accessories:

- carbon filter
- canalization systems and silencing kits, see p. 271

Ref.
9700 528

KS



KS	Ref.	Technical Drawing
----	------	-------------------




2406 002
60 cm

2409 002
90 cm

Wall-mounted linear suction hood with telescopic chimney
 Finish:
 satin stainless steel
 Mechanical push-button control
 grease filters
 90 cm hood: 3 filters
 60 cm hood: 2 filters
 3 speeds
 LED illumination 2 x 1,2 W (4.000 kelvin)
 Optional filtering operation mode

Air flow rate: **450 m3/h**
 Chimney height: 590 – 840 mm
 Air exhaust hole: Ø 120 mm
 Motor power: 125 W
 Power supply: 220-240 V, 50 Hz
Energy Class: A

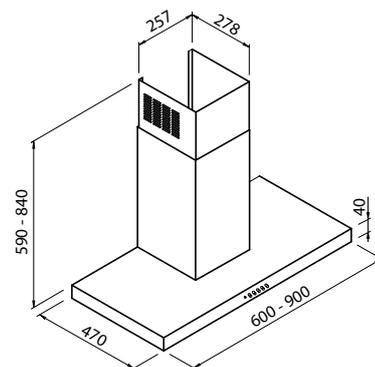

available until exhaustion



accessories:

carbon filter	Ref. 9700 402
canalization systems and silencing kits, see p. 271	



Ref. Technical Drawing

Florence

2538 091

90 cm

2538 121

120 cm

Wall-mounted linear suction hood with telescopic chimney
 Finish: satin stainless steel
 Backlit electronic commands
 Anti-fat, professional Baffle filters in stainless steel
 3 operating speeds plus 1 timed intensive speed
 Illumination (3.000 kelvin):
 - mod. 90: 2 x 2,1 W spot LED
 - mod. 120: 3 x 2,1 W spot LED
 Automatic delayed shutdown
 Optional filtering operation mode


Air flow rate: **730 m³/h**

Chimney height:
 In suction mode 830 – 1450 mm
 in filtering mode 1005 – 1450 mm

Air flow rate: Ø 120/150 mm

Motor power: 150 W - Power supply: 220-240 V, 50-60 Hz

Energy Class: A

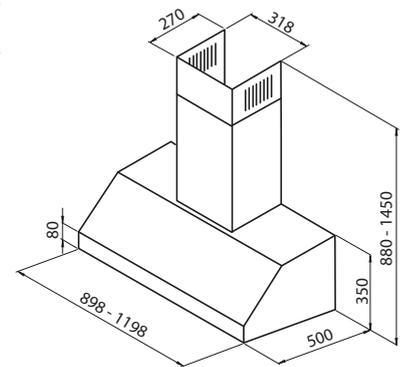

accessories:

- carbon filter
- canalization systems and silencing kits, see p. 271

Ref.

9700 292



Professional not only for the look: the Baffle filters guarantee a superior performance in fat filtering.

Pitagora



Ref.


Technical Drawing

Pitagora 90x90

2439 003



Corner suction hood with telescopic chimney section
 Finish:
AISI 304 satin stainless steel
 Easy electronic control
 2 grease filters
 4 speeds
 LED illumination (2x1,2 W) - 4.000 kelvin
 Automatic delayed shutdown
 Optional filtering operation mode

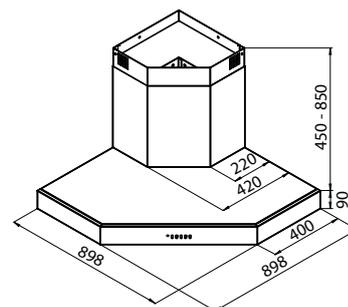

Air flow rate: **750 m³/h**
 Chimney height: 450 – 850 mm
 Air exhaust hole: Ø 150 mm
 Motor power: 250 W
 Power supply: 220-240 V, 50-60 Hz
Energy Class: A



accessories:

Ref.

carbon filter
 canalization systems and silencing kits, see p. 271

9700 409

Pitagora is the perfect hood for the corner cooking solutions of Foster Quadra Angolare, page 231 Angolare, page 247



Amélie



CLASS

Ref.


Technical Drawing

Amélie

2447 090
90 cm

Wall-mounted linear suction hood
with telescopic chimney
Finish: satin stainless steel
Soft touch control
3 grease filters
3 speeds
Illumination 2x2,1 W LED (4.000 kelvin)
Optional filtering operation mode

Air flow rate: **620 m³/h**
Chimney height:
for suction mode: 580-1000 mm
for filtering mode: 650-1070 mm
Air exhaust hole: Ø 120/150 mm
Power supply: 220-240 V, 50-60 Hz
Energy Class: A

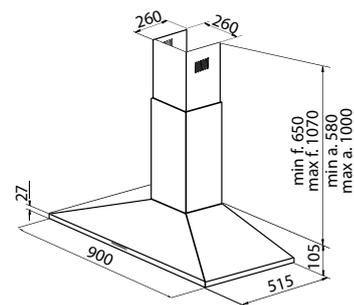**accessories:**

carbon filter
canalization systems and silencing kits, see p. 271

Ref.

9700 517



New Wing



A
CLASS


Ref.	Technical Drawing
------	-------------------

New Wing




2512 062
60 cm
2512 092
90 cm

Under-cabinet built-in suction hood
 Finish: satin stainless steel / glass
Rotating knob
 Aluminium grease filters
 hood 60 cm: 2 filters
 hood 90 cm: 3 filters
 4 speeds
 2 LED illumination (4.000 kelvin)
Stainless steel protection profiles for the hanging cabinets
Telescopic depth regulator
 Hanging back-rest profile
 Optional filtering operation mode

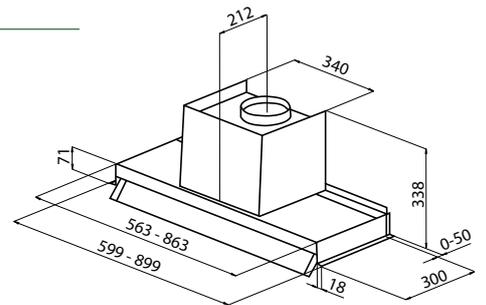

Air flow rate: 620 m3/h
 Air exhaust hole: Ø 150 mm
 Motor power: 210 W
 Power supply: 220-240 V, 50-60 Hz
Energy Class: A

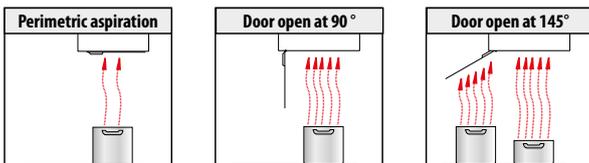

accessories:

carbon filter kit
 canalization systems and silencing kits, see p. 271

Ref.
 9700 221


Flat



Ref.	Technical Drawing
------	-------------------



2513 161	
60 cm	
2513 191	
90 cm	
2513 121	
120 cm	

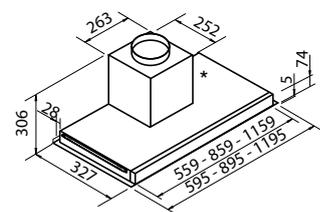

available until exhaustion

* telescopic chimney and box motor cover are optional fittings (see drawing below)



The hood is to be fixed to the shoulders of the hanging cabinet

Under-cabinet built-in suction hood
 Optional stainless steel telescopic chimney and box motor cover
Finish: white glass
 Touch control
 Grease filter
 60 cm hoods: 1 filter
 90 cm hoods: 2 filters
 120 cm hood: 4 filters
 4 speeds


LED stripe illumination (4.200 kelvin)
 Automatic delayed shutdown
Perimetric aspiration
 Optional filtering operation mode
 Air flow rate: **750 m³/h**
 Air exhaust hole: Ø 120/150 mm
 Motor power: 275 W
 Power supply: 220-240 V, 50-60 Hz
Energy class: A

Flat

Ref.	Technical Drawing
------	-------------------



2513 061	available
60 cm	until exhaustion
2513 091	
90 cm	
2513 021	
120 cm	

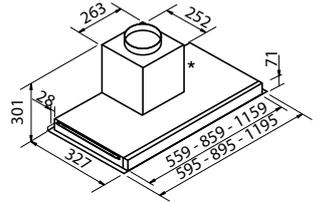

* telescopic chimney and box motor cover are optional fittings (see drawing below)



The hood is to be fixed to the shoulders of the hanging cabinet

Under-cabinet built-in suction hood
 Optional stainless steel telescopic chimney and box motor cover
 Finish: satin stainless steel
Remote control included
 Easy electronic control
 Grease filter: 60 cm hoods: 1 filter
 90 cm hoods: 2 filters - 120 cm hood: 4 filters
 4 speeds

LED stripe illumination (4.200 kelvin)
 Automatic delayed shutdown
Perimetric aspiration
 Optional filtering operation mode
 Air flow rate: **750 m³/h**
 Air exhaust hole: Ø 120/150 mm
 Motor power: 275 W
 Power supply: 220-240 V, 50-60 Hz
Energy class: A

***TELESCOPIC CHIMNEY AND BOX MOTOR COVER DIMENSIONS**

Flat white

Flat inox

Flat hoods accessories:	Ref.
carbon filter	9700 600
canalization systems and silencing kits, see p. 271	
stainless steel telescopic chimney	2539 000
box motor cover	2539 200



DISHWASHERS



Programs: in the Foster range you can choose freely between sets of practical and essential programs or a complete sophisticated programming suited for every individual need.




Half Load: saving time and energy with the half-load setting. Available on all programs.



Acquastop: stops the water supply and prevents leaks and overflows at source. It is a standard equipment on all models.



Delayed programming: It is possible to program a delayed start of the dishwasher, and thus to optimize the energy consumption during the day.



Adjustable basket: the upper basket is simple to adjust in height, even when fully loaded. This allows better space management according to washing needs.



Tabs "All in 1": this option guarantees perfect results with all kinds of detergent. Once it is activated, the washing cycle is adapted to the practical "all in 1" Tabs instead of the regular detergent.

Dishwashers

KS Plus NEW

Ref.

fully built-in dishwasher 2941 001



available until exhaustion

Energy class F


Place-setting capacity: 13

Energy consumption: 103 kWh/100 Eco cycles
water consumption per cycle: 12 litres
Noise level: 48 dB(A), class C

10 washing programs:

soaking: crystal, eco, quick, auto, baby-care, eco-rapid, delicate rapid, daily clean, intensive rapid
Elevated lower basket
Adjustable central basket (3-position button)
Cutlery basket

Acquastop safety system
Distributed Half Load Option
24 hour delayed programming
Sanitation program
Low salt-rinsing agent indicators
Setting for all-purpose detergents (3 in 1 button)
End-of-cycle indicator:
Acoustic + floor light
Door panel connection with slider and fix system
Frontal adjustment of rear feet 0-70 mm

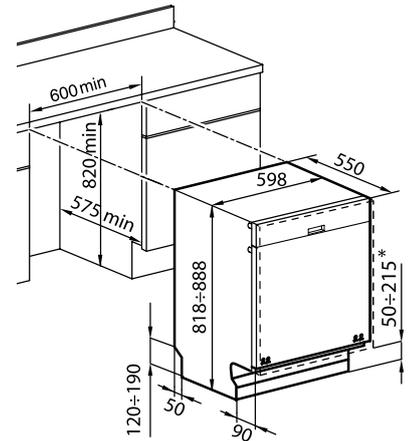

Technical data
voltage rating:
220-240 V - 50Hz

Door panel dimension limits:
thickness 18-28 mm
height (with fixed panel) 660-720 mm
height (with slider panel) 660-770 mm
weight: 2,5 - 11 Kg
plinth dimensions: 50±215 mm*

* with slider panel

Accessories: Stainless steel door panel – for fixed door panel



Elettra NEW

Ref.

fully built-in dishwasher 2950 002



Energy class E


Place-setting capacity 12

Energy consumption: 92 kWh/100 Eco cycles
water consumption per cycle: 12 litres
Emission rumore: 47 dB(A) classe C
Electronic programming

5 washing programs:

intensive, pre-washing, quick 30', eco, daily clean.

Half-load function
Acquastop safety system
19 hour delayed programming
Low salt-rinsing agent indicators
Upper basket adjustable in height at full load
Adjustable cutlery basket
Frontal adjustment of rear feet
Feet adjustment 0-50 mm

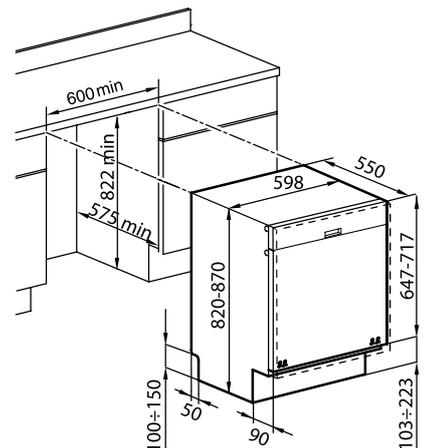

Technical data
voltage rating:
220-240 V - 50Hz

Door panel dimension limits:
height 647-717 mm
weight: 3 - 8 Kg

Accessories: Stainless steel door panel



accessories

Stainless steel door panel



Ref.
2910 018

finish: AISI 304 satin-finish
size: 595x716x20 mm

The integrated handle is easy to couple with any kitchen door.
Compatible with KP Plus and Elettra dishwasher.

The custom-made products of Foster: stainless steel worktops


The custom-made products are among the most distinctive Foster productions.

To learn all the customization possibilities, in stainless steel and in composite materials, please check the relevant documents of the Companies of the **Foster Group** specialised in on-demand manufacturing:

www.bautek.it and www.fostersurfaces.it



One material, many different looks, thanks to the proposal ranging from the classic satin finish to the new rough and matt finishes and the "worn" look of the Vintage finish.

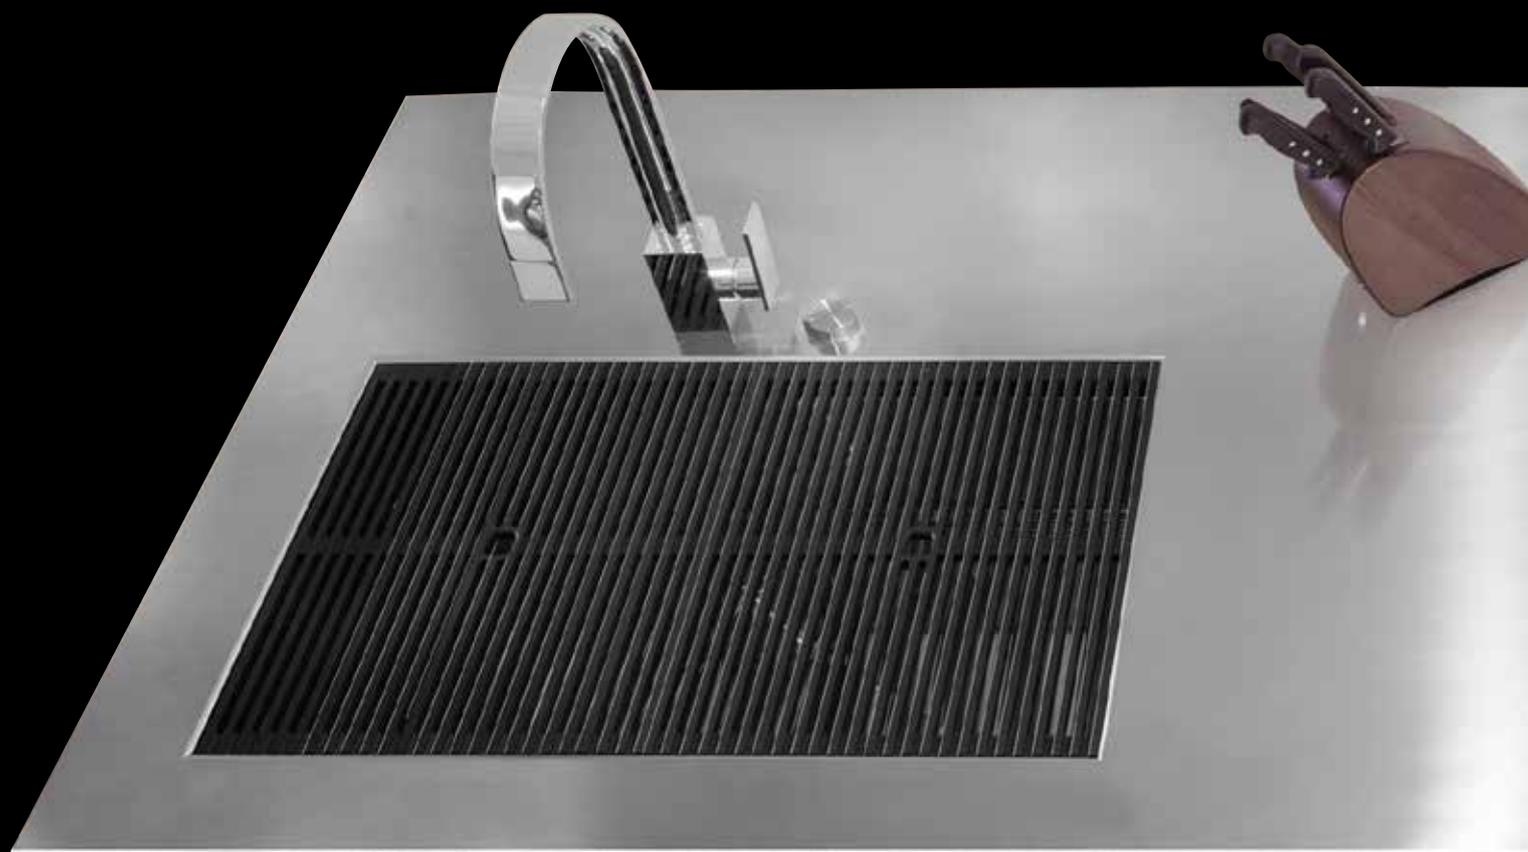


- Several finishes.
- Multiple profiles and thicknesses.
- Self-sustaining supports.
- Infinite solutions for each specific need.

A custom-made Foster worktop means also the safety of a top-grade traditional craftsmanship and of one manufacturer taking care of the whole product.



Also the out-of-sight parts are important. All our worktops are manufactured with first-grade raw materials and have an internal structure that makes them self-carrying.

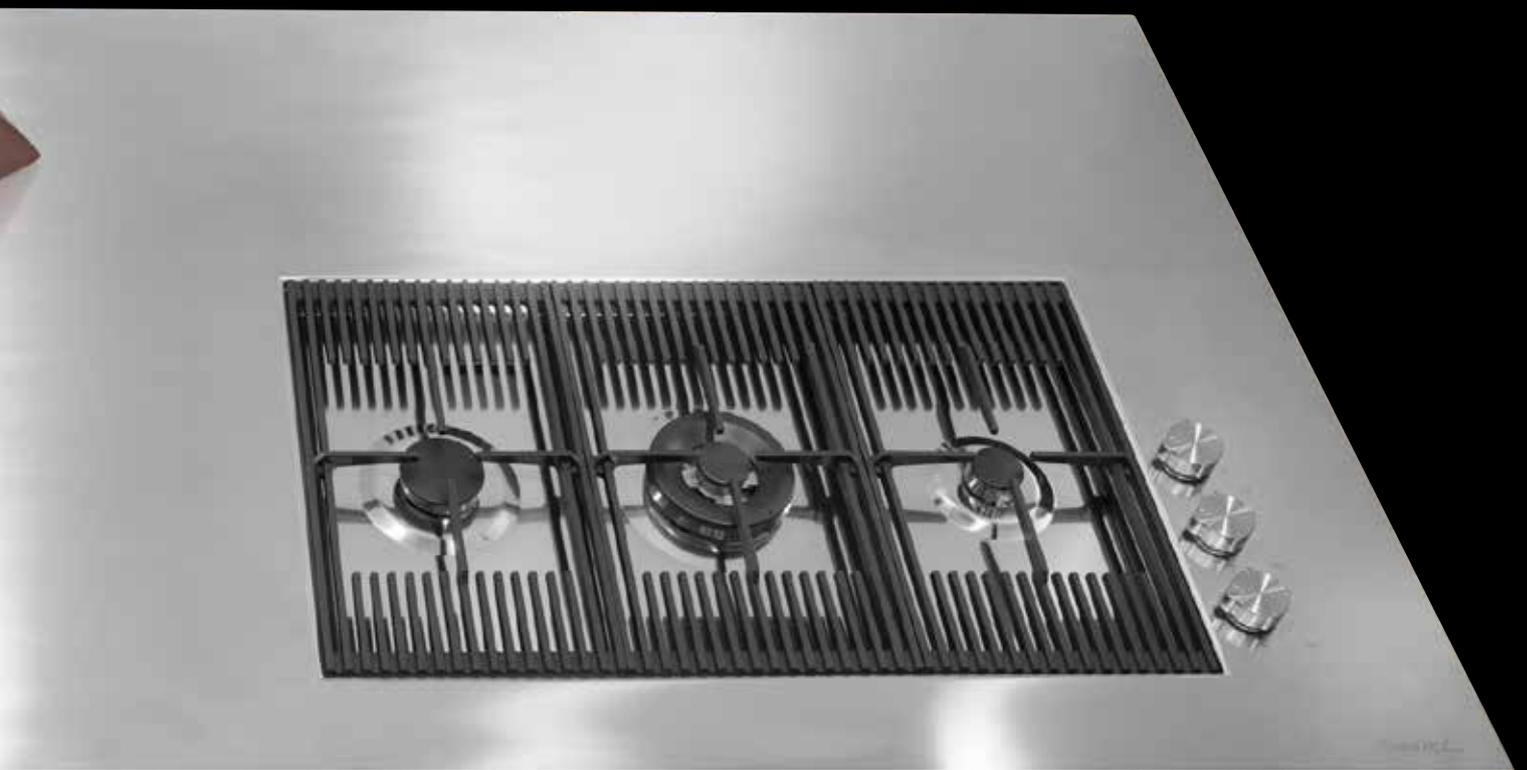



How to clean steel

Stainless steel products do not need any particular servicing. However, they do require a certain care and use of adequate detergents for daily cleaning. By and large, **all that's needed is to wash with hot water and soap or hot water and vinegar**, and thoroughly rinse and dry with a cloth. Do not use: hydrochloric acid, abrasive powders, steel wool, brushes and products for cleaning silver.

When it comes to detergents for cleaning steel, Foster recommends the products in the "Steel Clean" line:

- **microfiber cloth** to wipe off traces of grease and powder.
- **professional cream** to restore the original splendour of the steel, remove scaling, stubborn dirt and rust marks caused by contact with ferrous materials.



Steel Clean - cream
Detergent cream for stainless steel

250 ml bottle

Ref.	
8331 000	

pack of 12 pcs.

Ref.	
8331 012	



Steel Clean - microfiber
Microfiber cloths for cleaning stainless steel

pack of 3 pcs.

Ref.	
8333 000	

12 pack of 3 pcs.

Ref.	
8333 012	

Foster management system is ISO 9001:2015 certified
Registration number CH-36474



WARRANTIES

All Foster products conform to the EEC directive and are covered by the Foster 24-month warranty.

ASSISTANCE

We wish to provide you with products and service that meet your expectations. This is why Foster has a widespread network of Technical Assistance centres in Italy and abroad.

WORLDWIDE AFTER-SALES SERVICE

For an up to date list of Foster's technical assistance centres, consult our web site **www.fosterspa.com**



Each single item manufactured by Foster is branded CE, and is therefore made in compliance with the general regulations of the European Union. This publication is for international use. The features are purely guideline. We reserve the right to modify them at any moment without notice. The Foster organisation will be pleased to provide further details and updates about the products and services.

© Foster spa. Not to be reproduced wholly or in part without written permission of Foster spa.

Realized in collaboration with Maxistudio.

Foster 